



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1002		0537		REVISIONS			
GP	00	P	LR	DESCRIPTION	DATE	BY	APPD
		5		REVISED PER ECO-08-007327	17APR08	BM	WW

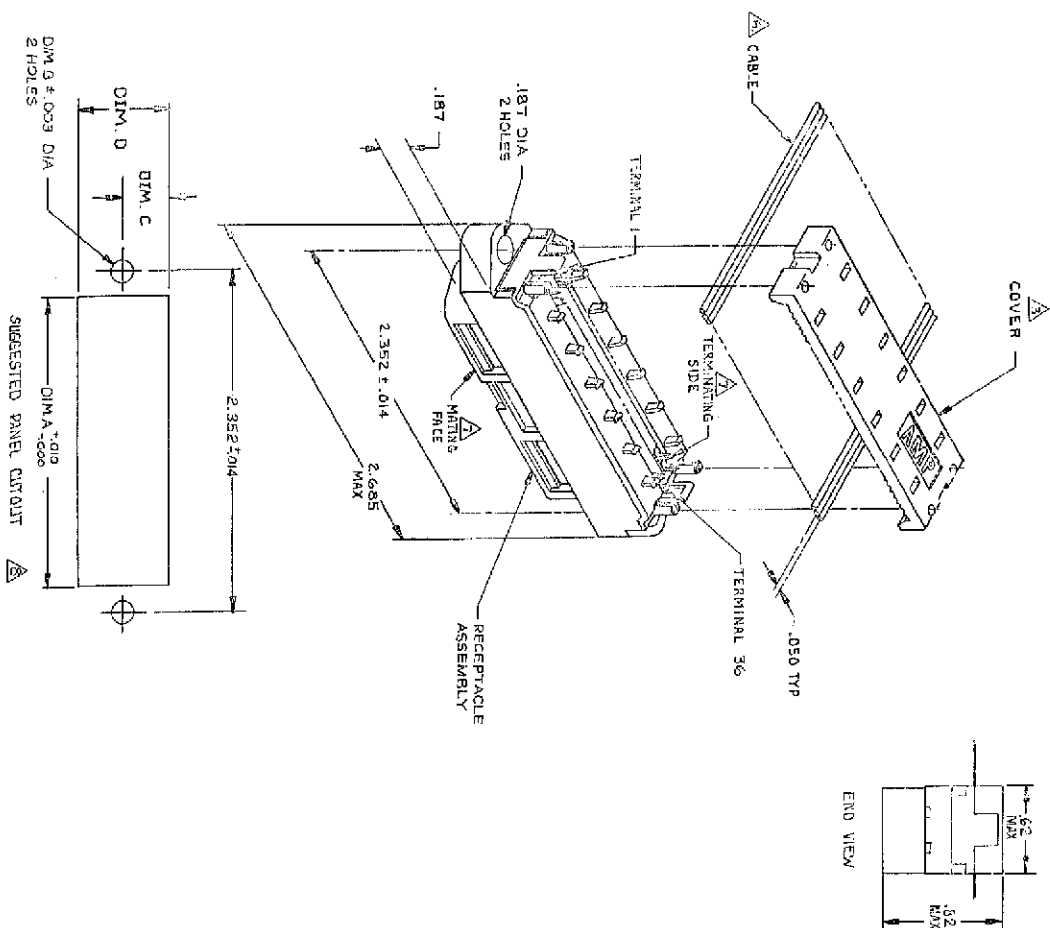

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- △ MATERIAL:  
HOUSING & COVER - THERMOPLASTIC, BLACK  
TERMINALS - PHOS. BRONZE PLATED WITH ETHER  
0.00030 MINIMUM GOLD PLATE OR GOLD FLASH  
OVER PALLADIUM NICKEL PLATE, .000030 MIN  
TOTAL ON MATING SURFACE. GOLD FLASH PLATED  
ON TERMINATING SIDE, .000030 MINIMUM NICKEL  
UNDERPLATE OVER ENTIRE TERMINAL.
- △ COVER SHOWN LOOSE BUT SHIPPED ASSEMBLED.
4. WIRE RANGE: 26 AWG SOLID THRU 30 AWG SOLID  
AND 28 AWG STRANDED RIBBON CABLE.
- △ ALL DIMENSIONS SHOWN ARE FOR REFERENCE  
ONLY UNLESS OTHERWISE SPECIFIED.
- △ FLAT CABLE SHALL BE FURNISHED BY CUSTOMER.
- △ MATING FACE CONSISTS OF TWO ROWS OF  
TERMINALS ON .085 CENTERS, TERMINATING SIDE  
CONSISTS OF TERMINALS ON .100 CENTERS FOR  
AN EFFECTIVE .050 TERMINATION.
- △ PANEL THICKNESS RANGE:  
FRONT PANEL MOUNTING - .125 MAX  
REAR PANEL MOUNTING - .062 MAX
9. FOR MORE INFORMATION REFER TO AMP PRODUCT  
SPECIFICATION 108-8078 & APPLICATION SPEC  
114-8030.

	DIM D	DIM C	DIM B	DIM A	DESCRIPTION
.620	.310	.149	2.085		REAR PANEL MOUNTING
.840	.320	.126	2.000		FRONT PANEL MOUNTING

[illegible]