Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!
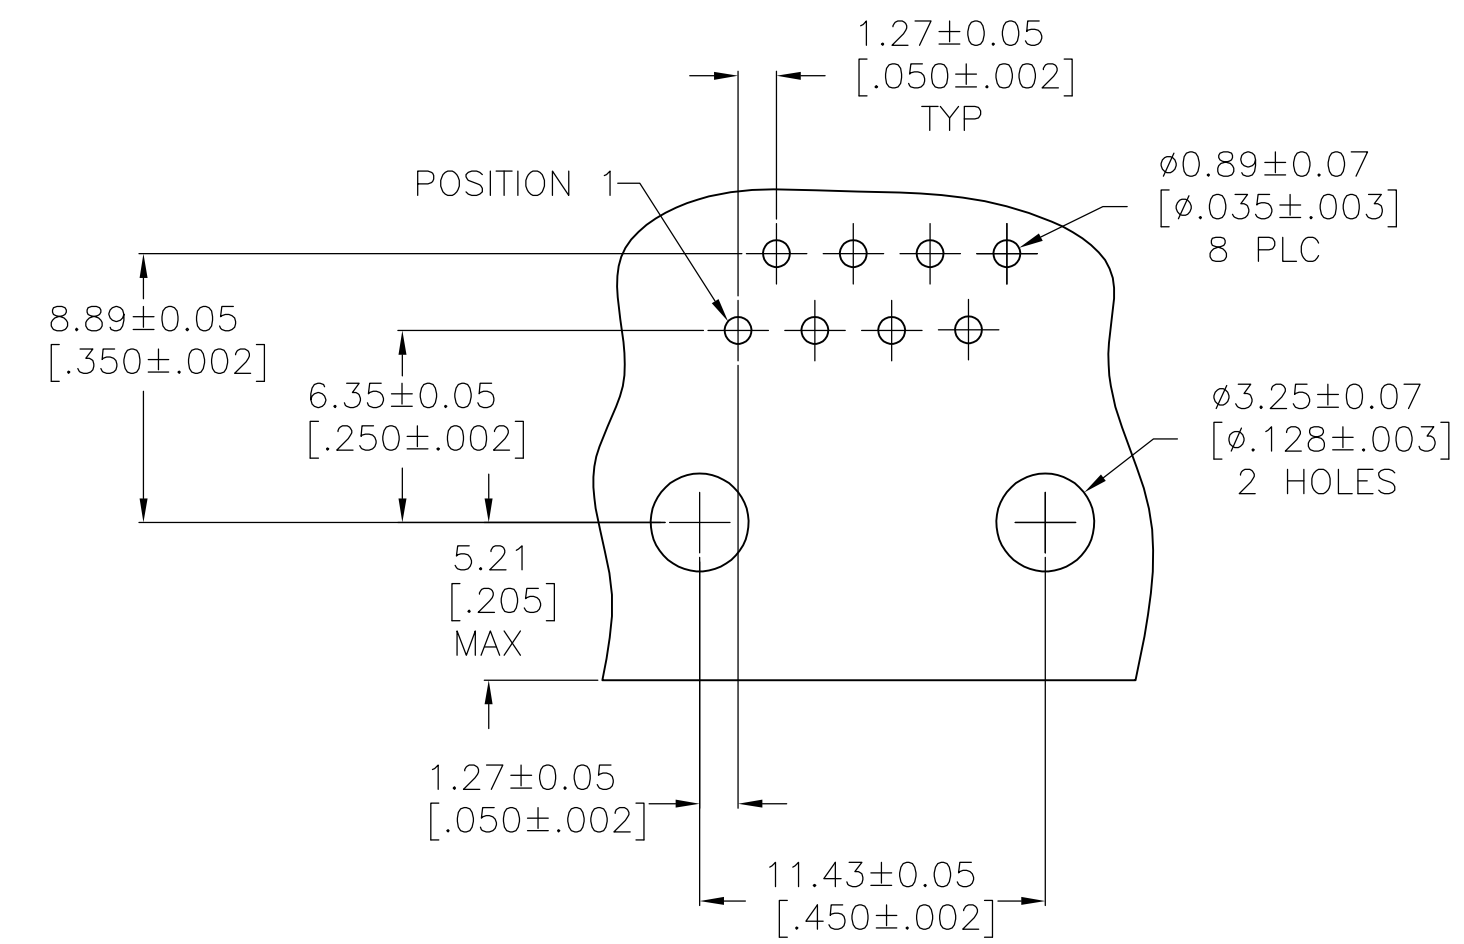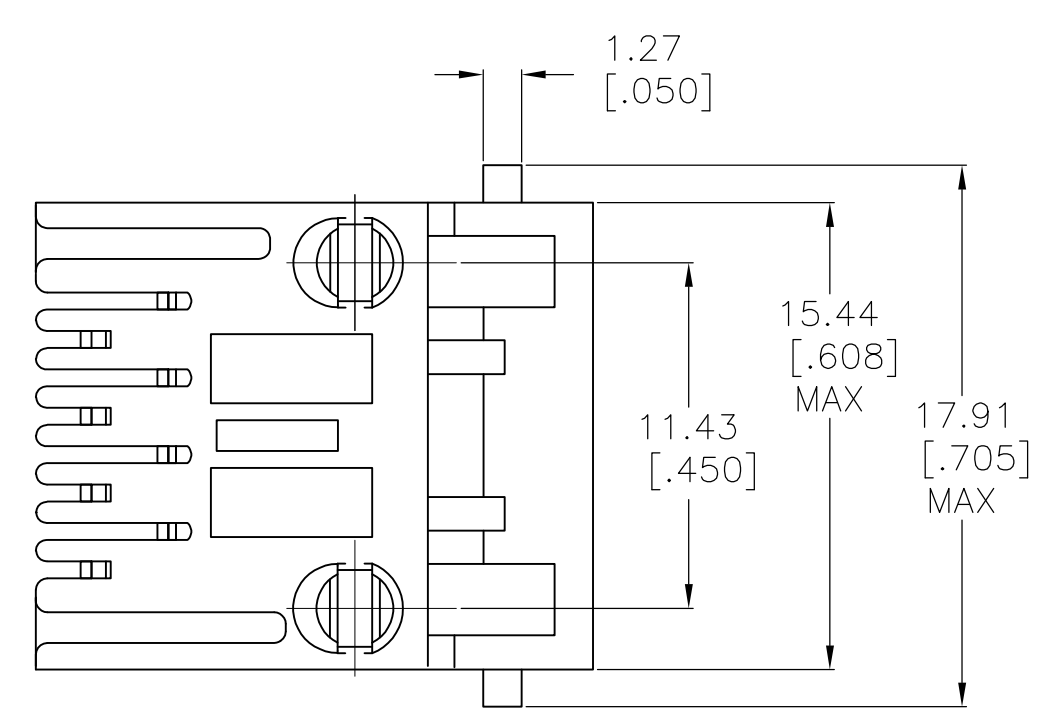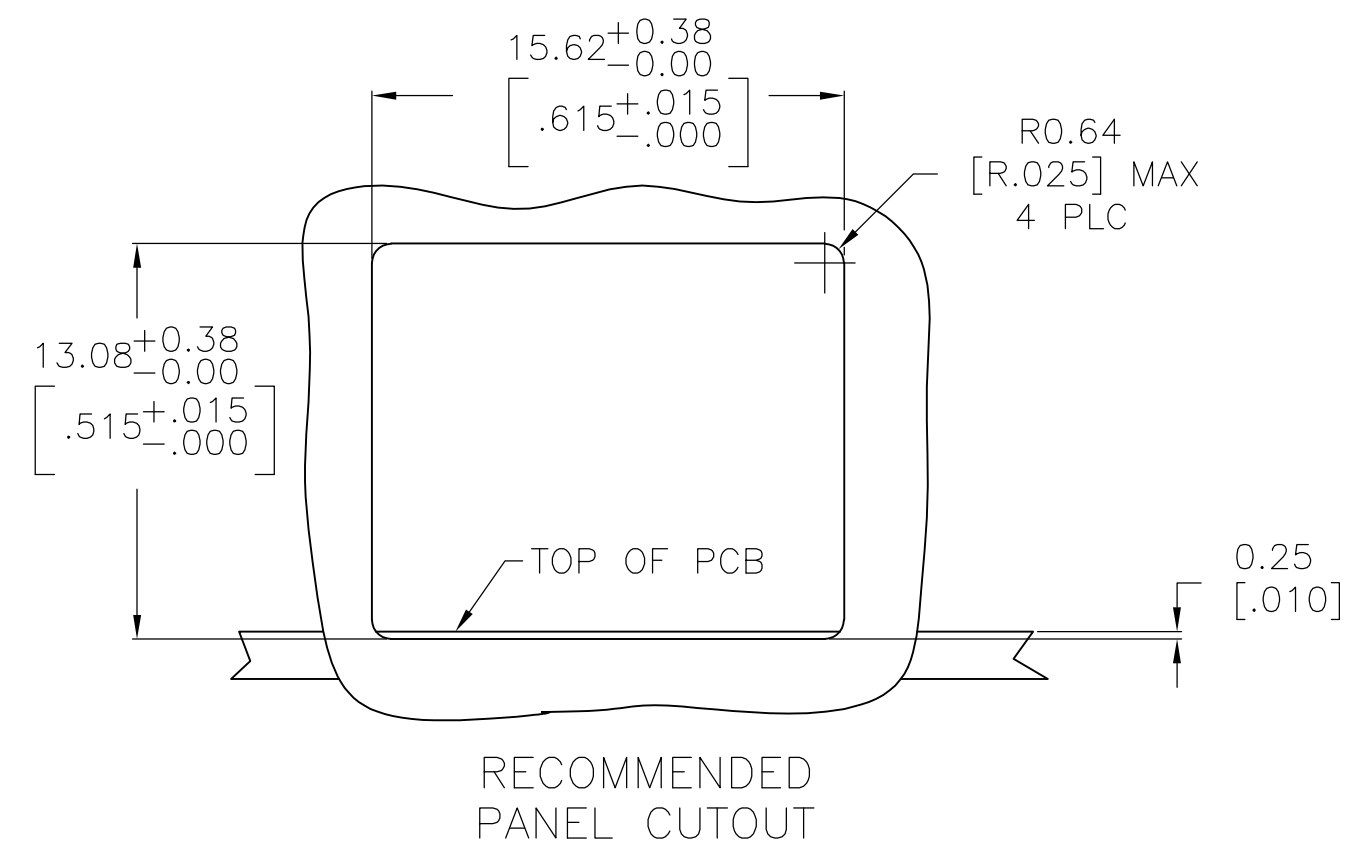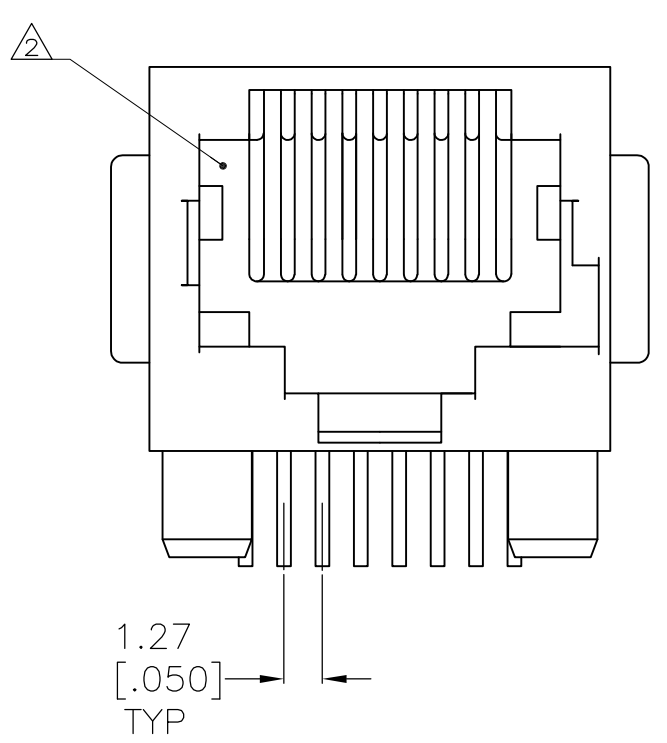

Contact us

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION -.- -.-

© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

LOC	DIST					
00	AA	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D1	REVISED PER ECO-11-005033	24MAR11	RK	HMR

1. MATERIAL: HOUSING — PBT POLYESTER, COLOR: BLACK

   TERMINAL — 0.36 [.014] THICK PHOS BRONZE PLATED WITH $1.27\mu m$ [.000050] MINIMUM THICK HARD GOLD IN LOCALIZED GOLD PLATE AREA AND $3.81\mu m$ [.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER $1.27\mu m$ [.000050] MINIMUM THICK NICKEL UNDERPLATE.

2. CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

18.42 [.725] MAX

2.36 [.093]

12.70 [.500]

3.81±0.51 [.150±.020]

3.69 [.145]

2.54 [.100]

7.87 [.310]

8.89 [.350]

1.27 [.050] TYP

$15.62^{+0.38}_{-0.00}$ $.615^{+.015}_{-.000}$

R0.64 [R.025] MAX 4 PLC

$13.08^{+0.38}_{-0.00}$ $.515^{+.015}_{-.000}$

TOP OF PCB

0.25 [.010]

RECOMMENDED PANEL CUTOUT

1.27 [.050]

15.44 [.608] MAX

11.43 [.450]

17.91 [.705] MAX

1.27±0.05 [.050±.002] TYP

POSITION 1

$\varnothing0.89\pm0.07$ [$\varnothing.035\pm.003$] 8 PLC

8.89±0.05 [.350±.002]

6.35±0.05 [.250±.002]

$\varnothing3.25\pm0.07$ [$\varnothing.128\pm.003$] 2 HOLES

5.21 [.205] MAX

1.27±0.05 [.050±.002]

11.43±0.05 [.450±.002]

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT COMPONENT SIDE SHOWN

8	5555166-1
TERMINALS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	GA/ L.A.MAYER	05MAR2008
CHK	P.RECCE	05MAR2008
APVD	S.FLICKINGER	05MAR2008

TE TE Connectivity

NAME: MODULAR JACK ASSEMBLY, 8 POSITION, LOW PROFILE, RIGHT ANGLE, KEYED WITH PANEL STOPS

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± 0.13[.005]
3 PLC	± -
4 PLC	± -
ANGLES	± - ± -

PRODUCT SPEC 108-1163

APPLICATION SPEC 114-2048

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
| A1 | 00779 | C-5555166 | - |

MATERIAL SEE NOTE 1

FINISH SEE NOTE 1

WEIGHT -

CUSTOMER DRAWING

SCALE 4:1   SHEET 1 OF 1   REV D1

4805 (3/11)