



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



2.5mm x 7mm Rectangular LED CBI® Circuit Board Indicator

Dialight

561-4x01-xxx

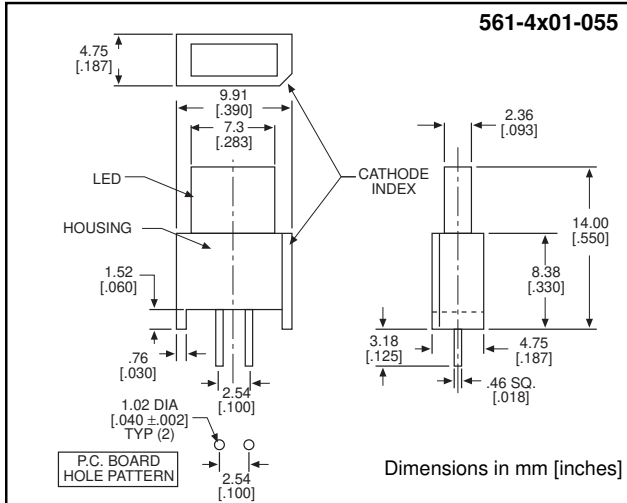


PART NO.

561-4101-xxx
561-4201-xxx
561-4301-xxx

COLOR

Red
Green
Yellow

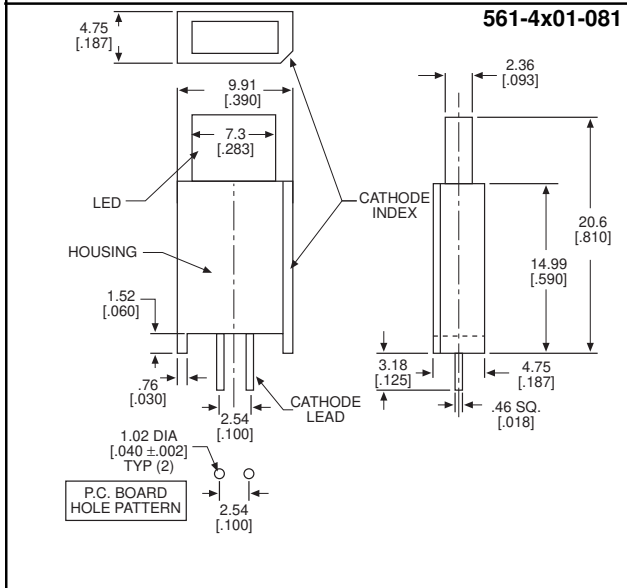


Benefits

- Available with a variety of LEDs
- Housing material meets UL94 V-0
- Rectangular shaped LED
- Black housing enhances contrast
- High reliability - life measured in years
- Vibration and shock resistant
- Standoffs on housing facilitate PC board cleaning

LED Data

- For absolute maximum ratings and other electrical/optical data refer to LED data sheet.

Dimensions in mm [inches]

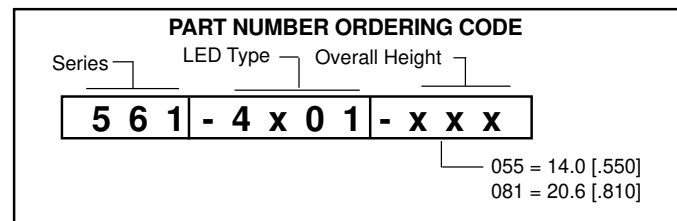

Typical Operating Characteristics (T_A=25°C)

See LED data sheet for additional information

Part Number	Color	Peak Wavelength nm	I _v mcd	V _F Volts	Test Current (mA)	Viewing Angle 2θ _{1/2}	LED Data sheet	Page #
561-4101-xxx	Red	635	5	1.9	20	100°	521-9264	5-17
561-4201-xxx	Green	565	2.5	2.3	20	100°	521-9266	5-17
561-4301-xxx	Yellow	583	5	2.1	20	100°	521-9265	5-17