



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



5640 Series T-1 3/4 Right Angle 4 Wide LED Assembly

Description and Features

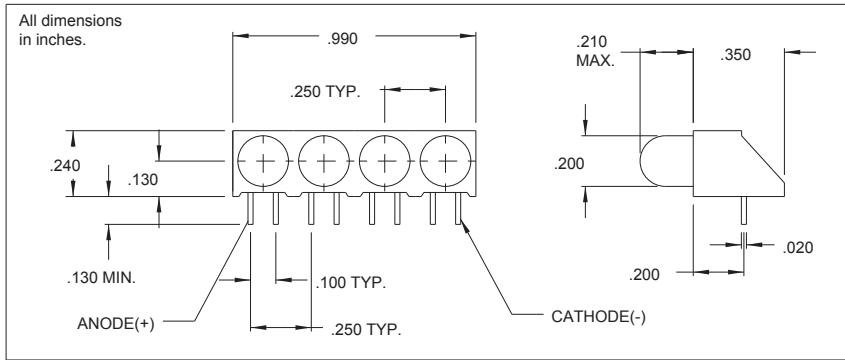

Features

- Quad assembly with 4 LEDs permits easy installation-assures matched height and center to center spacing, reduces assembly time and costs .
- Super Brite LEDs
- High contrast ratio.
- Low current - only 2mA
- Built-in resistor chips - operates off 5 volt or 12 volt supply without external resistor.
- Standoffs prevent flux entrapment.
- RoHS Compliant

Housing: Black Nylon, UL94V-O

Refer to "Mounting Hole Pattern 4.pdf"

The user who may have a requirement calling for various color / electrical specifications , a part number can be determined by referring to the chart shown below.

Model No. is as follows: 5640H _____ ; _____ ; _____ ; _____
Pos. 1 Pos. 2 Pos. 3 Pos. 4

When specifying all 4 LEDs of the same type -

Example: 4 each 5 volt red LEDs, the part number is 5640H1-5V

When specifying a variety of colors -

Example: Position 1 is green, position 2 is red, position 3 is yellow, position 4 is amber. All standard voltage.

The part number is 5640H5;1;7;3.

Alternate LEDs are also available in this package as a standard variation.

Electro-Optical Characteristics and Ratings

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min.(V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
1	Red	6.3	10	35.0	2.0	3.0	5.0	650
3	Amber	10.0	10	35.0	2.0	3.0	5.0	608
5	Green	10.0	10	30.0	2.2	3.0	5.0	563
7	Yellow	6.3	10	35.0	2.1	3.0	5.0	585
1LC	Red	2.3	2.0	7.0	1.8	2.7	5.0	635
5LC	Green	2.3	2.0	7.0	1.8	2.2	5.0	565
7LC	Yellow	2.1	2.0	7.0	1.9	2.7	5.0	583
1-5V	Red	8	10	15.0	5.0	7.5	5.0	635
3-5V	Amber	8	10	15.0	5.0	7.5	5.0	583
5-5V	Green	8	12	15.0	5.0	7.5	5.0	565
1-12V	Red	8	12	20	12	15.0	-	635

	Red	Amber	Green	Yellow
LED	1	3	5	7