mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Pomona®

Model 5682 Extended Tip with .080" Pin Jack

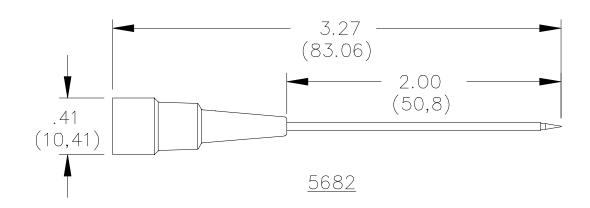

FEATURES:

- Fits directly over the test probe tip, allowing testing of hard-to-reach points.
- Tip is insulated to the point, providing protection from accidental shorting of adjacent components.

MATERIALS:

Insulation: Nylon Tip: Stainless Steel with Kynar Insulation

RATINGS:

Operating Temperature: +50°C. (+122°F.) Max. Operating Voltage: 300 VRMS/DC Operating Current: 3 Amperes Max.

ORDERING INFORMATION: Model 5682-*

* = Color, -0 Black, -2 Red

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (.51 mm), $.xxx = \pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 SY/EH/LS Sales: 909-469-2900 Fax: 909-629-3317 Technical Assistance: 800-241-2060