



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





The IP-50 provides easy and direct connection to products using networks and the Internet.

The IP-50 come with a standard Ethernet connection, RS-232 interface and on-board fully programmable and customizable web server. It can be used to control and monitor any RS-232 device remotely.

Users can design and setup their own user interface and functionality or access the expanding portfolio of standard product packages from www.digitalview.com/ip-50 website.

Applications include:

- ✓ Digital Signage installations
- ✓ Industrial systems monitoring and control
- ✓ Environmental monitoring
- ✓ Control and monitoring of Digital View products

SPECIFICATION

Network Interface
 Ethernet 10BaseT
 RJ-45 connector x 1
 Supported protocols: IP, TCP, DHCP


RS-232 Interface
 DB9-Female connector x 1
 Serial baud rate: 2400
 Data bits: 8
 Parity : none
 Stop bits: 1
 RS-232: TxD, RxD

Power
 Power input : 7.5V DC
 Power consumption : 200mA @7.5V

Environmental
 Operating temperature : 0°C to 50°C
 Relative humidity : 5%-95% relative humidity
 (Non-condensing)

Dimension
 Dimension (W x D x H) : 86mm x 69mm x 24.5mm

Weight
 Weight (net) : 130g

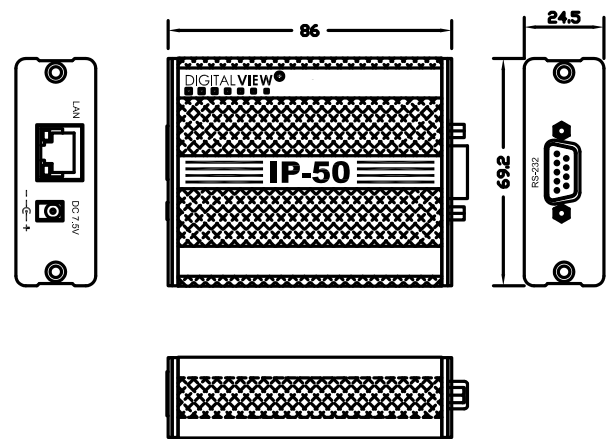

Brand names belong to their respective owners. Specifications subject to change without notice. August 2007

ASIA
USA
EUROPE

Digital View Ltd.
 19th floor Tai Tung Building
 8 Fleming Road
 Wanchai, Hong Kong

Tel: (852) 2861 3615
 Fax: (852) 2520 2987
 Email: sales@digitalview.com

Digital View Inc.
 18440 Technology Drive
 Building 130
 Morgan Hill, CA 95037
 USA

Tel: (1) 408-782-7773
 Fax: (1) 408-782-7883
 Email: sales@digitalview.com

Digital View Ltd.
 6 Marylebone Passage,
 London, W1W 8EX,
 UK

Tel: +44 20-7631-2150
 Fax: +44 20-7631-2156
 Email: sales@digitalview.com

Please visit our web site for more information: www.digitalview.com

