

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










Model 5953A Adjustable Tip Test Probe Set

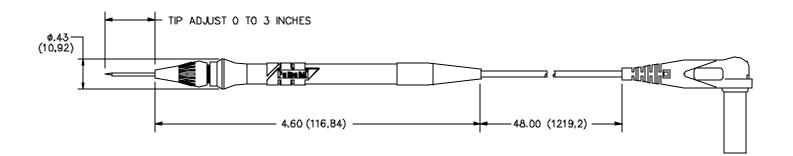

FEATURES:

- Slim retractable probe is fully insulated to within 1/8" of tip.
- Needle point tip adjusts to desired length from 0 to 3" (0 to 76mm)
- Stainless steel needle sharp point easily pierces varnish and thin insulation.
- Tip can be re-pointed if necessary.
- Shrouded banana plug is designed to fit most popular digital multimeter jacks.
- Banana plug molded directly to the wire for robust pull strength.
- Banana plug spring is nickel plated Beryllium Copper for long insertion life.
- 4-foot test lead wire is silicone insulated for high temperature resistance. Also remains flexible low temperature

MATERIALS:

Probe: Polypropylene and PVC, black and red

Tip: Stainless steel

Wire: 20 AWG, Silicone insulation

RATINGS:

UL-3111, EN61010-2-031, IEC 1010-2-031, Cat II 600V

Operating Voltage: 600 Max

Current: 3 Amperes

ORDERING INFORMATION: Model 5953A

Includes a set of one black and one red test lead

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

7/3/02 SY/EH/LS
Last saved by Laura Goldberg

C:\Laura Goldberg\FlukeDataSheet\d5953A_1_02.doc

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 Pomona*ACCESS* **90811** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

at