



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Surface Mount LED 0805 Type Package High Intensity LEDs



597-3xxx-4xx
597-5x11-4xx
597-5202-4xx

1

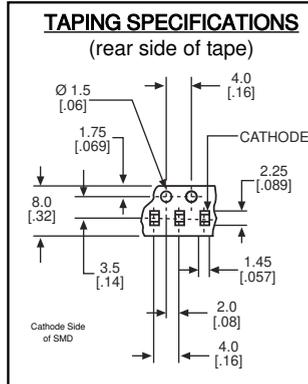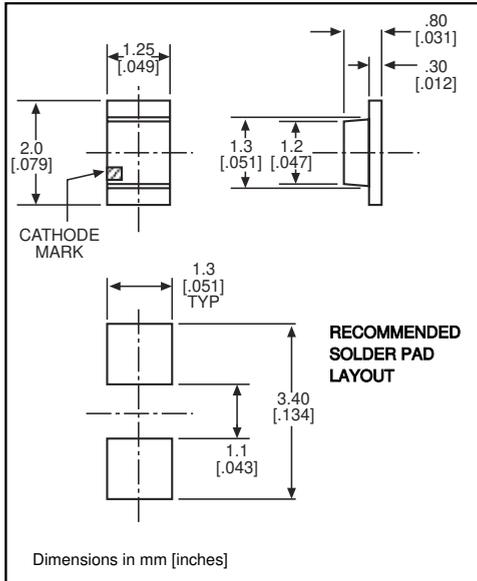

***ORDERING INFORMATION**

597-3xxx-4xx

packaging option →

02	20 pieces on tape
07	7" reel, 4000 pcs/reel

PART NO.*	COLOR
597-3003-4xx	AllnGaP Red
597-3212-4xx	Orange
597-3222-4xx	Yellow
597-5111-4xx	Red
597-5202-4xx	Orange
597-5311-4xx	Green
597-5411-4xx	Yellow

Features

- Very bright light output
- Highly efficient AllnGaP die
- Compatible with automatic placement equipment
- Compatible with infrared reflow processes
- Packaged on 8mm tape, 7" reels (meets EIA-481-1 standard)
- Compatible with Dialight's Optopipe™ Series light pipes

ABSOLUTE MAXIMUM RATINGS (T _A =25°C)	AllnGaP Red	Orange	Yellow	Red	Orange	Green	Yellow
	-3003	-3212	-3222	-5111	-5202	-5311	-5411
Power Dissipation (mW)	81	81	81	57.5	70	70	70
Forward Current (mA)	30	30	30	25	25	25	25
Derating (mA/°C) From 25°C	.43	.43	.43	.36	.36	.36	.36
Peak Current (mA) <i>Pulse width = 1 μs</i>	100	100	100	60	60	60	60
Operating Temperature (°C)	-40/+85	-40/+85	-40/+85	-30/+85	-30/+85	-30/+85	-30/+85
Storage Temperature (°C)	-40/+100	-40/+100	-40/+100	-40/+100	-40/+100	-40/+100	-40/+100
Soldering Profile	280°C peak 3 seconds			240°C peak 5 seconds			

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS (T _A =25°C)		AllnGaP Red	Orange	Yellow	Red	Orange	Green	Yellow
		-3003	-3212	-3222	-5111	-5202	-5311	-5411
Luminous Intensity (mcd)	Min.	16	16	16	7	2.2	3.8	7
	Typical	50	65	65	11.7	3.7	6.4	11.7
Peak Wavelength (nm)	Typical	630	609	594	660	605	560	570
	λ Peak							
Viewing Angle (2θ ^{1/2})	Typical	156°	156°	156°	140°	140°	140°	140°
Forward Voltage (V)	Typical	1.9	1.9	1.9	1.7	2.2	2.1	2.1
	Max.	2.4	2.4	2.4	2.3	2.8	2.8	2.8
Reverse Current (μA)	Max	100	100	100	100	100	100	100
	(V _R = 5V)							

θ_{1/2} is the off axis angle at which the luminous intensity is half the axial luminous intensity