

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China











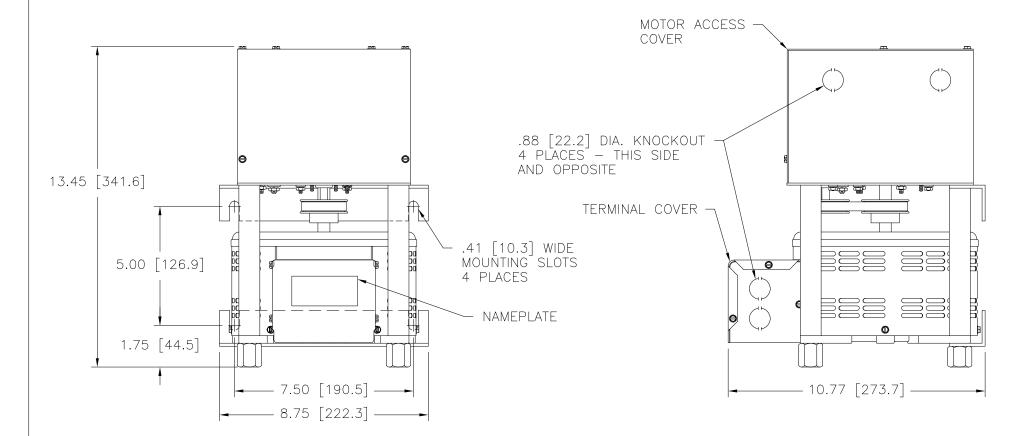

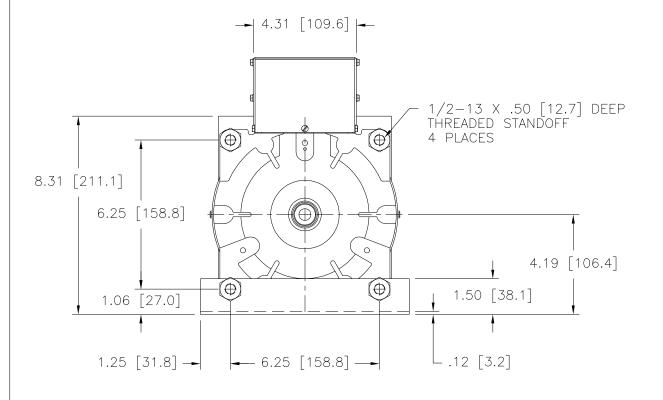




MOTOR CIRCUIT

120V, 50/60 HZ

\* ROTATION AS VIEWED
FROM MOTOR END

MOTOR SPEED: SEE CHART

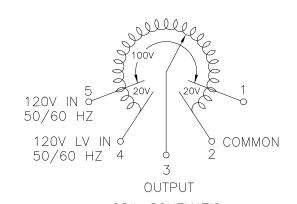

COIL SCHEMATIC

AS VIEWED FROM BASE END

FUSE RECOMMENDED BUT

NOT SUPPLIED

+ MOTOR DRIVEN UNITS USE TERMINAL CONNECTIONS FOR CCW INCREASING VOLTAGE, AS VIEWED FROM THE BASE END.

SPEED (SECONDS)	MODEL NUMBER
5	5M2510CT
15	15M2510CT
30	30M2510CT
60	60M2510CT

									60			60M2510CT	
	SPECIFICATIONS												
	INPUT		OUTPUT				SH	AFT	TERMINAL CONNECTIONS				
WIRING SINGLE PHASE	VOLTS	HERTZ 50/60	VOLTS 0-120	CONS CURI LO		CONSTANT ROTA- IMPEDANCE TO LOAD INCRE		ATION O	FOR INCREASING VOLTAGE AS VIEWED FROM BASE END +				
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	VOL-	VOLTAGE		PUT	JUMPER	
				0.5	7.00	7.0	7.0	С	CW 2		-4		4-3
				25	3.00	30	3.6	CC	CW 2-		-4		2-3
			0-140	25	3.50			С	CW 1 -		-4		4-3
								CC	CW	2-5			2-3
UNLESS OTHERWISE SPECIFIED. TOLERANCE IS ± DECIMALS HOLES ANGLES DRAFT  .XX ±05161 .06 ±0002 .01 1° 1-1/2° IN [mm]  .XXX .005			SPEC. CONTROL			DRAWING				SV			
MATERIAL : ALL DIMENSIONS APPLY AFTER PLATING				VARIABLE TRANSFORMER MODEL: M2510CT  MODEL: M2510CT						F AMERICA COMPANY			
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves						date 1/4/200		FIRST USED ON		OT DWG.	CUSTOMER APPROVAL		DATE
all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.					DATE	WEIGHT AI	PPROX. LBS	CODE IDENT. NO. 83008		DWG. SIZE	DWG. NO.	F0C1	
The foregoing does not apply to vendor proprietary parts.				ENGINEER		DATE	SCALE	1/2 SHEET 1		of 1	D	031-526	