

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








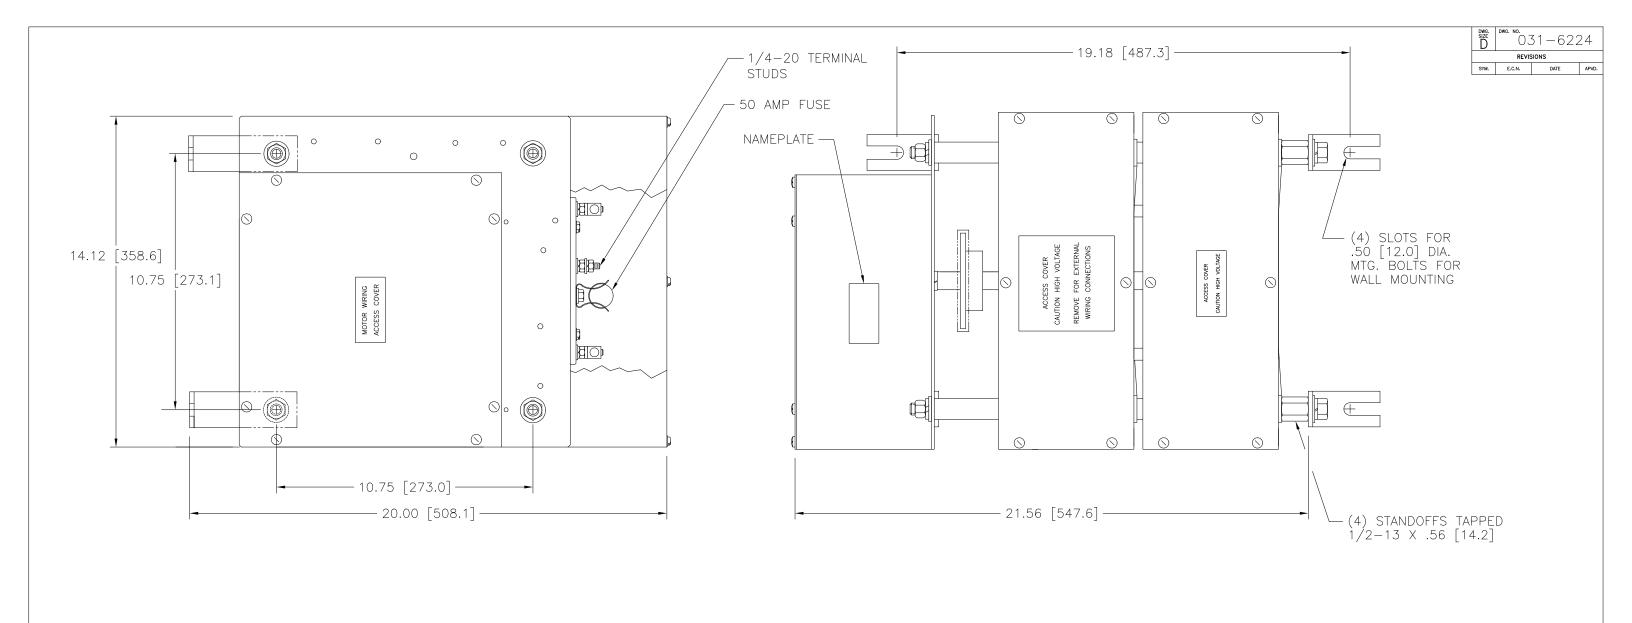

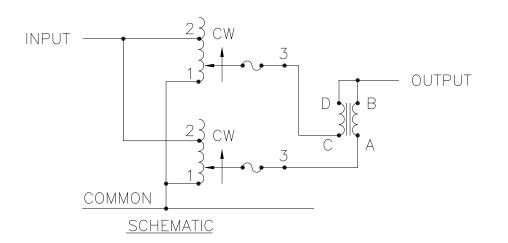



*ROTATION AS VIEWED FROM MOTOR END SPEED: SEE CHART

MOTOR CIRCUIT

SPEED (SECONDS)	MODEL NUMBER							
5	5M5011CT-2P							
15	15M5011CT-2P							
30	30M5011CT-2P							
60	60M5011CT-2P							

| WEIGHT APPROX. | CODE IDENT. NO. | DWG. | DWG. NO. | SIZE | | STALE | .5=1 | SHEET 1 OF 1 | D | | O 3 1 -6224

							6	60M5011CT-2P			
SPECIFICATIONS											
	INPUT		OUTPUT		SHAFT	TERMINAL CONNECTIONS					
WIRING	VOLTS HERTZ	HERTZ	VOLTS	MAX. AMPS	MAX. KVA	ROTATION TO INCREASE VOLTAGE	VOLTAGE AS VIEWED				
							INPUT	JUMPER	OUTPUT		
SINGLE PHASE PARALLEL	120	50/60	0-140	100	14.0	CW	1-2		1-B		
UNLESS OTHERWISE SPECIFIED. TOLERANCE IS ± DECIMALS HOLES ANGLES DRAFT .XX .010 .08 .002 1° 1-1/2° IN [mm] .XXX .005			SPEC. CONTROL DRAWING VARIABLE MOTORIZED XEMR								
MATERIAL : ALL DIMENSIONS APPLY AFTER PLATING			VARIABL TYP	ZED XFMR. DENERGY PRODUCTS CO							
The information and design disclosed herein was originated by		DRAWN BY	DATE FIRST USE	ED ON DO N		MER APPROVAL	DATE				