

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







5mm (T1 ¾) Package Discrete LED RED



5RX-X


- ♦ Industry Standard 5mm (T1 ¾) Package
- **♦** RoHS Compliant
- Water Clear (C), Diffused (D), and Tinted (T) Lenses
- Available in Flange (F) and Standard (Blank) Lead Frame styles
- Ideal for Status Indication and Display



Bivar 5mm T1 ¾ Package LED may be used in almost any application. Bivar offers water clear LED lens for maximum light output, diffused LED lens for uniform light output, and tinted lens to identify the color of the LED. The Flange LED is ideal for Panel Mount Clip & Ring assemblies and the Standard Lead frame LED is ideal for vertical spacer assemblies without lead bends.

Part Number	Material	Emitted Color	Peak. Wavelength λp(nm) TYP.	Lens Appearance	Viewing Angle	
5RC-F	O-F GaP/GaP D	RED		Water Clear	35°	
5RD-F			700nm	Red Diffused	40°	
5RT-F				Red Tinted	35°	
5RC			70011111	Water Clear	35°	
5RD				Red Diffused	45°	
5RT				Red Tinted	35°	

Part Number Designation










5mm (T1 ¾) Package Discrete LED



Outline Dimensions

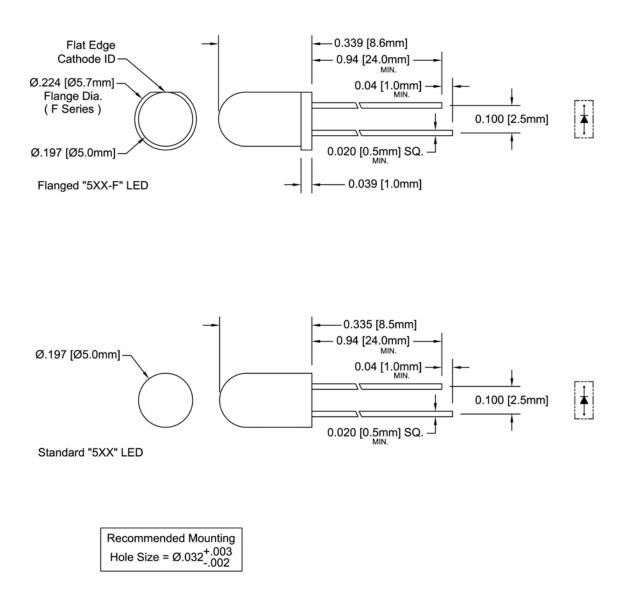

Outline Drawings Notes:

1. All dimensions are in inches [millimeters].

2. Standard tolerance: ±0.010" unless otherwise noted.

3. Tolerance of overall epoxy outline: ±0.020" unless otherwise noted.

4. Epoxy meniscus may extend to 0.060" max.

5mm (T1 ¾) Package Discrete LED RED



Absolute Maximum Ratings

 $T_A = 25^{\circ}C$ unless otherwise noted

Power Dissipation	45 mW	
Forward Current (DC)	20 mA	
Peak Forward Current ¹	80 mA	
Reverse Voltage	5 V	
Operating Temperature Range	-25 ~ +85°C	
Storage Temperature Range	-30 ~ +100°C	
Lead Soldering Temperature (3 mm from the base of the epoxy bulb) 2	260°C	

Notes: 1. 10% Duty Cycle, Pulse Width ≤ 0.1 msec.

Electrical / Optical Characteristics

 $T_A = 25$ °C & $I_F = 20$ mA unless otherwise noted

Part Number	Forward Voltage (V) ¹		Recommend Forward Current (mA)		Reverse Current (µA)	Dominant Wavelength (nm) ²		Luminous Intensity Iv (mcd)			Viewing Angle 2 Θ ½ (deg)			
	MIN	TYP	MAX	MIN	TYP	MAX	MAX	MIN	TYP	MAX	MIN	TYP	MAX	TYP
5RC-F								1	1	/	1	2	/	35
5RD-F	/	2.1	2.8	/	20	1	100	1	1	/	/	1.5	/	40
5RT-F								/	1	/	1	2	/	35
5RC								1	1	/	1	2	/	35
5RD	/	2.1	2.8	/	20	/	100	/	1	/	1	2	/	45
5RT								1	1	1	1	2	/	35

Notes: 1. Tolerance of forward voltage: ±0.05V. 2. Tolerance of dominant wavelength: ±1.0nm.

^{2.} Solder time less than 5 seconds at temperature extreme.

5mm (T1 ¾) Package Discrete LED RED



Typical Electrical / Optical Characteristics

T_A = 25°C unless otherwise noted

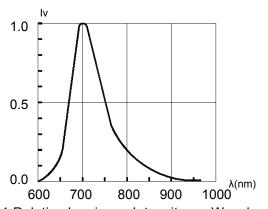


Fig. 1 Relative Luminous Intensity vs. Wavelength @ 20mA

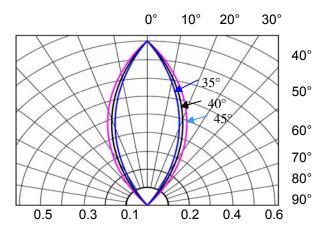


Fig. 2 Directivity Radiation Diagram

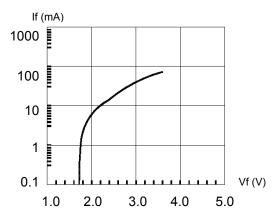


Fig. 3 Forward Current vs. Forward Voltage

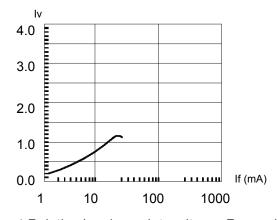


Fig. 4 Relative Luminous Intensity vs. Forward Current Normalize @ 20 mA

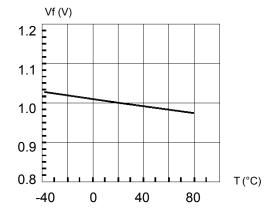


Fig. 5 Forward Voltage vs. Temperature


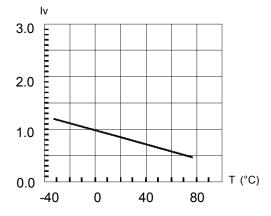


Fig. 6 Relative Luminous Intensity vs. Temperature

5mm (T1 ¾) Package Discrete LED RED




Recommended Soldering Conditions

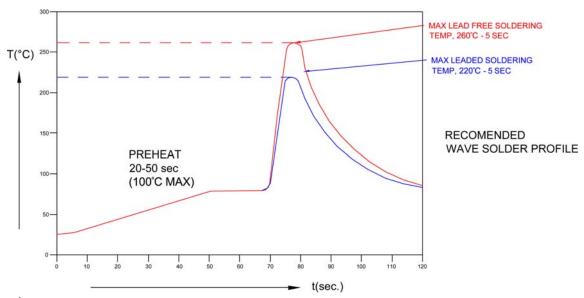

Recommended Lead Free Wave Soldering Profile					
Preheat Temperature: 100°C Max.	Peak Temperature: 260°C Max.				
Preheat Time: 20 ~ 50 Seconds	Solder Time Above 217°C: 5 Seconds Max.				
Note: Turn off top heater at preheat to prevent the lamp body directly exposed to the heat source.					

Packaging and Labeling Plan

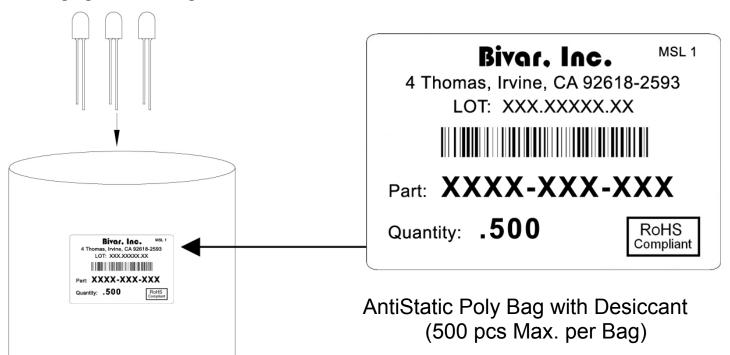

Bivar reserves the right to make changes at any time without notice