

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







#### **CUSTOMER DRAWING**

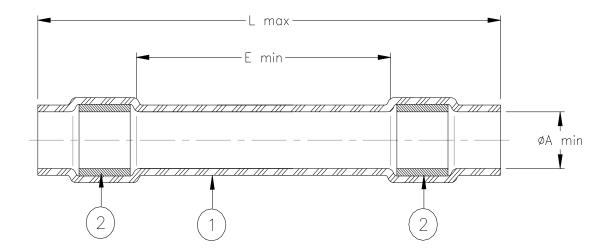

Product Revision		Pr	oduct Dimensio	Cable Dimensions		
Product Name		L	Е	øΑ	øD	øD
		max	min	min	min	max
D-436-08	L	34.7	7.7	3.8	0.65	3.8
		(1.365)	(0.305)	(0.150)	(0.250)	(0.150)
D-436-09	L	34.8	7.7	6.1	1.25	6.1
		(1.370)	(0.305)	(0.240)	(0.050)	(0.240)
D-436-10	С	35	7.7	7.9	2.55	7.9
		(1.380)	(0.305)	(0.310)	(0.100)	(0.310)


### **MATERIALS**

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. SEALING RING: Immersion resistant thermoplastic. Color:gray.

## **APPLICATION**

- 1. These parts are designed to provide an immersion resistant seal on 1 to 1 splices made of wires having an insulation rated for at least +135°C.
- 2. Temperature range: -55°C to +150°C. Parts may be installed by convection heating.

#### Cable dimension:



\* A trademark of Raychem Corporation..

<b>=</b> 7	<b>E</b> TE C	onnectivity	RAYO DEV		SEALING SLEEVE					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.					DOCUMENT NO.: D-436-08/-10					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any tin should evaluate the suitability of the product for their applic								
DRAWN BY: T.NGUYEN		DATE: 02/06/20	ATE: REV 02/06/2013		ISION: B	SCALE: None		SIZE:	SHEET: 1 of 1	