



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Metalohm Series

Cold Rolled Steel Encased Wirewound Heatsinkable Radial Terminal

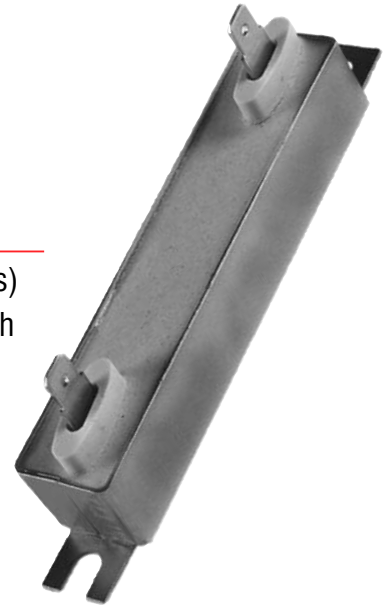

FEATURES

- Flameproof and inorganic
- Higher power rating due to heat sink capacity
- All welded construction
- Nonhygroscopic
- High surge construction

OPTIONS

- Noninductive versions (Aryton-Perry windings)
- Terminal sleeves to increase dielectric strength and maximize creepage distance
- Variety of terminal choices
- Potted or soldered wire terminals including quick connect, ring, spade terminals
- Tapped models

SERIES SPECIFICATIONS

Style	Watts w/o heat sink	Watts w/ heat sink*	Ohmic range**
20/45M	20	45	0.05-6K
40/70M	40	70	1.0-25K
HV40-70M	40	70	1.0-25K
50/100M	50	100	1.5-47.5K
60/115M	60	115	2.5-81K
85/150M	85	150	4.5-100K

*Based on a 12"x12"x0.125" aluminum heat sink, using a thermal compound, in a 25°C ambient

**Standard winding ranges only listed, other values available; contact Ohmite.

CHARACTERISTICS

Wattage	Based on a 275°C "U" characteristic derating curve
Temperature coefficient	<ul style="list-style-type: none"> ≥18 ohm: 0 ±90ppm/°C 8 < 18 ohm: 0 ±50ppm/°C <8 ohm: 0 ±180ppm/°C (TC for some watt/ohm combinations may be lower)
Dielectric strength	Terminal to case, depends on terminal style (1500V min.)
Creepage	<ul style="list-style-type: none"> term. style 277: 1.2" term. style 278: 0.4" term. style 276: 0.7" term. styles 211/252/279: 0.15"
Termination Wires	<ul style="list-style-type: none"> • Stranded, available in any insulation rated 125°C or higher (may require term. style 297). • 12" standard length for term. 297 & 298 (custom lengths available) • Can be potted or pre-soldered to terminal styles 211 or 252 • Quick connect (fully or partially insulated), ring or spade terminations available
Dielectric Sleeves	<ul style="list-style-type: none"> • Steatite construction • Style 276 meets UL/NEMA 2500V RMS for one minute requirement • Available as terminal styles 276, 277, 278, 297

Dielectric Strength/Terminal Availability

Terminal Type	211	252, 279	276	278	277	297	298
Style	Dielectric Strength						
20/45M	1500	N/A	N/A	N/A	N/A	2500V	2500V
40/70M	1500	1500	2500	2500	N/A	2500V	2500V
HV40/70M	N/A	N/A	N/A	N/A	4250	N/A	N/A
50/100M	1500	1500	2500	2500	N/A	2500V	2500V
60/115M	1500	1500	2500	2500	N/A	2500V	2500V
85/150M	1500	1500	2500	2500	N/A	2500V	2500V


(continued)

Metalohm Series

Cold Rolled Steel Encased Wirewound Heatsinkable Radial Terminal

DIMENSIONS

(in.)

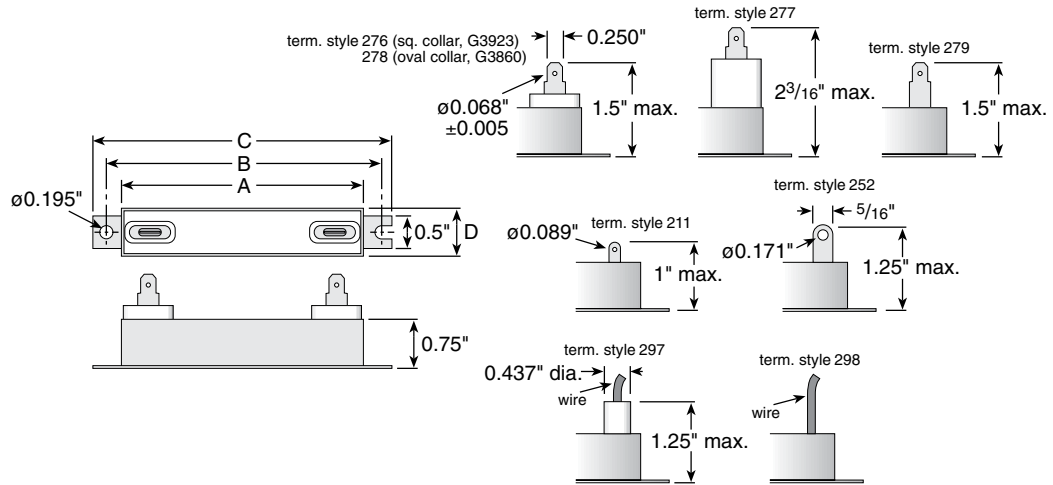

Style	A	B	C	D
20/45M	1	1 ⁷ / ₁₆	1 ⁷ / ₈	³ / ₄
40/70M	2 ⁹ / ₁₆	3	3 ⁷ / ₁₆	³ / ₄
HV40-70M	2 ⁹ / ₁₆	3	3 ⁷ / ₁₆	⁷ / ₈
50/100M	3 ¹¹ / ₁₆	4 ¹ / ₈	4 ⁹ / ₁₆	³ / ₄
60/115M	5 ⁹ / ₁₆	6	6 ⁷ / ₁₆	³ / ₄
85/150M	7 ¹ / ₂	8	8 ¹ / ₂	³ / ₄

ORDERING INFORMATION

Not all terminal types available for all Metalohm sizes

