



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



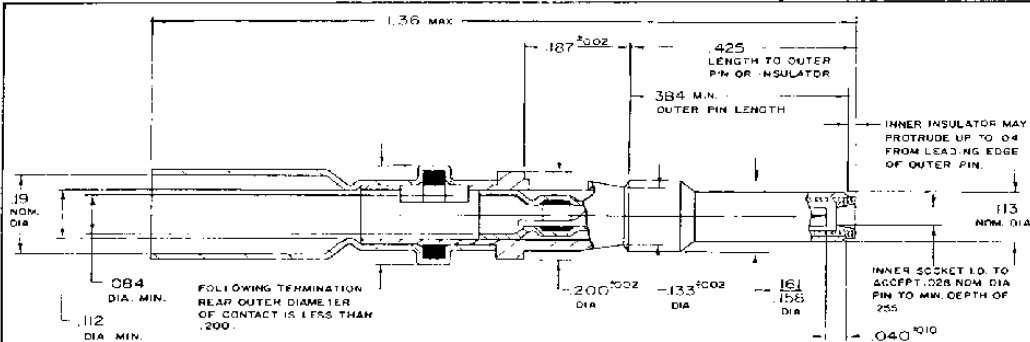

REV.	DATE	BY	APPROVED
F	REVISED PER E.C.N. T-6579	12/19/88	M-HGGY
G	REVISED PER E.C.N. T-22013	12/19/88	M-HGGY

NOTES:

1. THIS CONTACT IS DESIGNED FOR USE IN MIL-C-26482 SERIES I CONNECTORS AND FITS IN STANDARD SIZE 12 CAVITIES.
2. THIS CONTACT IS DESIGNED TO ACCOMMODATE COAXIAL CABLE:

RG CABLE NO.	RAYCHEM CABLE NO.
RG 174 /U	5024A IXIX
RG-179 A/U	5026A IXIX
RG-316	5028A IXIX
	5030A IXIX
	7528A IXIX
	7530A IXIX
	9532A IXIX

3. SEE ES 61161 FOR TERMINATION PROCEDURE.
4. MATING CONTACT (FOR SIMILAR CABLES) D-602-16

CONTACT CHARACTERISTICS:

MATERIALS:

OUTER BODY: BRASS, UNS ALLOY NO. C36000 TEMPER H02, SPEC. ASTM B16
PLATING: GOLD PER ASTM B 488 (MIL-G-45204) OVER NICKEL PER QQ-N-290 AND COPPER FLASH.

INNER CONTACT: BERYLLIUM COPPER, UNS ALLOY NO. C17300 TEMPER TH04, SPEC ASTM B196, OR UNS ALLOY NO. C17200, TEMPER TH04, SPEC. ASTM B194.

PLATING: GOLD PER ASTM B 488 (MIL-G-45204) OVER NICKEL PER QQ-N-290 AND COPPER FLASH.

DIELECTRIC: FLUOROPOLYMER.

SOLDER: SN63 RMAP IN ACCORDANCE WITH ANSIIJ-STD-006.

CABLE SUPPORT: POLYVINYLIDENE HEAT SHRINKABLE TUBING.

PERFORMANCE:

TEMPERATURE RATING: 125°C MAXIMUM.
CURRENT RATING: 3 AMPS
VOLTAGE RATING: DIELECTRIC WITHSTANDING VOLTAGE 900 VOLTS RMS, MAXIMUM.
CONTACT RESISTANCE: 5 MILLIOHMS MAXIMUM.
INSULATION RESISTANCE: 5 GIGAOHM MINIMUM.

CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE:	DRAWN	WIRED	TITLE
.XXX ± ()	CHECKED		COAXIAL CONTACT # 12 PIN
.XX ± ()	APPROVED		
.X ± ()	APPROVED		
∆ ± ()	APPROVED		
DO NOT SCALE THIS DRAWING	CAD FILE	T22013.TIF	SIZE A CODE IDENT NO. 06090 DWG. NO. D-602-17 SHEET 1 OF 1