



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER DRAWING

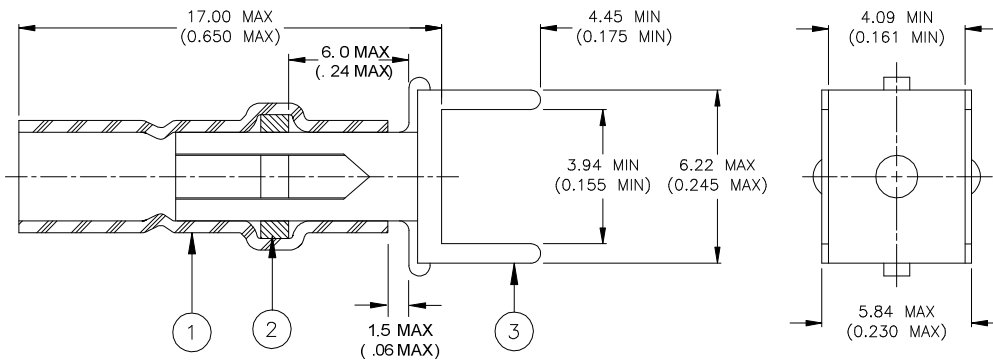


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn63 per ANSI-J-STD-006.
 FLUX: TYPE ROL1 per ANSI-J-STD-004.
3. TERMINATOR BODY: Copper alloy, solder-plated.

APPLICATION


1. Terminator is designed to be used on P.C. boards with the following hole pattern:




2. This terminator is designed for use with the cables listed in table below. Other applications should be submitted to Raychem for evaluation.

Raychem Cable No.	RG Cable No.
5028A1317, 5026A1317, 7028A1317, 7528A1317,	RG-178, -179, -187,-188,-316

3. Terminators may be positioned such that grounding legs of adjacent terminators share the same holes in the PC board. When terminators are positioned in this manner a 1.40 (0.055) minimum hole diameter is required.

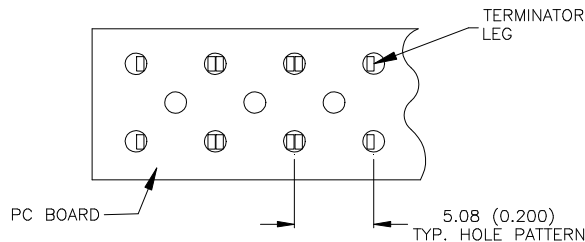

4. Performance:
 - a. Temperature rating 125°C.
 - b. Current rating 3 amps max.
5. For termination procedure, see ES 61139.

		300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: <h3 style="text-align: center;">PCB TERMINATOR, COAXIAL STRAIGHT, 5.08 (0.200) GRID</h3>					
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			Raychem Devices		DOCUMENT NO.: <h3 style="text-align: center;">D-607-09</h3>				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: <h3 style="text-align: center;">B1</h3>		DATE: <h3 style="text-align: center;">11May 11, 2011</h3>	
PREPARED BY: <h3 style="text-align: center;">UNGUYEN</h3>		CAGE CODE: <h3 style="text-align: center;">06090</h3>		ECO NUMBER: <h3 style="text-align: center;">ECO-11-005139</h3>		SCALE: <h3 style="text-align: center;">NTS</h3>		SIZE: SHEET: <h3 style="text-align: center;">A 1 of 1</h3>	