

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










6010M, 6011M, 6012M, 6013M and 6091M Series **Oil-Tight Non-Relampable Neon-LED Indicator Lights**

Description and Features

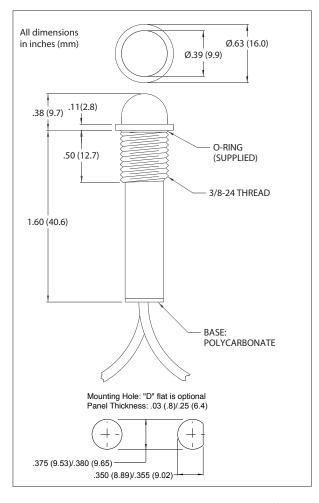

Solid-state indicator lights complete with built-in current-limiting resistor and rectifier diode.

Meets NEMA Class 13

Mounting: Ø.380(9.65) hole. Supplied with internal tooth lock washer and hex nut.

Wire Leads: Neon Models: No. 18 AWG (105°C) 4.4 (111.8)/4.8 (121.9) long, stripped .43 (10.9)/.57 (14.5) LED Models: No. 22 AWG (105°C) 4.4 (111.8)/4.8 (121.9) long, stripped .43 (10.9)/.57 (14.5)

LED Solid State Indicator

Incorporates

Model No.

Lens: Polycarbonate

Bezel: Polished stainless steel.

Gaskets: Buna-N

Housing: Black Nylon

Model No.

	Neon Indicator			
Lens Color	Model No.	Model No.		
	(105-125VAC)	(208-250VAC)		
Red	6010M1	6011M1		
Amber	6010M3	6011M3		
Green	6012M5*	6013M5*		
Lamp used	C2A+Resistor	C2A+Resistor		
Lamp Color	Black	1 Black/1 Red		

	(105-125VAC)	(208-250VAC)		for 12V	for 24V	LED**
ed	6010M1	6011M1	Red	6091M1-12V	6091M1-24V	4304H1
mber	6010M3	6011M3	Green	6091M5-12V	6091M5-24V	4304H5
ireen	6012M5*	6013M5*	Yellow	6091M7-12V	6091M7-24V	4304H7
amp used	C2A+Resistor	C2A+Resistor	Internal Resistor	390	1000	_
amp Color	Black	1 Black/1 Red	(ohms)	390	1000	

Lens Color

^{*} Incorporates G2B lamp and resistor. Underwriters Laboratories (UL) File No. E20356

^{**}Note: Also incorporates IN4004 (400 P.I.V.) rectifier diode. Red lead positive.