

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








- 1, MOUNTING HOLE SIZE: Ø 7.3mm (.287)
- 2, MAXIMUM PANEL THICKNESS: 6mm (.236)
- 3, MATERIALS:

- 3.1, METAL HOUSING: BRASS, BRIGHT CHROME PLATED.
 3.2, MOUNTING HEX NUT: BRASS, NICKEL PLATED.
 3.3, SPLIT LOCK WASHER: STEEL, NICKEL PLATED.
 3.4, HEADER/INSULATOR: POLYCARBONATE, COLOR: BLACK.
- 4, SOLDERABILITY: PER ANSI/IPC-S-805, METHOD A.

YELLOW	GREEN	RED	נטרט ג	3	
587	560	630	ス p (nm)	PEAK WAVE	
15	15	15	LENGTH OPERATING IN IN VA TOP Teto	_	
g S	30	ge G	₹,	ABSO	LED
30 100 3	3 100	100	31	E E	웃
ω	ω	ω	€,<	41 XVM	RACI
ģ (ģ	ģ\ģ	ģ/ÿ	ପ୍ରଶ୍ଚ	₹	ERIS
÷);	÷65√-38 -100/-39	901+ 901+ 96- 96- 96-	Tetg (C)	ABSOLUTE MAXIMUM RATINGS	LED CHARACTERISTICS TABLE
1.98	1.98		STD		TABI
2.5	2.5	2.5	XX.S	ELEC	Э
10 91 25 10 80 3 1.2 1.6 10 80 10 00.1 3 00 05 05 05 05 05 05 05 05 05 05 05 05	1.98 2.5 10	1.90 2.5 10 50	[(mA)	ELECTRO-OPTICAL CHARACTERISTICS	
	50	50	XVM	LICVI	
ω	ω	E	(V) (V)	CHAR,	
1.2	Ē	3	BR16	CTER	
1.6	10	10	STD SZANTI	STICS	
10	20	20	STD MAX I (mA) MAX VG(V) MIN STD I, (mA)	•	

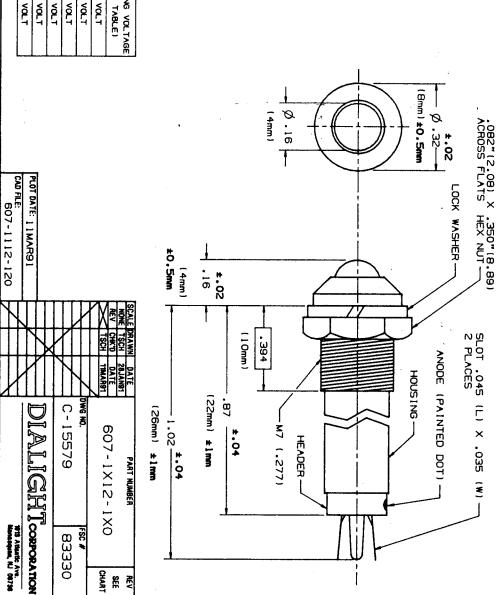

12 VOLT	YELLOW				607-1312-130
12 VOLT	GREEN				♦ -1212-130
12 VOLT	RED				-1112-130
6 VOLT	YELLOW				-1312-120
6 VOLT	GREEN				1212-120
6 VOLT	RED				607-1112-120
(SEE TABLE)	COLOR	APP	LTR DATE APP	LTR	ASSEMBLY NO.
OPERATING VOLTAGE	רפט	ž	REVISION	E.	DIALIGHT