imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






EXTRUSION PROFILE 60760



DATASHEET

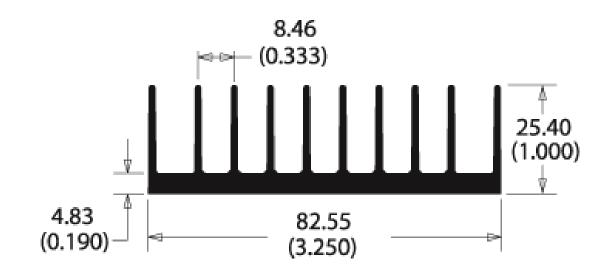

60760 PRODUCT DETAILS

Property	Details
Height	1.00 in (25.4 mm)
Width	3.25 in (82.55 mm)
Perimeter	22.50 in
Weight	1.3 lb per foot 1.93 kg per meter)
Material	6063-T5 Aluminum Extrusion Alloy

Aavid reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or applications. For additional information, please contact Aavid directly.

USA: 1.855.322.2843 EUROPE: 39.051.764002 ASIA: 86.21.6115.2000 x8122



Extrusion Profile 60760 www.aavid.com November 2016 A02







THERMAL DATA

Natural Convection: 3.11 based on 70 C temp rise above ambient.

Thermal resistance is calculated based on a single 1" (25.4mm) square heat source centered on the heat sink. If you have distributed loads, then you can expect 10% better performance in natural convection and 20% better performance in forced convection.

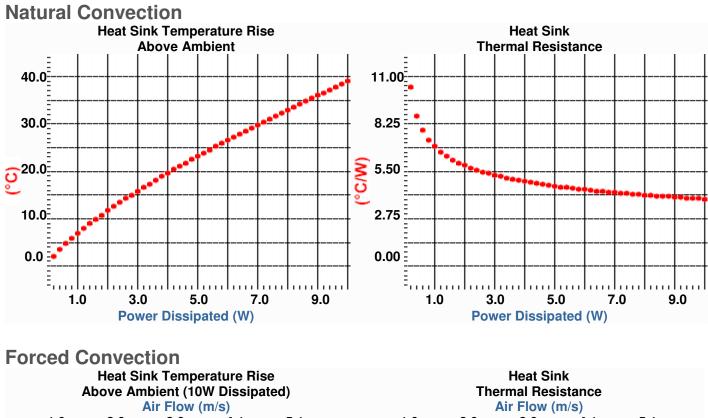

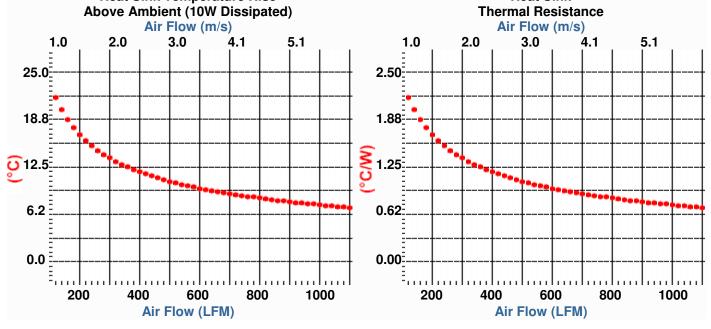

USA: 1.855.322.2843 EUROPE: 39.051.764002 ASIA: 86.21.6115.2000 x8122



Extrusion Profile 60760 www.aavid.com November 2016 A02