

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Technical Data Sheet - Draft		Rosenberger		
7-16	Adaptor Plug - Plug	60S101-SIMN1		

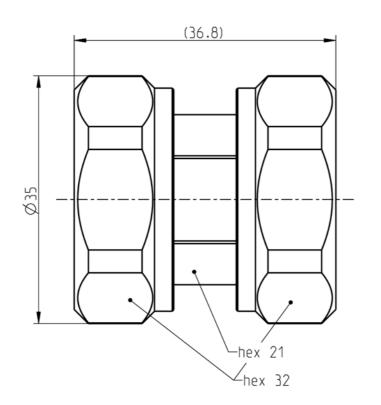



All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 61169-4, EN 122190, DIN 47223

Material and Plating Connector parts Center contact

Outer contact Dielectric Gasket

Material

Brass Brass PTFE Silicone

Plating

Silver, 3-6 µm Flash white bronze over silver(e.g. Optargen®)

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email: info@rosenberger.de Page

1/2

Technical Data Sheet - Draft Rosenberger

7-16 Adaptor Flug - Plug - Plug

Electrical Data

 $\begin{array}{ll} \text{Impedance} & 50 \ \Omega \\ \text{Frequency} & \text{DC to 7.5 GHz} \end{array}$

Return loss \geq 40 dB @ DC to 3 GHz \geq 35 dB @ 3 GHz to 4.5 GHz

≥ 30 dB @ 4.5 GHz to 7.5 GHz ≥ 25 dB @ 7.5 GHz to 8.3 GHz

Insertion loss $\leq 0.5 \text{ x } \sqrt{\text{f [GHz]}} \text{ dB}$

 $\begin{array}{ll} \mbox{Insulation resistance} & \geq 10 \mbox{ G}\Omega \\ \mbox{Center contact resistance} & \leq 0.4 \mbox{ m}\Omega \\ \mbox{Outer contact resistance} & \leq 1.5 \mbox{ m}\Omega \\ \mbox{Working voltage (at sea level)} & 500 \mbox{ V rms} \\ \mbox{Power handling (at 20 °C, sea level, VSWR 1.0)} & 1800 \mbox{ W @ } \end{array}$

el, VSWR 1.0) 1800 W @ 1 GHz 800 W @ 4 GHz

RF-leakage \geq 128 dB @ DC to 1 GHz Intermodulation (3rd order) \leq -128 dBm @ 2 x 20 W

Mechanical Data

 $\begin{array}{ll} \text{Mating cycles} & \geq 500 \\ \text{Coupling nut retention} & \geq 1000 \text{ N} \\ \text{Center contact captivation: axial} & \geq 200 \text{ N} \\ \end{array}$

 $\begin{array}{ll} \text{radial} & \geq 2 \text{ Ncm} \\ \text{Coupling torque (recommended)} & 25 \text{ to } 30 \text{ Nm} \\ \text{Proof torque} & \leq 35 \text{ Nm} \\ \end{array}$

Environmental Data

Temperature range -55 °C to +155 °C

Rapid change of temperature DIN EN 122190, Sub-clause 4.6.7 Corrosion resistance DIN EN 122190, Sub-clause 4.6.10 Vibration DIN EN 122190, Sub-clause 4.6.3

Climatic category DIN EN 122190, Sub-clause 4.6.5 (55/155/56)

Damp heat DIN EN 122190 , Sub-clause 4.6.6 Degree of protection (mated pair) IEC 60529, IP68 2.5 bar 1h

RoHS IEC 60529, IP68 2.5 bar 1n compliant

Weight

Weight 125 g/pc

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Benjamin Kaindl 12.03.12	J_Gramsamer	01.04.15	b00	15-0397	J_Krautenb.	01.04.15

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel.: +49 8684 18-0 Email: info@rosenberger.de Page 2 / 2