

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









**Micro Commercial Components** 

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939 60S05 thru **60S10** 

6 Amp Axial-Lead

**Glass Passivated** 

Rectifier

50 - 1000 Volts

## Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information) Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- High Surge Current Capability and Low Leakage
- Glass Passivated Chip
- Halogen free available upon request by adding suffix "-HF"

- Maximum Ratings
  Operating Junction Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C


MCC	Device	Maximum	Maximum	Maximum
Catalog	Marking	Reccurrent	RMS	DC
Number		Peak	Voltage	Blocking
		Reverse		Voltage
		Voltage		
60S05	60S05	50V	35V	50V
60S1	60S1	100V	70V	100V
60S2	60S2	200V	140V	200V
60S4	60S4	400V	280V	400V
60S6	60S6	600V	420V	600V
60S8	60S8	800V	560V	800V
60S10	60S10	1000V	700V	1000V

Bectrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	I <sub>F(AV)</sub>	6.0A	T <sub>A</sub> = 100°C
Peak Forward Surge	I <sub>FSM</sub>	200A	8.3ms, half sine
Current			
Maximum			
Instantaneous	$V_{F}$	1.0V	$I_{FM} = 6.0A;$
Forward Voltage			$T_J = 25^{\circ}C^*$
Maximum DC			
Reverse Current At	I <sub>R</sub>	5μΑ	T <sub>J</sub> = 25°C
Rated DC Blocking		100μA	T <sub>J</sub> = 100°C
Voltage		Ισομίτ	1, - 100 0
Typical Junction	CJ	150pF	Measured at
Capacitance	_		1.0MHz, V <sub>R</sub> =4.0V

Notes:1. High Temperature Solder Exemption Applied, see EU Directive Annex 7. 2.Pulse test: Pulse width 300 sec, Duty cycle 1%

# **DO-201AD**

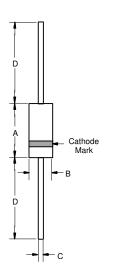


DIMENSIONS						
	INCHES		MM			
DIM	MIN	MAX	MIN	MAX	NOTE	
Α	.287	.374	7.30	9.50		
В	.189	.208	4.80	5.30		
С	.048	.052	1.20	1.30		
D	1.000		25.40			

## 60S05 thru 60S10



Figure 1 Typical Forward Characteristics

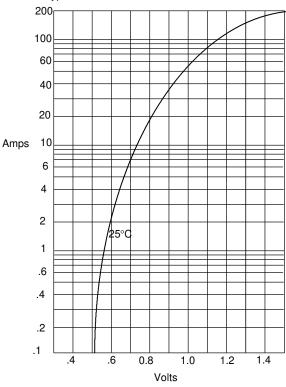


Instantaneous Forward Current - Amperesversus Instantaneous Forward Voltage - Volts

Figure 3 Maximum Non-Repetitive Forward Surge Current 300 250 200 150 Amps 100 50 0 20 60 80 100 4 6 8 10

Peak Forward Surge Current - Amperesversus Number Of Cycles At 60Hz - Cycles


Cycles

**Micro Commercial Components** 

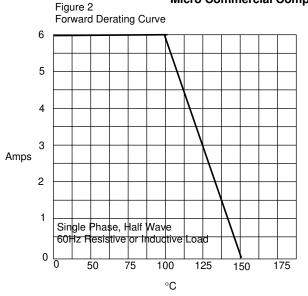

Average Forward Rectified Current - Amperes versus Ambient Temperature - °C

Figure 4 Typical Reverse Characteristics

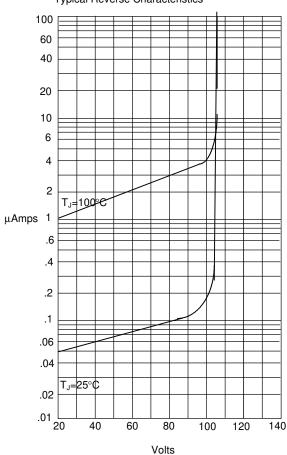

Instantaneous Reverse Leakage Current - MicroAmperesversus Percent Of Rated Peak Reverse Voltage - Volts



## Ordering Information:

Device	Packing	
Part Number-TP	Tape&Reel: 1.2Kpcs/Reel	
Part Number-AP	Ammo Packing: 1.2Kpcs/Ammo Box	
Part Number-BP	Bulk: 12Kpcs/Carton	

Note: Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

## \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.