



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# THERM-A-GAP™ HCS10,569,570,579 and 580

## Thermally Conductive Gap Filler Pads



### Description

THERM-A-GAP™ gap-filler sheets and pads offer excellent thermal properties and highest conformability at low clamping forces.

### Features / Benefits

- Ultra low deflection force
- High thermal conductivity
- High tack surface reduces contact resistance

- “A” version offers high strength acrylic PSA for permanent attachment
- UL recognized V-0 flammability
- RoHS compliant

All products are available on aluminum foil “A” or on “clean break” glass “G” fiber carrier. As with all previous Chomerics gap-fillers, the “A” versions have a high strength acrylic pressure sensitive adhesive (PSA) for permanent attachment to the cold surfaces.

THERM-A-GAP™ HCS10, 569, 570, 579 and 580 Thermally Conductive Pads							
Typical Properties		HCS10	569	570	579	580	Test Method
Physical	Color	Orange / Grey Carrier	Grey	Blue	Pink	Yellow	Visual
	Standard Carriers: G = Woven glass - no PSA A = Aluminum foil - with PSA Custom Carriers: PN = PEN film carrier KT = Thermally Enhanced Polyimide Carrier	A or G	A, G or PN	A or G	A, G, PN or KT	A or G	--
	Standard Thicknesses*, inch (mm)	0.010 - 0.200 (0.25 - 5.0)	0.010 - 0.200 (0.25 - 5.0)	0.020 - 0.200 (0.5 - 5.0)	0.010 - 0.200 (0.25 - 5.0)	0.020 - 0.200 (0.5 - 5.0)	ASTM D374
	Specific Gravity	2.0	2.2	2.2	2.9	2.9	ASTM D792
	Hardness, Shore 00	4	10	25	30	75	ASTM D2240
	Percent Deflection @ Various Pressures** (0.125 in thick sample)	% Deflected	% Deflected	% Deflected	% Deflected	% Deflected	ASTM C165 MOD (0.125 in “G” Type, 0.50 in dia. probe, 0.025 in/min rate)
		@ 5 psi (34 kPa)	26	20	10	22	7
	@ 10 psi (69 kPa)	36	30	15	33	10	
	@ 25 psi (172 kPa)	59	50	25	55	20	
	@ 50 psi (345 kPa)	73	65	35	68	30	
	Operating Temperature Range, °F (°C)	-67 to 392 (-55 to 200)	-67 to 392 (-55 to 200)	-67 to 392 (-55 to 200)	-67 to 392 (-55 to 200)	-67 to 392 (-55 to 200)	--
Thermal	Thermal Conductivity, W/m-K @ 25 psi	1	1.5	1.5	3	3	ASTM D5470
	Thermal Impedance, °C-in <sup>2</sup> /W (°C-cm <sup>2</sup> /W) @ 10 psi, @ 0.04 in. (1mm) thick, “G” version	1.5 (9.7)	1.4 (9.1)	1.4 (9.1)	0.7 (4.5)	0.7 (4.5)	ASTM D5470
	Heat Capacity, J/g-K	1	1	1	1	1	ASTM E1269
	Coefficient of Thermal Expansion, ppm/K	N/A	250	250	150	150	ASTM E831
Electrical	Dielectric Strength, V <sub>AC</sub> /mil (KV <sub>AC</sub> /mm)	200 (8)	200 (8)	200 (8)	200 (8)	200 (8)	ASTM D149
	Volume Resistivity, ohm-cm	10 <sup>14</sup>	10 <sup>14</sup>	10 <sup>14</sup>	10 <sup>14</sup>	10 <sup>14</sup>	ASTM D257
	Dielectric Constant @1,000 kHz	5.3	6.5	6.5	8.0	8.0	ASTM D150
	Dissipation Factor @ 1,000 kHz	0.013	0.013	0.013	0.010	0.010	Chomerics Test
Regulatory	Flammability Rating (See UL File E140244 for Details)	V-0	V-0	V-0	V-0	V-0	UL 94
	RoHS Compliant	Yes	Yes	Yes	Yes	Yes	Chomerics Certification
	Outgassing, % TML (% CVCM)	0.44 (0.13)	0.42 (0.08)	0.35 (0.09)	0.19 (0.06)	0.18 (0.05)	ASTM E595
	Shelf Life, months from date of shipment G (A)	36 (18)	36 (18)	36 (18)	36 (18)	36 (18)	Chomerics

\*Thickness tolerance, in(mm) ±10% nominal thickness @ 0.1in (2.5mm) or less; ± 0.01in (0.25mm) @ nominal thickness greater than 0.1in (2.5mm). Custom thicknesses may be available upon request.

\*\*The typical deflection range is approximately 5-40%

\*\*\*Laminated polyester film provides low abrasion on one side as well as improved dielectric isolation.

# THERM-A-GAP™ HCS10, 569, 570, 579 and 580 Thermally Conductive Pads

## TYPICAL APPLICATIONS

- Telecommunications equipment
- Consumer electronics
- Automotive electronics (ECUs)
- LEDs, lighting
- Power conversion
- Desktop computers, laptops, servers
- Handheld devices
- Memory modules
- Vibration dampening

## HANDLING INFORMATION


These products are defined by Chomerics as “articles” according to the following generally recognized regulatory definition for articles:

An article is a manufactured item “formed to a specific shape or design during manufacturing,” which has “end use functions” dependent upon its size and shape during end use and which has generally “no change of chemical composition during its end use.”

In addition:

- There is no known or anticipated exposure to hazardous materials/substances during routine and anticipated use of the product.
- The product’s shape, surface, and design is more relevant than its chemical composition.

These materials are not deemed by Chomerics to require an MSDS. For further questions, please contact Chomerics at 781-935-4850.

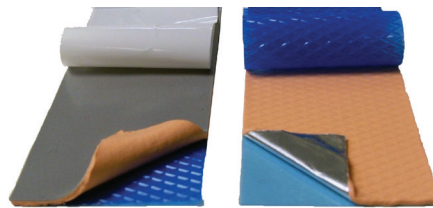

With Glass Carrier

HCS10A  
With Aluminium PSA Carrier

## PRODUCT ATTRIBUTES

### HCS10

- Economical solution
- Highest conformability gap filler sheet

### 569

- Economical combination of thermal performance and conformability

### 570

- Best for molding complex parts and vibration dampening

### 579

- Combination of excellent thermal performance and conformability

- Lowest outgassing

### 580

- Best for molding complex parts and vibration dampening

- Lowest outgassing

## Ordering Information

### Part Number:

6W

XX

YYYYY

ZZZZ

W	XX	YYYYY	ZZZZ
1 = OEM Sheet - No PSA (“G” carrier and HCS10) 2 = OEM Sheet with PSA 1 side (“A” Carrier only)	Material thickness* is in ten mil increments [e.g. 10 = 0.100” or 2.54 mm] [e.g. 02 = 0.020” or 0.50 mm]	<b>OEM Part Number Examples</b> 0909 = (9” X 9” Sheet / 22.9 cm X 22.9 cm).	<b>THERM-A-GAP™ Material Code</b>  <b>HCS10G &amp; HCS10A</b> <b>G569 &amp; A569</b> <b>G570 &amp; A570</b> <b>G579 &amp; A579</b> <b>G580 &amp; A580</b>  (THERM-A-GAP™ 174, 274, 574 and TS15 are legacy products and are available upon special request.)
9 = Custom configuration	11 = Custom, no PSA (“G” carrier and HCS10) 12 = Custom, with PSA 1 side (“A” Carrier only)	<b>Thermally conductive pads are available in the following formats.</b> <b>Distributor Part Numbers - 18” X 18” Sheets</b>  0.010 in = 28539 0.015 in = 28540** 0.020 in = 20698 0.030 in = 20913 0.040 in = 20684 0.050 in = 27395 0.060 in = 20991 0.070 in = 20685 0.080 in = 21259  <b>Custom configuration</b> (Please contact Chomerics for a pre-assigned part number, for custom widths, part sizes, etc. )	

\* See typical properties table for thicknesses.

\*\* Minimum thickness for G579 material.

Custom die-cut parts on sheets, or as individual parts  
 “A” version offered die-cut (up to 40 mil) on continuous rolls (higher volumes)  
 Custom thicknesses available upon request (up to 1” thick)  
 Custom molded designs and ribbed sheets