



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



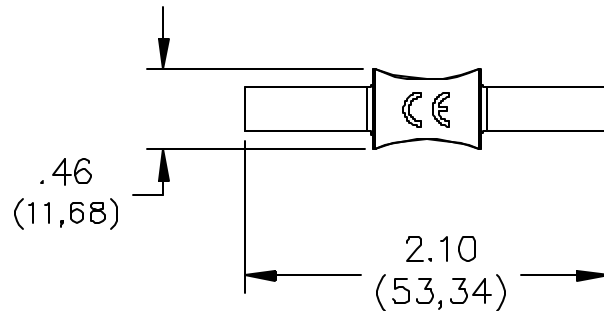

FEATURES:

- Interfaces to safety style sheathed 4 mm plugs.
- Provides a fast and easy method to splice two cables together to increase cable length.
- Complies to IEC 1010-2-031, which is the latest international safety standard for test accessories.
- For added safety, the insulation material is Polypropylene, Fire Retardant – UL94 V-2 rated.
- Mates to Pomona's Models 5907A, 5908A and 5909A flexible test leads.

MATERIALS:

Tubing: Brass, Nickel Plated

Insulation: Polypropylene, Color: One black and one red

RATINGS:

IEC 1010 2-031, Category III, P2 Compliant

Operating Temperature: 80°C (176°F) Max.

Operating Voltage: 1,000 VRMS/DC Max.

Current: 10 Amperes Max.

ORDERING INFORMATION: Model 6252

(Set of one black and one red)

Couplers are also included in many Pomona DMM Test Kits.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA