



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



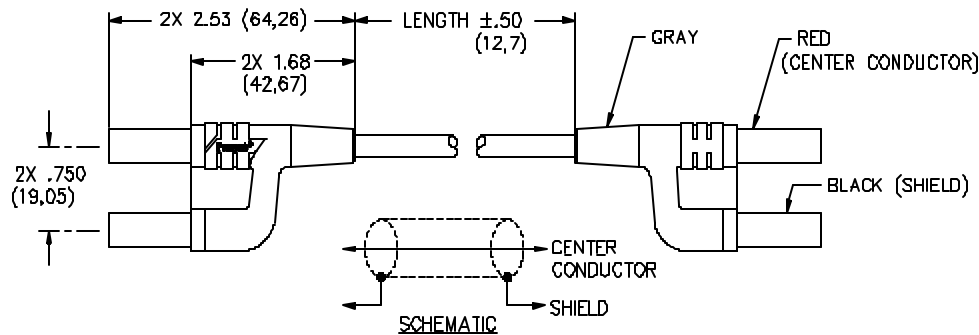

FEATURES:

- Cable is designed to be used with all standard .166" or 4mm diameter shrouded banana jacks spaced at .75" (19mm).
- Pomona's double banana plugs can be used with most digital multimeters.
- Offset design and color-coded black and red safety shrouds eliminate wrong polarity connections.
- Manufactured to comply with the latest safety standards.
- Molded strain relief increases reliability and durability of the cable.

MATERIALS:

Banana Plugs:

Body: Brass, Nickel Plated.

Springs: Beryllium Copper, Nickel Plated.

Inner Insulation: Polypropylene.

Insulation: Santoprene.

Safety Shrouds: Nylon, black and red.

Cable: RG58C/U, .195 (5,0) O.D., 50 OHMS Color: Black.

Marking: POMONA 6283-C-XX®

RATINGS:

IEC-1010-2-031, Category II, P2 compliant.

Operating Temperature: +55°C (+131°F) Max.

Operating Voltage: 600 VRMS.

ORDERING INFORMATION: Model 6283-C-XX

XX = Cable Length. See current catalog for available lengths.

Ordering Example: 6283-C-12 Cable length is 12" (304,8) Cable is RG58C/U, .195 (5,0) color is black.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA