



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





6321F Series T-1 Circuit Board Indicator

T-1 LED block mounting design assures height and side-by-side spacing alignment saves assembly costs

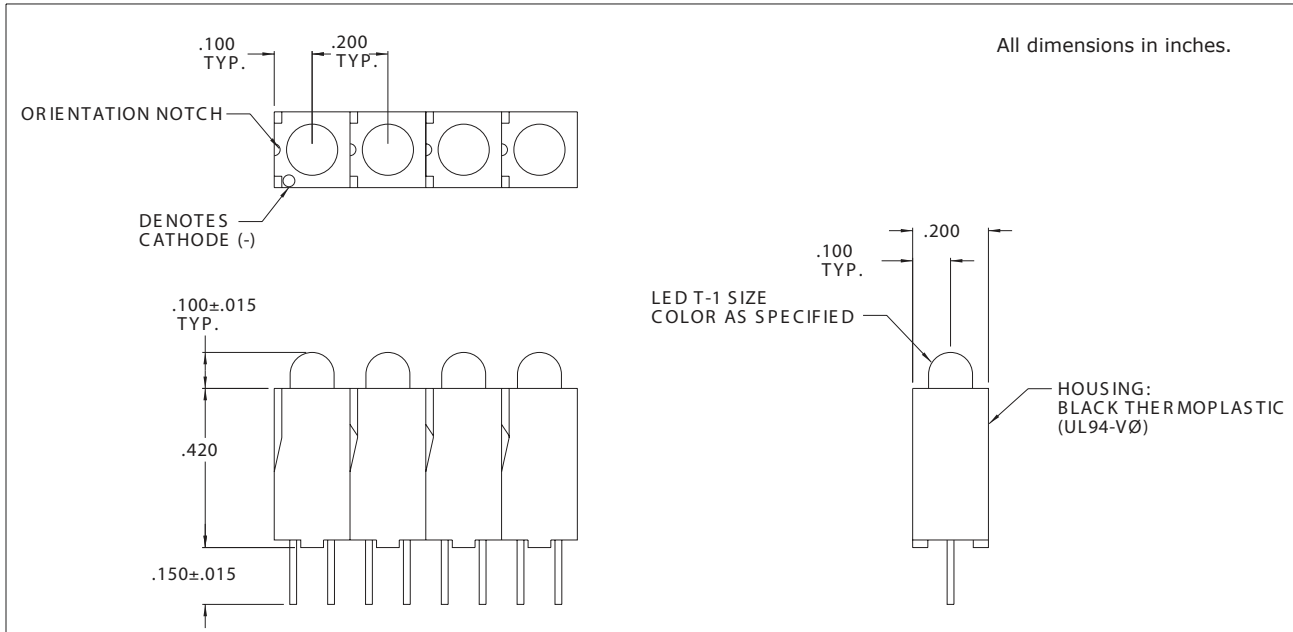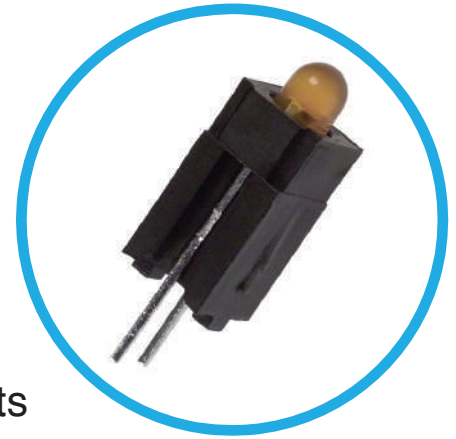


Features

- T-1 LED block mounting design assures height and side-by-side spacing alignment saves assembly costs.
- Blocks have interlock feature which allows for multi LED arrays.
- Black plastic mounting block provides high contrast ratio.
- High Brite and Super Brite light output.
- Standoffs prevent flux entrapment.
- Meets UL 94V-0 and Bellcore flammability specifications.
- RoHS Compliant

Available options:

- Low current, 5 Volt and 12 Volt built-in resistors.
- Bicolor and blue LEDs also offered.

Call factory for ordering information.

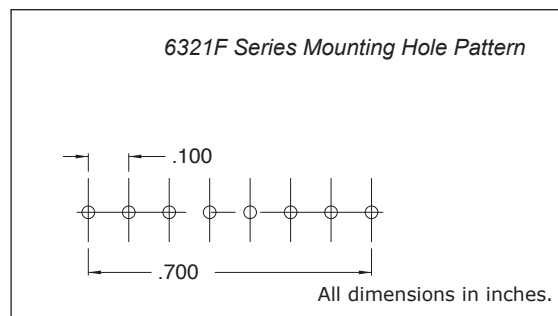

Electro-Optical Characteristics and Ratings

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
6321F1	Red	10	10	25	1.9	3.0	5	635
6321F3	Amber	16	20	60	2.0	3.0	3	610
6321F5	Green	8.5	10	25	2.1	3.0	5	565
6321F7	Yellow	10	10	25	2.0	3.0	5	583