



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



6322F Series Dual Mounted T-1 LED Block Assembly

Description and Features

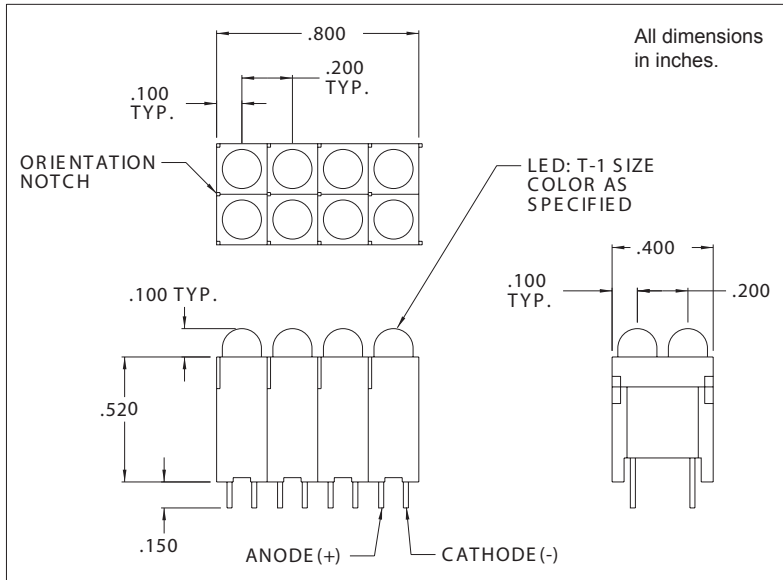

Features


- Dual mounted T-1 LED mounting design assures height and side-by-side spacing alignment, saves assembly costs .
- Blocks have interlock feature which allows for multi LED arrays .
- Black plastic mounting block provides high contrast ratio.
- High Brite and Super Brite light output.
- Standoffs prevent flux entrapment.
- Housing: Black Thermoplastic
- Meets UL94V-O and Bellcore flammability specifications .

Refer to "Mounting Hole Pattern 4.pdf"

Available options : Low current, 5 volt and 12 volt built-in resistors , bicolor and blue LEDs also offered. Call factory for ordering information.

Ordering information: Use chart below to determine model number.

	Red	Amber	Green	Yellow
LED	1	3	5	7



Model No. is as follows: 6322F Pos. 1 ; Pos. 2

Example: Position 1 is red, position 2 is yellow.
The part number is 6322F17.

Electro-Optical Characteristics and Ratings

PartNumber	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward CurrentMax. (mA)	ForwardVoltage		Reverse Breakdown VoltageMin.(V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
6322F11	Red/Red	10.0	10	25	2.2	3.0	5.0	635
6322F33	Amber/Amber	6.5	10	25	2.2	3.0	5.0	602
6322F55	Green/Green	8.5	10	25	2.3	3.0	5.0	565
6322F77	Yellow/Yellow	10.0	10	25	2.2	3.0	5.0	583