



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Model 6340  
Deluxe DMM Maxi Test Lead Kit**

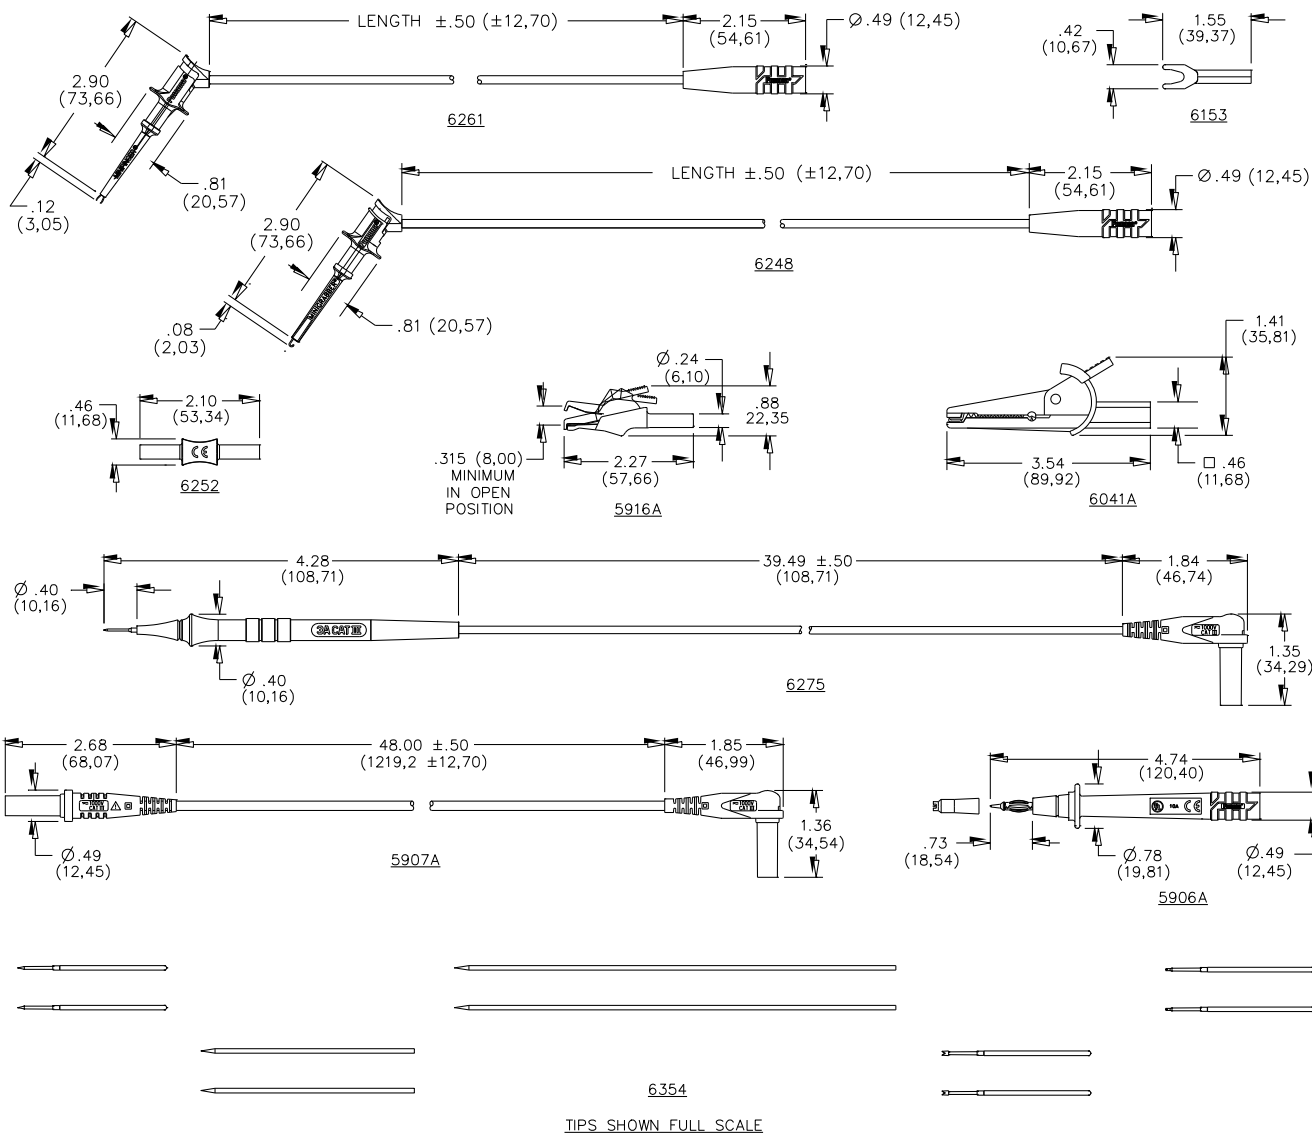

**FEATURES**

- Test probes and leads comply with IEC 61010-031 requirements
- Probes, alligator clips & spade lugs fit directly onto test leads for test versatility
- Test accessories conveniently store in the tri-fold nylon pouch provided
- Compatible with most Fluke, H.P., Tektronix & Wavetek digital multimeters
- Kit contains one set of black and white items below
- Wear indication with double insulated (dual extruded) silicone leads shows white or black inner layer for increased safety.

**USA:** Sales: 800-490-2361  
 Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
 Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.



**Model 6340  
Deluxe DMM Maxi Test Lead Kit**

**MATERIALS**

Model **6261**: Minipincer to Banana Jack: Body: Nylon  
Pincer: Beryllium-Copper, Gold Plated

Wire: 18 AWG, 192 x 41 bare copper, Silicone  
Insulation, O.D. 0.144" (3,66mm). Banana Jack Body  
– Brass, Nickel Plated Insulation – Nylon. **RATINGS**:  
Category II, 300V 5 Amperes

Model **6275**: Precision Electronic Probe: Right Angle  
Sheathed Banana Plug: Plug Body: Nickel plated  
brass. Banana Plug Spring: Nickel Plated Beryllium  
copper. Insulation: Polypropylene, Fire Retardant.  
Wire: 20 AWG, silicon rubber .089 (2,26mm) O.D.,  
Tips: Stainless Steel and one full set of replacement  
tips, see below. **RATINGS**: Operating Temperature;  
55° C., Voltage: CAT II 1000 V, 3 Amperes

Model **6041B**: Large Alligator Clip: Body-Steel, Nickel  
plated, Insulation-Nylon, Color: One Black, One Red,  
**RATINGS**: Voltage: CAT III 1000 V, 10 Amperes

Model **6153**: Spade Lug w/ Jack: ETP 110 Copper,  
1/2 Hard. Finish: Nickel Plated

Model **6252**: Banana Plug Coupler: Brass, Nickel  
Plated, Insulation: Nylon, **RATINGS**: CAT III 1000 V, 10 Amperes

Model **6248**: Minigrabber to Banana Jack: Body: Nylon, Hook: Beryllium Copper, Gold Plated, Wire: 18 AWG,  
Insulation – Silicone, .144", Banana Jack: Body – Brass, Nickel Plated, Insulation – Nylon, **RATINGS**:  
Category II, 300V, 5 Amperes

Model **5907A**: Test Lead Straight to Right Angle: Banana Spring: Nickel plated Beryllium Copper, Insulation –  
Polypropylene, Wire: 48" silicone 18" AWG, Color: One Black, One Red, **RATINGS**: IEC 61010-031, CAT III  
1000 V (with protective cap), CAT II 1000 V (without protective cap), 10 Amperes

Model **5906A**: Modular Probe with Banana Plug Tip: Probe Body: Nylon, Plug Tip: Brass, Nickel Plated, Spring  
– Beryllium Copper, Nickel Plated, 4mm Safety Jack: Brass, Nickel Plated, **RATINGS**: CAT III 1000V, 10  
Amperes

Model **5916A**: Medium Alligator Clip: Body–Steel, Nickel Plated, Color: One Black, One Red, **RATINGS**: CAT I  
300V, 5 Amperes

Model **6354**: Set of 5 Replacement Tips for the Model 6275 Probe



**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm),  
.xxx = ±.005" (.127 mm). All specifications are to the latest revisions.  
Specifications are subject to change without notice. Registered trademarks are  
the property of their respective companies.

**Model 6340**  
**Deluxe DMM Maxi Test Lead Kit****ORDERING INFORMATION: 6340** (Includes a kit of items from above)

Replacement P/N's:

• Model <b>6041B</b> : Ex-Large Alligator Clip Set
• Model <b>5916A</b> : Medium Alligator Clip Set
• Model <b>6153</b> : Spade Lug
• Model <b>6248-12-*</b> : Minigrabber Jack
• Model <b>5906A</b> : Modular Test Probe Set
• Model <b>5907A</b> : Test Lead Set Straight to Right Angle
• Model <b>6252</b> : Coupler Set
• Model, <b>6261-12-*</b> : Minipincer/Jack
• Model <b>6275</b> : Precision Electronic Probe Set
• Model <b>6354</b> : Set of 5 replacement tips 2 each: Plunger tip, gold plated, 1" & 3" stainless steel Straight tips, 3 point crown tip, plunger, and 4 point plunger tip

\* 0 - Black, 2 - Red Set = 1 Black, 1 Red

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm 0.02$ " (.51 mm),  
.xxx =  $\pm 0.005$ " (.127 mm). All specifications are to the latest revisions.  
Specifications are subject to change without notice. Registered trademarks are  
the property of their respective companies.