imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



POMONA .

Model 6353 2mm Tip Reach, SMD Micro Grabber Test Clip

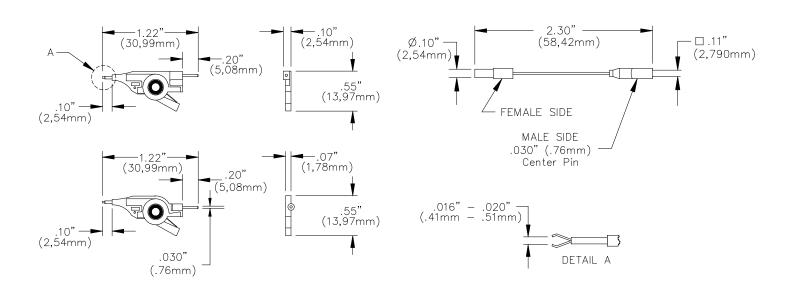

FEATURES:

- ✓ Use with PQFP packages with 0.3mm lead pitch or greater.
- ✓ 2mm long tip allows measurement at IC leads that are not easily accessible.
- ✓ Thin body style allows an unlimited number of clips to be stacked side by side.
- ✓ Maximum frequency is 100 MHz.

MATERIALS:

Leads: Stainless-Steel Wire Tip Tubing: TeflonTM Coated Nickel Plated Copper Body: ABS Flying Lead Connection: Gold Plated Copper **RATINGS:**



Operating Voltage: Hands free usage in controlled voltage environments: 70 Vrms maximum. For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

ORDERING INFORMATION:

Model 6353 (Kit contains ten test clips and ten flying leads)

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02^{\circ}$ (,51 mm), $.xxx = \pm .005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

> Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

POMONA .

Model 6353 2mm Tip Reach, SMD Micro Grabber Test Clip

^Domona[®]

The items included with this product are certified to meet IEC 1010-2-031 safety requirements.

Les éleménts inclus avec ce produit sont certifies pour répondre à des exigences de sûrete du IEC 1010-2-031.

Los items incluidos con este producto se certifican para resolver requisitos de seguridad del IEC 1010-2-031.

 Only IEC 1010 type shrouded test plugs should be used with IEC 1010 type jacks. NEVER INSERT A PROBE
TIP WITH BANANA SPRING INTO A TEST ACCESSORY JACK
THAT WILL BE USED AS A HAND HELD PROBING DEVICE -Seuls les vérificateurs de tension renforcés de type IEC 1010 devraient être utilisés avec des jacks de type IEC 1010. NE JAMAIS INSERER DE BOUT DE SONDE AVEC RESSORT BANANE DANS UN JACK D'ESSAI D'ACCESSOIRES QUI SERA UTILISE COMME DISPOSITIF DE SONDAGE A MAIN.

-Se deben usar sólo tapones de prueba reforzados del tipo IEC 1010 con receptáculos de tipo IEC 1010. NUNCA INTRODUZCA UNA CLAVIJA CON UN MUELLE TIPO BANANA EN UN RECEPTACULO DE PRUEBA QUE A SU VEZ SE USE COMO APARATO DE PRUEBA MANUAL.

R	Both Direct and Alternating Current. Courant Continu et Alternatif. Corriente Directa y Alterna.	Â	Caution ! Refer to Accompanying Documents. Attention ! Se Reporter aux Documentsjoints. ¡Peligro! Consulte los Documentos Adjuntos.
	Double Insulation or Reinforced Insulation. Isolation Double ou Isolation Renforée. Aislamiento Doble o Aislamiento Reforzado.	Â	Caution ! Risk of Electric Shock. Attention ! Risque de Choc Électrique. ¡Peligro! Riesgo de Sacudida Electrica.
CAT	Overvoltage Category I, II, III or IV. Surtension Catégorie I, II, III ou IV. Sobretensión de Categoria I, II III o IV.		
Pomona Electronics CE PO Box 9090, Everett, WA 98206-9090 TEL: 800-490-2361			

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02^{\circ}$ (,51 mm), $.xxx = \pm .005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

> Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com