



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



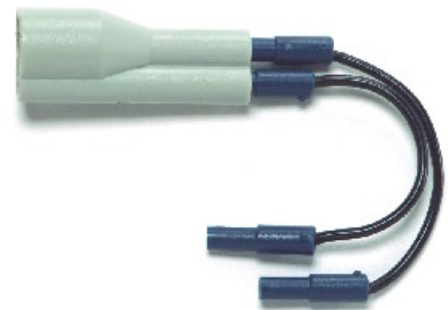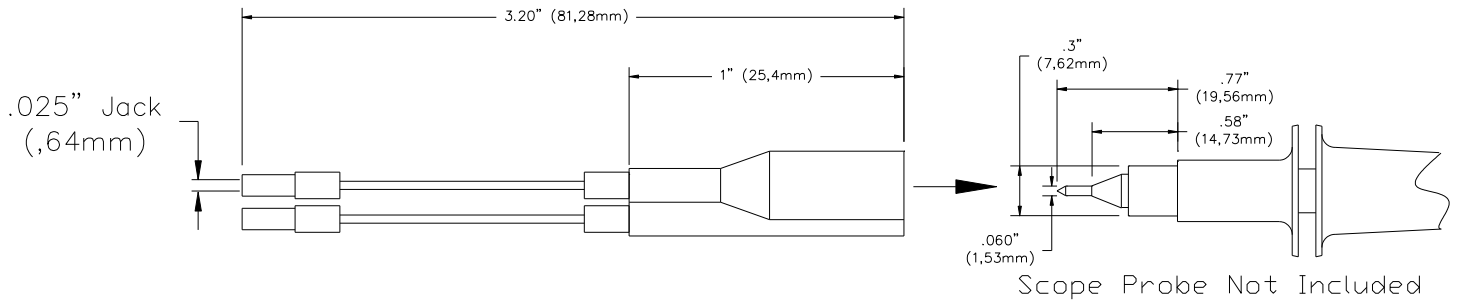

**FEATURES:**

- ✓ Adapter attaches to Pomona Monolithic Series Oscilloscope Probes.
- ✓ Interfaces with Pomona’s micro SMD grabbers
- ✓ Adapters provide electrical connection to probe tip and probe head grounding area
- ✓ Dual leads allows oscilloscope probe to attach to .025” (.64 mm) diameter posts.

*Fits Pomona Oscilloscope Probe Models:*

*SP150B, 4550B, 5795A, 5800A, 5803A, 5806A, 5809A, 5812A, 5827, 6049A, 6069A, 6101A, 6102A, 6265, 6266*

*Fits Pomona clips:*

*All IC test Clips and SMD 5360, 5790, 6151, 6311, 6312, 6351, 6352, 6353, 6442, 6444, 6490*

**RATINGS:**

Operating Voltage: Hands free usage in controlled voltage environments: 45 Vrms maximum. *For CE compliance:* not intended for hand-held use at voltage above 33 Vrms/45 Vdc.

**ORDERING INFORMATION:**

Model 6443

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.