



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV	DOCUMENT	CHANGED BY	CHECK
8	0018728	LKM 17FEB06	VA


HONEYWELL
PART NUMBER

64AT34 SERIES CHART 2

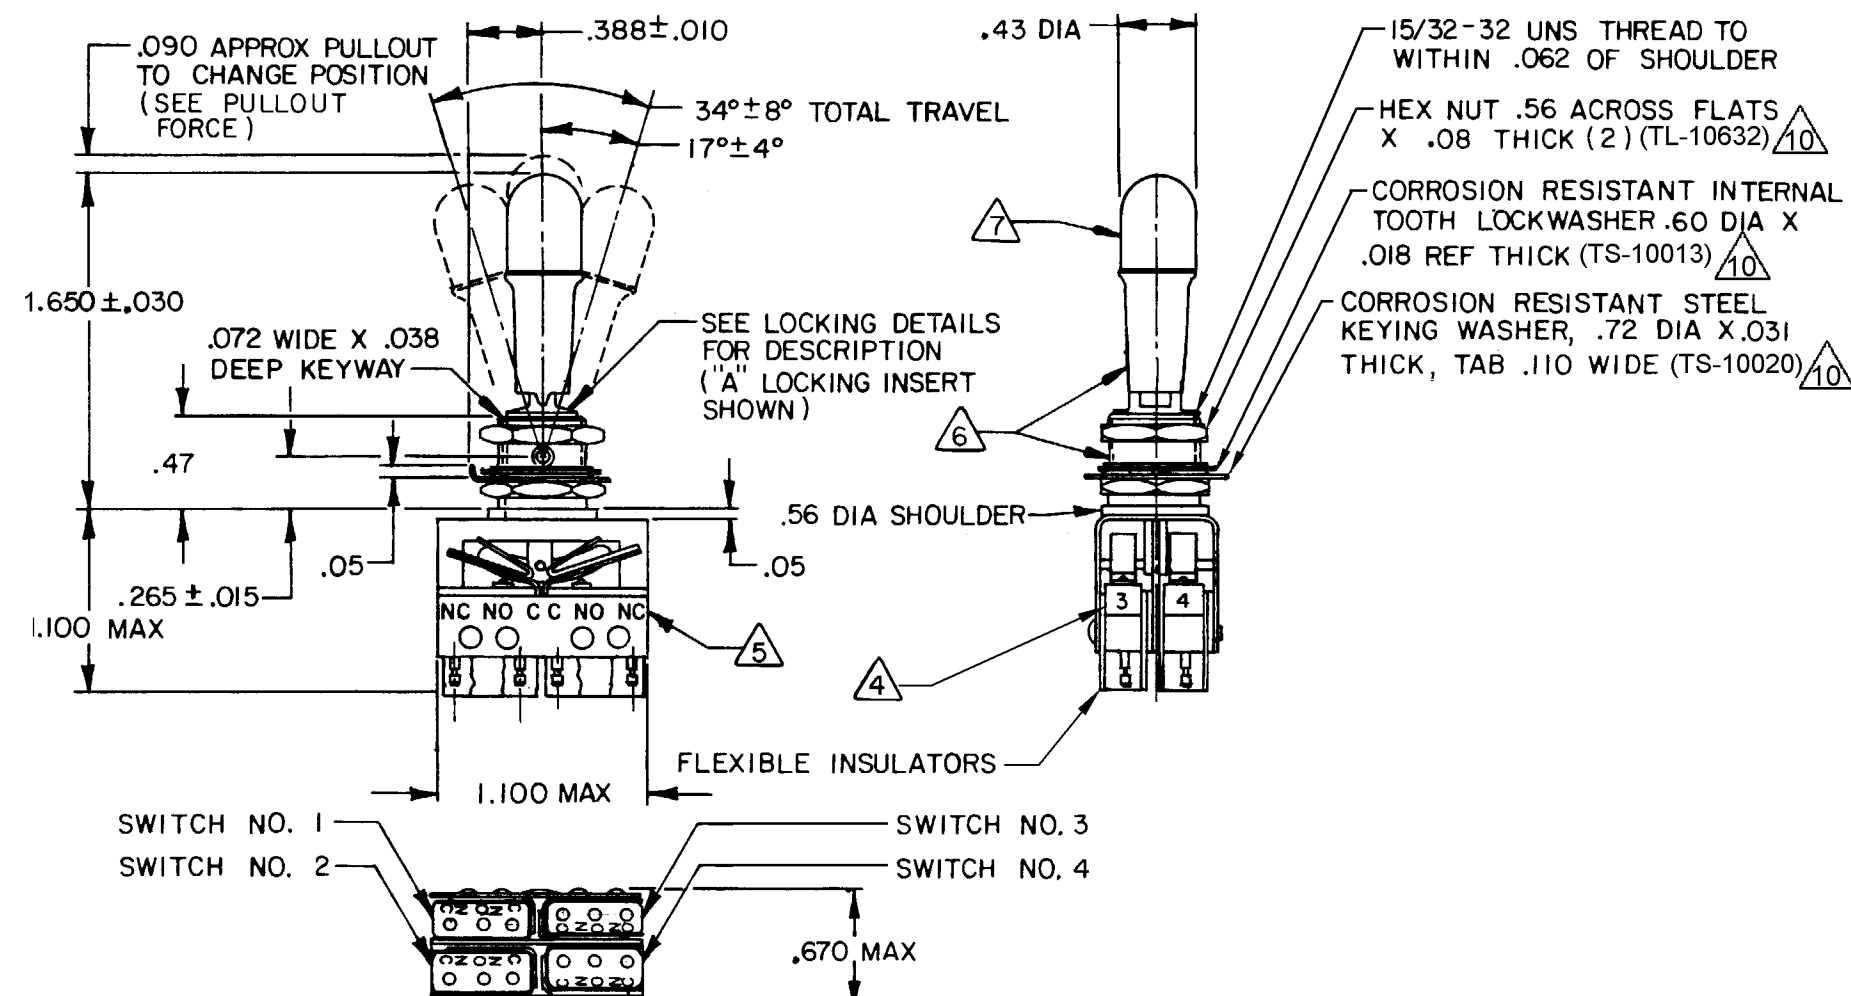

NOTES

- 1 - UNIT INCLUDES "23SX" TYPE (GOLD CONTACT) BASIC SWITCH (4)
(MEETS REQUIREMENTS OF MIL-PRF-8805)
- 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 - PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
- ④ SWITCH NUMBERS STAMPED ON END OF BASIC SWITCHES
- ⑤ TERMINAL DESIGNATION STAMPED ON BOTH SIDES OF UNIT
- ⑥ DULL FINISH ON LEVER AND BUSHING
- ⑦ FLAT WHITE RESILIENT SILICONE (50 DUROMETER APPROX)
- ⑧ SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING (SEE
CHART FOR RECOMMENDED LOCKING COMBINATIONS
- 9 - FOR REPLACEMENT BUTTON SEE MICRO SWITCH CAT. LIST. 15PA90-6W
- ⑩ HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET
15PA313-AT PER MIL-PRF -8805
- 11 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA313-AT
- ⑫ FOR MANUFACTURING DETAIL SEE THE CORRESPONDING ASSEMBLY DRAWING
FOR EACH LISTING FOR FAA-PMA.

CATALOG LISTING 	KEYWAY POSITION		CENTER POSITION		OPPOSITE KEYWAY POSITION		RECOMMENDED LOCKING COMBINATIONS
	C-NC	C-NO	C-NC	C-NO	C-NC	C-NO	
64AT34-1	1,2	3,4	ALL	NONE	3,4	1,2	A,B,D,E,F,G,H J,K,L,M,N,P
64AT34-3	1,2	3,4	NONE	NONE	3,4	1,2	D, F, G
64AT34-5	1,2 *	3,4 *	ALL	NONE	3,4	1,2	E, F, K, L, M, N
64AT34-7	1,2 *	3,4 *	ALL	NONE	3,4 *	1,2 *	E, L, N
64AT34-514	1,2	3,4	ALL	NONE	3,4 *	1,2 *	B, E, G, L, N, P

* ASTERISK DENOTES MOMENTARY POSITION

CAT. LISTING					
64AT34-1A					
64AT34-1B					
64AT34-1D					
64AT34-1E					
64AT34-1F					
64AT34-1G					
64AT34-1H					
64AT34-1J					
64AT34-1K					
64AT34-1L					
64AT34-1M					
64AT34-1N					
64AT34-1P					
64AT34-3D	FAA-PMA				
64AT34-3F					
64AT34-3G					
64AT34-5E					
64AT34-5F					
64AT34-5K					
64AT34-5L					
64AT34-5M					
64AT34-5N					
64AT34-7E					
64AT34-7L					
64AT34-7N					
64AT34-514B					
64AT34-514E					
64AT34-514G					
64AT34-514L					
64AT34-514N					
64AT34-514P					

CHARACTERISTICS	ELECTRICAL DATA
PULLOUT FORCE --- 3 LB MIN-5 LB MAX	CONTACT ARRANGEMENT S P D T (4)
	30 VOLTS DC RATING INDUCTIVE ---SEA LEVEL- 1/2 AMP 50,000 FT --- 1/2 AMP RESISTIVE ---SEA LEVEL- 1 AMP 60,000 FT --- 1 AMP MAXIMUM INRUSH ----- 2 AMP

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	
ANGLES		±	

THIRD ANGLE PROJECTION



DRAWN	SLB	21JUN82
CHECK	CEB	28JUN82
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell

TITLE

ASSEMBLY - TOGGLE SWITCH

SIZE

TYPE

DRAWING NAME

64AT34 SERIES CHART 2

8

SCALE FULL

WEIGHT .09 LB EST

SHEET 1 OF 1
