



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

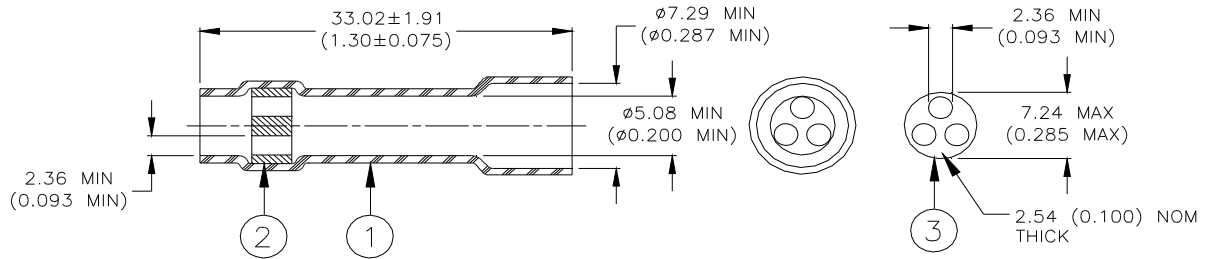

ITEM #1: SEALING SLEEVE

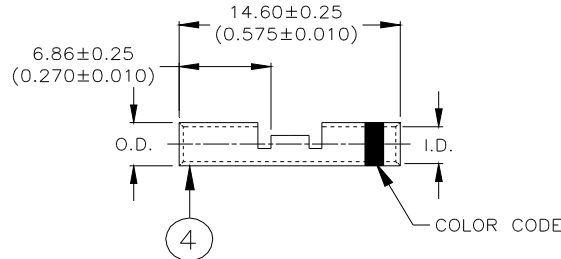

ITEM #2: CRIMP SPLICE

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. INTEGRAL MULTI-WIRE SEAL: Modified thermoplastic.
3. SEPARATE MULTI-WIRE SEAL: Modified thermoplastic.
4. CRIMP SPLICER: Base Metal: Copper Alloy 101 or 102 per ASTM B-75.
Plating: Tin per MIL-T-10727, Type 1.
Color Code: See table below.

Part Name	Prod. Rev.	Dimensions: Crimp Splice			Installation Data: Wire Size Range of Crimp Splicer			
		I.D.±0.05 (I.D.±0.002)	O.D.±0.08 (O.D.±0.003)	Color Code	Two Wires		Three Wires	
					Minimum	Maximum	Minimum	Maximum
D-436-42	F	1.70 (0.067)	2.62 (0.103)	Blue	2 x 24	2 x 20	3 x 24	3 x 22
D-436-43	A	2.54 (0.100)	3.81 (0.150)	Yellow	2 x 22	2 x 16	3 x 22	3 x 18

APPLICATION

1. These parts are designed to provide an immersion resistant in-line splices of 2 or 3 to 2 or 3 wires falling within the size range listed above, having insulations rated for at least 135°C.
2. Parts are available only as an assembly of one of each Item #1 and Item #2.
3. Crimp splicer may be installed with Raychem AD-1377 crimp tool or equivalent.
4. Inside diameter and outside diameter of splice are to be measured in crimp area, 2.54 to 5.08 (0.100 to 0.200) from ends of part. Slight burr permitted on parted surfaces.
5. Acceptance sampling shall be in accordance with paragraph 4.6.1 of MIL-T-7928.
6. Packing and packaging shall be in accordance with Section 5, Level C, of MIL-T-7928.
7. This document takes precedence over documents referenced herein.

1.0 TEST ASSEMBLIES

		TE Connectivity 305 Constitution Drive Menlo Park, CA 94025, USA		Raychem Products		TITLE: IN-LINE SPLICE SEALING SYSTEM, MULTI-WIRE	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: D-436-42/-43			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: 15-Apr-11	DOC ISSUE: 2		
DRAWN BY: M. FORONDA	REPLACES: N/A	DCR NUMBER: D001303	PROD. REV. SEE TABLE	SCALE: None	SIZE: A	SHEET: 1 of 4	

If this document is printed it becomes uncontrolled. Check for the latest revision.

SPECIFICATION CONTROL DRAWING

The test assemblies for qualification testing shall be 3 to 3 in-line splices made in wire conforming to MIL-W-81044/12 or MIL-W-16878/4. The assemblies shall be divided equally between the maximum and minimum wire size as shown below:

<i>Assembly</i>	<i>Minimum</i>	<i>Maximum</i>
D-436-42	24	22
D-436-43	22	18

The qualification sample shall consists of 35 assemblies and 8 uninstalled sleeves.

1.1 Acceptance Testing:

Acceptance sampling shall be in accordance with ANSI/ASQC Z1.4, Inspection Level S-4. The Acceptable Quality Level shall be 4.0 for all defects.

Acceptance tests shall consist of visual and dimensional examination.

2.0 QUALIFICATION TESTING:

.1 All sleeves shall be tested for compliance with Sheet 1 in regard to:

<i>Property</i>	<i>Test Method</i>
Material and Appearance	Visual Examination
Dimensions	MIL-I-23053, Paragraph 4.6.3


2.2 Test Group A: Ten assemblies shall pass the post conditioning tests after conditioning in the sequence shown:

<i>Post Conditioning</i>	<i>Requirement</i>	<i>Test Method</i>
Insulation Resistance	5000 M @500V d-c	MIL-W-81044, Par. 4.7.5.2
Altitude Immersion	75,000 ft.	MIL-C-26500, Par. 4.7.21
Insulation Resistance	5000 M @500V d-c	MIL-W-81044, Par. 4.7.5.2
Dielectric Withstanding	2.5Kv (rms) for 1 min.	MIL-W-81044, Par. 4.7.5.1

<i>Conditioning</i>	<i>Parameters</i>	<i>Test method</i>
Altitude Immersion	75,000 ft.	MIL-C-26500, Par. 4.7.21
Immersion	Condition C	Method 104*
Temperature Cycling	-65°C to 150°C (5 cycles)	Method 102*
Moisture Resistance	Step 7b not required	Method 106*
Fluid Immersion	MIL-H-5606, MIL-L-7808	MIL-T-7928, Par. 4.8.8
Heat Aging	96 hours @200°C	Method 108*

2.3 Test Group B: Ten Assemblies:

<i>Test Sequence</i>	<i>Requirement</i>	<i>Test Method</i>
----------------------	--------------------	--------------------

		TE Connectivity 305 Constitution Drive Menlo Park, CA 94025, USA	Raychem Products	TITLE: IN-LINE SPLICE SEALING SYSTEM, MULTI-WIRE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: D-436-42/-43				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: 15-Apr-11	DOC ISSUE: 2		
DRAWN BY: M. FORONDA	REPLACES: N/A	DCR NUMBER: D001303	PROD. REV. SEE TABLE	SCALE: None	SIZE: A	SHEET: 2 of 4	

If this document is printed it becomes uncontrolled. Check for the latest revision.

SPECIFICATION CONTROL DRAWING

Insulation Resistance	5000 M @500V d-c	MIL-W-81044, Par. 4.7.5.2
Vibration	MIL-STD-202, Method 201	MIL-T-7928, Par. 4.8.6
Insulation Resistance	5000 M @500V d-c	MIL-W-81044, Par. 4.7.5.2
Altitude Immersion	75,000 ft. (1 cycle)	MIL-C-26500, Par. 4.7.21
Insulation Resistance	5000 Megaohms	MIL-W-81044, Par. 4.7.5.2
Voltage Drop**	Wire Equivalent + 2.0 millivolts (maximum)	MIL-T-7928, Par. 4.8.1
Tensile Strength	Table II	MIL-T-7928, Par. 4.8.7

* Test methods are per MIL-STD-202.

** Test current shall be equal to 3X the rated current for the smallest gauge wire used.

2.4 Test Group C: Ten Assemblies:

<i>Test Sequence</i>	<i>Requirement</i>	<i>Test Method</i>
Insulation Resistance	5000 M @500V d-c	MIL-W-81044, Par. 4.7.5.2
Salt Spray (Corrosion)***		MIL-T-7928, Par. 4.8.4
Insulation Resistance	5000 M @500V d-c	MIL-W-81044, Par. 4.7.5.2
Altitude Immersion	75,000 ft. (1 cycle)	MIL-C-26500, Par. 4.7.21
Insulation Resistance	5000 M @500V d-c	MIL-W-81044, Par. 4.7.5.2
Voltage Drop**	Wire Equivalent + 2.0 millivolts (maximum)	MIL-T-7928, Par. 4.8.1
Tensile Strength	Table II	MIL-T-7928, Par. 4.8.7

*** Lead ends to be sealed prior to exposure.

2.5 Test Group D: Five Assemblies:


<i>Test</i>	<i>Requirement</i>	<i>Test Method</i>
Flammability	Self Extinguishing within 15 seconds	MIL-T-7928, Par. 4.8.10

2.6 Test Group E: Three Sleeves:

<i>Test</i>	<i>Requirement</i>	<i>Test Method</i>
Corrosive Effect	Non-Corrosive	MIL-I-23053, Par. 4.6.10.2

2.7 Test Group F: Five Sleeves:

<i>Test</i>	<i>Requirement</i>	<i>Test Method</i>
Insulation Shrinkage	Sheet 1	MIL-I-23053, Par. 4.6.3.2.2

		TE Connectivity 305 Constitution Drive Menlo Park, CA 94025, USA	Raychem Products	TITLE: IN-LINE SPLICE SEALING SYSTEM, MULTI-WIRE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: D-436-42/-43				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: 15-Apr-11	DOC ISSUE: 2		
DRAWN BY: M. FORONDA	REPLACES: N/A	DCR NUMBER: D001303	PROD. REV. SEE TABLE	SCALE: None	SIZE: A	SHEET: 3 of 4	

If this document is printed it becomes uncontrolled. Check for the latest revision.

SPECIFICATION CONTROL DRAWING

Longitudinal Change	±10%	(5 minutes @ 300°C) MIL-I-23053, Par. 4.6.5.1 (5 minutes @ 300°C)
---------------------	------	---

TEHRMOFIT ASSEMBLY PROCEDURE:

1.0 SCOPE

This document outlines the procedure to be followed to obtain immersion resistant multiple wire butt splices using Thermofit Multi-Wire In-Line Splice Sealing System D-436-42/-43.

2.0 PROCEDURE

- a) Pass the wires to be attached to one barrel through the separate three wire seal. (Item 3) Pass the wires to be attached to the other barrel through the sealing sleeve from the three hole insert end.
- b) Strip wires 5/16" to 11/32" and crimp into splicer using one of the approved crimping tools (see below). Care must be taken that the wires remain untwisted between the splice and the three wire seals or the sealing sleeve cannot be positioned properly.
- c) Position the separate seal as close as possible to the splicer. Hold this piece in position by squeezing the wires directly behind it, and slide the sealing sleeve over the assembly so that the separate seal is as far inside the sleeve as possible.
- d) Apply heat, using the recommended heat source, first to the "separate" seal end, and then the other. Heat should be applied until insert melts and flows axially along the wires.

3.0 RECOMMENDED TOOLS


a. Crimp Tools

<i>Manufacturer</i>	<i>Model Number</i>
Raychem	AD-1377
Buchanan Electric Products	614080
Daniels manufacturing Company	OT-609

b. Heat Tools

<i>Heater</i>	<i>Reflector</i>
Thermogun #500A	TG-14
Shop Air Heater #CV-4504	991180
Mini-Gun #CV-5300	991319

Heater should be operated to give an air stream temperature of at least 550°F.

		TE Connectivity 305 Constitution Drive Menlo Park, CA 94025, USA	Raychem Products	TITLE : IN-LINE SPLICE SEALING SYSTEM, MULTI-WIRE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: D-436-42/-43				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: 15-Apr-11	DOC ISSUE: 2		
DRAWN BY: M. FORONDA	REPLACES: N/A	DCR NUMBER: D001303	PROD. REV. SEE TABLE	SCALE: None	SIZE: A	SHEET: 4 of 4	

If this document is printed it becomes uncontrolled. Check for the latest revision.