



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us




Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PRODUCT NO.
SEE TABLE

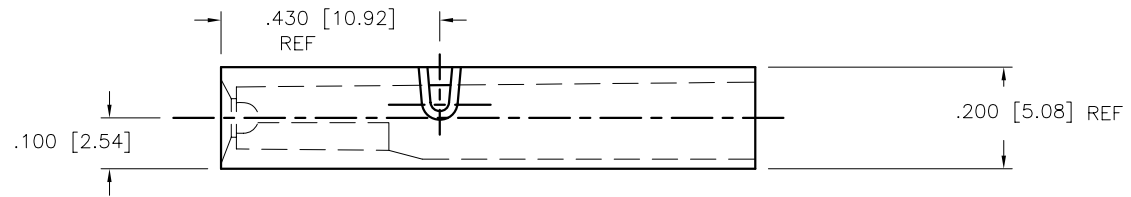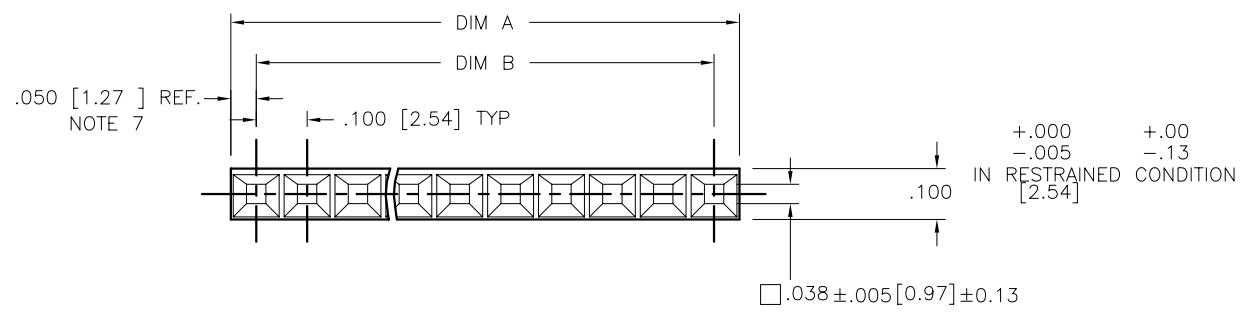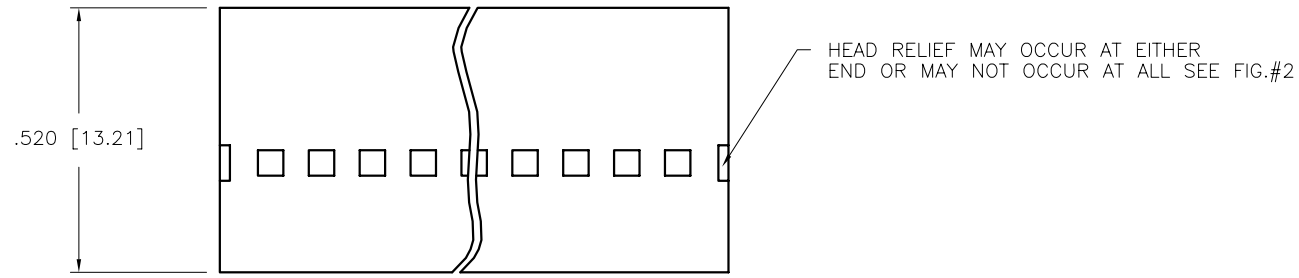

SCALE 6:1

mat'l. code SEE NOTE 1 & 2				surface	tolerance	projection	product family PV HOUSINGS		
ltr	ec'n no	dr	date	tolerances unless otherwise specified		INCH/MM	title MINI ROD HOUSING SR .100 [2.54] CC WITH RODS		
E	v51436	SAR	1996-01-22	angles	linear				
F	v90987	RGD	1999-06-22				scale 3:1		
G	v05-0712	DAI	2005-07-27	0° ± 2°					
H	v06-0448	HTB	2006-05-19	dr	S. ROYER	1996-01-22	FCJ		
J	v07-0563	HTB	2007-08-27	engr	T. HANNA	1996-01-22			
				chr	T. BREWBAKER	1996-01-22	dwg no 65272		
				appd	T. HANNA	1996-01-22			
sheet	revision	J	J	J			type Product Customer Drawing		
index	sheet	1	2	3					



FCconnect.com

Copyright FCI

PRODUCT NO.	NO. OF CAV.	DIM 'A'	DIM 'B'	NOTES & RESTRICTIONS	SPECIAL MARKINGS	CUSTOMER RESTRICTS.	RETENTION ROD INFO		
							ROD P/N	QTY	DIM 'C' REF.
65272-001LF	31	3.105 [78.87]	3.000 [76.20]	NOTE 6			65048-005	1	4.65 [118.11]
65272-002LF	30	3.005 [76.33]	2.900 [73.66]	NOTE 6			65048-013	1	3.45 [87.63]
65272-003LF	29	2.905 [73.79]	2.800 [71.12]	NOTE 6			65048-013	1	3.45 [87.63]
65272-004LF	28	2.805 [71.25]	2.700 [68.58]	NOTE 6			65048-013	1	3.45 [87.63]
65272-005LF	27	2.705 [68.71]	2.600 [66.04]	NOTE 6			65048-013	1	3.45 [87.63]
65272-006LF	26	2.605 [66.17]	2.500 [63.50]	NOTE 6			65048-013	1	3.45 [87.63]
65272-007LF	25	2.505 [63.63]	2.400 [60.96]	NOTE 6			65048-013	1	3.45 [87.63]
65272-008LF	24	2.405 [61.09]	2.300 [58.42]	NOTE 6			65048-013	1	3.45 [87.63]
65272-009LF	23	2.305 [58.55]	2.200 [55.88]	NOTE 6			65048-013	1	3.45 [87.63]
65272-010LF	22	2.205 [56.01]	2.100 [53.34]	NOTE 6			65048-013	1	3.45 [87.63]
65272-011LF	21	2.105 [53.47]	2.000 [50.80]	NOTE 6			65048-013	1	3.45 [87.63]
65272-012LF	20	2.005 [50.93]	1.900 [48.26]	NOTE 6			65048-013	1	3.45 [87.63]
65272-013LF	19	1.905 [48.39]	1.800 [45.72]	NOTE 6			65048-026	1	2.30 [58.42]
65272-014LF	18	1.805 [45.85]	1.700 [43.18]	NOTE 6			65048-026	1	2.30 [58.42]
65272-015LF	17	1.705 [43.31]	1.600 [40.64]	NOTE 6			65048-026	1	2.30 [58.42]
65272-016LF	16	1.605 [40.77]	1.500 [38.10]	NOTE 6			65048-026	1	2.30 [58.42]
65272-017LF	15	1.505 [38.23]	1.400 [35.56]	NOTE 6			65048-026	1	2.30 [58.42]
65272-018LF	14	1.405 [35.69]	1.300 [33.02]				65048-026	1	2.30 [58.42]
65272-019LF	13	1.305 [33.15]	1.200 [30.48]				65048-026	1	2.30 [58.42]
65272-020LF	12	1.205 [30.61]	1.100 [27.94]				65048-026	1	2.30 [58.42]
65272-021LF	11	1.105 [28.07]	1.000 [25.40]				65048-026	1	2.30 [58.42]
65272-022LF	10	1.005 [25.53]	.900 [22.86]				65048-026	1	2.30 [58.42]
65272-023LF	9	.905 [22.99]	.800 [20.32]				65048-040	1	1.30 [33.02]
65272-024LF	8	.805 [20.45]	.700 [17.78]				65048-040	1	1.30 [33.02]
65272-025LF	7	.705 [17.91]	.600 [15.24]				65048-040	1	1.30 [33.02]
65272-026LF	6	.605 [15.37]	.500 [12.70]				65048-040	1	1.30 [33.02]
65272-027LF	5	.505 [12.83]	.400 [10.16]				65048-040	1	1.30 [33.02]
65272-028LF	4	.405 [10.29]	.300 [7.62]				65048-040	1	1.30 [33.02]
65272-029LF	3	.305 [7.75]	.200 [5.08]				65048-040	1	1.30 [33.02]
65272-030LF	2	.205 [5.21]	.100 [2.54]				65048-040	1	1.30 [33.02]
65272-031LF	8	.805 [20.45]	.700 [17.78]		STYLE A	X	65048-040	1	1.30 [33.02]
65272-032LF	10	1.005 [25.53]	.900 [22.86]		STYLE B		65048-026	1	2.30 [58.42]
65272-033LF	8	.805 [20.45]	.700 [17.78]				65048-040	1	1.30 [33.02]
65272-034LF	6	.605 [15.37]	.500 [12.70]				65048-040	1	1.30 [33.02]

mat'l. code SEE NOTE 1 & 2				surface ☒ tolerance		projection		product family PV HOUSINGS	
ltr	ecr no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
J				angles	linear	.XX+01/XX+3		MINI ROD HOUSING SR	
						.XXX+005/XXX+13		.100 [2.54] CC WITH RODS	
				0'±2"		.XXXX+0020/XXX+051		scale 3:1	
				dr	S. ROYER	1996-01-22			sheet 2 of 3 size A3
				enrg	T. HANNA	1996-01-22			
				chr	T. BREWBAKER	1996-01-22			
				appd	T. HANNA	1996-01-22			
sheet index		revision sheet						type Product Customer Drawing	

PRODUCT NUMBER
SEE TABLE

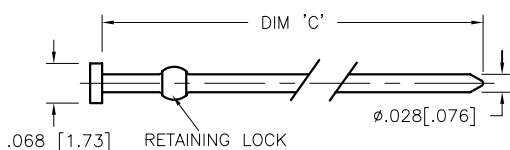


FIG. 1 RETENTION ROD DETAIL
SCALE 4:1

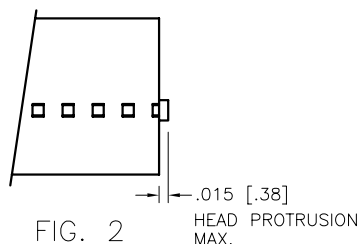


FIG. 2




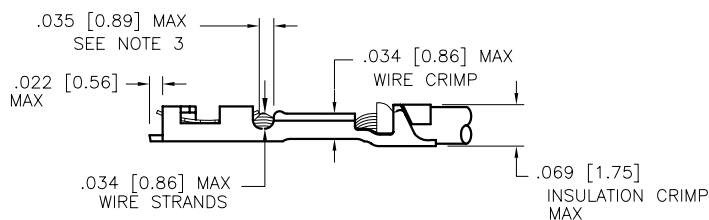


FIG. 3
RECOMMENDED
CRIMP INFORMATION
SCALE 4:1

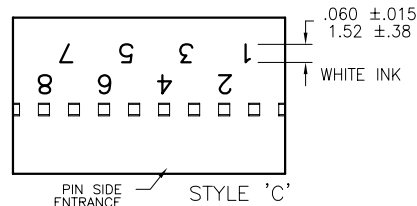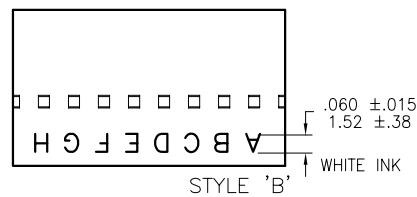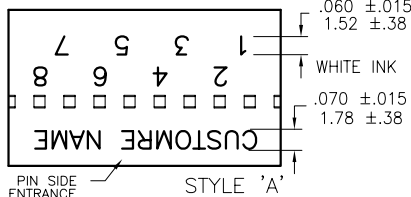

NOTES:

- HOUSING MATERIAL: MODIFIED POLYPHENYLENE ETHER, FLAME RETARDANT PER UL 94V-0, COLOR: BLACK.
- ROD MATERIAL: NYLON (NATURAL COLOR) SEE FIGURE #1 FOR DIMENSIONS.
- TO MAKE PROPER CONTACT, ALL MALE PINS FOR EACH HOUSING MUST BE WITHIN $\pm 0.15/0.38$ IN LENGTH. MIN. PIN LENGTH IS .180/4.57.
- MAX. WIRE CRIMP AND WIRE STRANDS ARE SHOWN IN FIGURE #3 SEE MINI PV™ TERMINAL SPECIFICATION TA0210 FOR CORRECT CRIMP HEIGHT FOR EACH WIRE SIZE. PRODUCT SPECIFICATION: BUS-12-067.
- THIS HOUSING IS INTENDED FOR USE WITH MINI PV™ TERMINAL WITH 22-32 GAUGE WIRE, MEETING SPECIFICATIONS SHOWN IN FIG.#3.
- HEAD RELIEF WILL OCCUR AT LEAST ONCE PER HOUSING ON THESE LISTINGS.
- RETENTION RODS ARE INCLUDED WITH MINI ROD HOUSINGS. RODS TO BE TRIMMED AFTER INSERTION.
- PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESS.

mat'l. code SEE NOTE 1 & 2				surface	tolerance	projection	product family
ltr	ecrn no	dr	date		tolerances unless otherwise specified		PV HOUSINGS
J				angles	linear	INCH/MM	title
				0° ± 2°	linear	scale 3:1	MINI ROD HOUSING SR
				dr	S. ROYER	1996-01-22	.100 [2.54] CC WITH RODS
				engr	T. HANNA	1996-01-22	dwg no
				chr	T. BREWBAKER	1996-01-22	sheet 3 of 3
				appd	T. HANNA	1996-01-22	size
sheet	revision						A3
index	sheet						type
							Product Customer Drawing