



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Wire Lead Toggle & Push Button Switches

RATINGS	CIRCUIT	ACTION	TOGGLE		BUSHING LENGTH	CATALOG NUMBER	TYPE OF TERMINATION	ACTUATOR MATERIAL
			TYPE	LENGTH				

## 6600 SERIES TOGGLE

Optional Lead Lengths Available Upon Request

10A-125VAC 8A-125V 4A-250V 1/3 HP, 125VAC	SPST	OFF-ON	BAT	.562	.325	6600	6" WIRE LEADS 1/2" STRIPPING #18 GAUGE	NICKEL PLATED BRASS
			BAT	.812	.325	6601		
			BAT	.687	.468	6601-100		
			BALL	.375	.325	6602		PLASTIC
			BAT	.562	.325	6603		
12A-125VAC 8A-125V 4A-250V 1/3 HP, 125VAC	SPST	OFF-ON	BAT	.562	.325	6630	6" WIRE LEADS 1/2" STRIPPING #16 GAUGE	NICKEL PLATED BRASS
			BAT	.812	.325	6631		
			BAT	.687	.468	6631-100		
			BALL	.375	.325	6632		
15A-125VAC 1/2 HP, 125VAC	SPST	OFF-ON	BAT	.562	.325	6606	6" WIRE LEADS 1/2" STRIPPING #16 GAUGE	NICKEL PLATED BRASS
			BAT	.812	.325	6607		
			BAT	.687	.468	6607-100		
			BALL	.375	.325	6608		

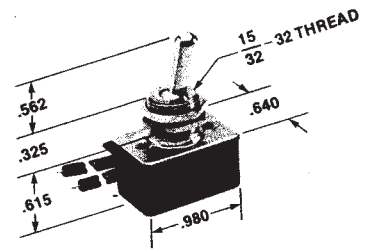


RATINGS	CIRCUIT	ACTION	ACTUATOR	CATALOG NUMBER	TYPE OF TERMINATION
---------	---------	--------	----------	----------------	---------------------

## 6611 & 6612 SERIES PUSHBUTTON

Optional Lead Lengths Available Upon Request

10A-125VAC 8A-125V 4A-250V 1/3HP-125VAC	SPST	PUSH ON/PUSH OFF	METAL PLUNGER	6611	6" WIRE LEADS 1/2" STRIPPING #18 GAUGE
			METAL LOW PROFILE	6611-LP	
			NYLON PLUNGER	6612	
12A-125VAC 8A-125V 4A-250V 1/3HP-125VAC	SPST	PUSH ON/PUSH OFF	METAL PLUNGER	6641	6" WIRE LEADS 1/2" STRIPPING #16 GAUGE
			METAL LOW PROFILE	6641-LP	
			NYLON PLUNGER	6642	
15A-125VAC 1/2HP-125VAC	SPST	PUSH ON/PUSH OFF	METAL PLUNGER	6616	6" WIRE LEADS 1/2" STRIPPING #16 GAUGE
			METAL LOW PROFILE	6616-LP	
			NYLON PLUNGER	6617	



6 SERIES L.P.

## SPECIFICATIONS

### Agency Listings

CSA Certified

### Contact Mechanism

Quick-Make/Quick-Break Wiping Action

### Contact Material

6600-6632 Series: Copper Alloy

6611-6642 Series: Copper Alloy

6606-6608 Series:

6616-6617 Series:

Stationary - Copper Alloy With Silver Cadmium Oxide Inlay

Movable - Copper Alloy/Silver Plated

### Dielectric Strength

1000 Volts RMS Minimum

### Mounting Means

15/32" Diameter Threaded Bushing

Keyway .078-.083 Wide X .037-.043 Deep

Standard Hardware Supplied —

One Hex Nut Assembled And

One Hex Nut Unassembled

