



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



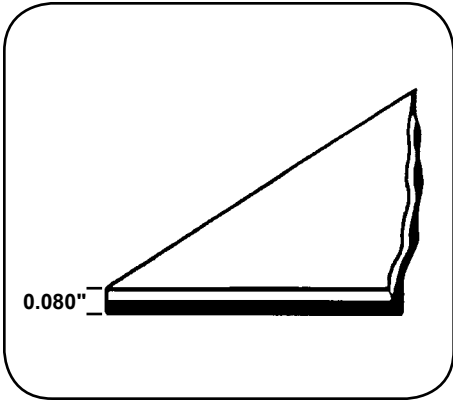

Blue

### Electrical Properties:

Property	Test Method	Value
Rtt Resistance (Blue top layer):	ANSI/ESD S4.1	1 x 10 <sup>6</sup> to < 1 x 10 <sup>9</sup> ohms
Rtt Resistance (Black bottom layer):	ANSI/ESD S4.1	< 1 x 10 <sup>5</sup> ohms

### Specifications:

**Construction:** Dual-layer Rubber  
**Thickness:** 0.080" (2mm)  
**Texture:\*** Slight Emboss  
**Colors:\*** Blue

\*Color and texture may vary between lots and mils

**No Detectable Levels of Silicone or DOP:** Approved\* for used in Class 100 cleanrooms. [Request a sample](#) to test to your requirements.

**Grounding:** This material must be properly grounded for optimum electrical performance. See Tech Bulletin [TB-2000](#) for mat grounding instructions.

**Cleaning:** For optimum electrical performance, surface must be cleaned regularly using an ESD mat cleaner. We suggest using our [Reztore Surface & Mat Cleaner](#). Do not use cleaners with silicone. Silicone buildup will create an insulative film on the surface.

### Compatible with Workstation Continuous Monitors

#### Disclaimer:

All statements, technical data, and recommendations contained herein are based upon tests we believe to be reliable. However, the accuracy or completeness thereof is not guaranteed. The proper and correct applications of products and data is the responsibility of the user. Statements or recommendations not contained herein shall have no force or effect unless embodied in a written agreement signed by authorized officers of Desco Industries, Inc.

#### RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials, or REACH substances of very high concern as of 2015/06/15, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Desco [Limited Warranty](#) at Desco.com.

#### Limited Lifetime Warranty:

Desco warrants for one year that Statfree® matting products will be free of defects in materials and workmanship and will guarantee dissipative/conductive mat properties for the life of the mat. Damage to matting caused by misuse of any kind, including using inappropriate cleaners is not covered by [Desco Limited Warranty](#).

#### Mat Item Numbers

Item	Size**
<a href="#">66320</a>	30" x 40"
<a href="#">66321</a>	16" x 24"
<a href="#">66322</a>	24" x 36"
<a href="#">66323</a>	24" x 48"
<a href="#">66324</a>	30" x 60"
<a href="#">66325</a>	30" x 72"

#### Clean Pack Item Numbers

Item†	Size**
<a href="#">66326</a>	16" x 24"
<a href="#">66327</a>	24" x 36"
<a href="#">66328</a>	24" x 48"
<a href="#">66329</a>	30" x 60"
<a href="#">66330</a>	30" x 72"

#### Mat Top Kit Includes

- 1 Mat, size as specified
- 1 [14213](#) Grounding Kit
- 1 Sample (4oz) of [Reztore Mat Cleaner](#)

† Cleaned and Packaged in a Class 1000 Controlled Environment. Click [HERE](#) to learn more.

\* Although cleanroom requirements vary, Statfree® UC2 material will most likely meet the requirements for a class 100 or higher clean room.

#### \*\*Tolerances:

Width ± .0250"  
Length ± .0250" every 1 linear foot of running material.  
Thickness ±10%

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to relax for at least 4 hours before cutting to size. Using care, always trim with a sharp knife or razor blade.

Specifications and procedures subject to change without notice.



Made in the United States of America

## STATFREE UC2™ DISSIPATIVE DUAL LAYER ULTRA CLEAN RUBBER

# DESCO

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](#)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

STATFREE UC2™  
DRAWING PM-131

DATE:  
December  
2015