



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Copyright FCI,

PRODUCT NO.
SEE TABLE

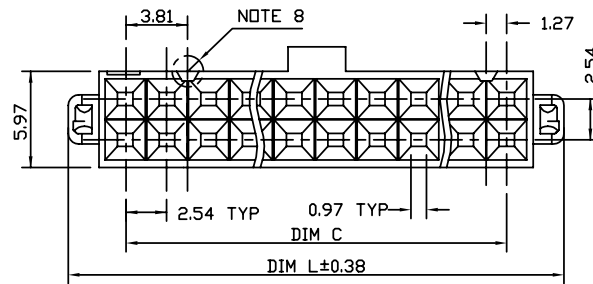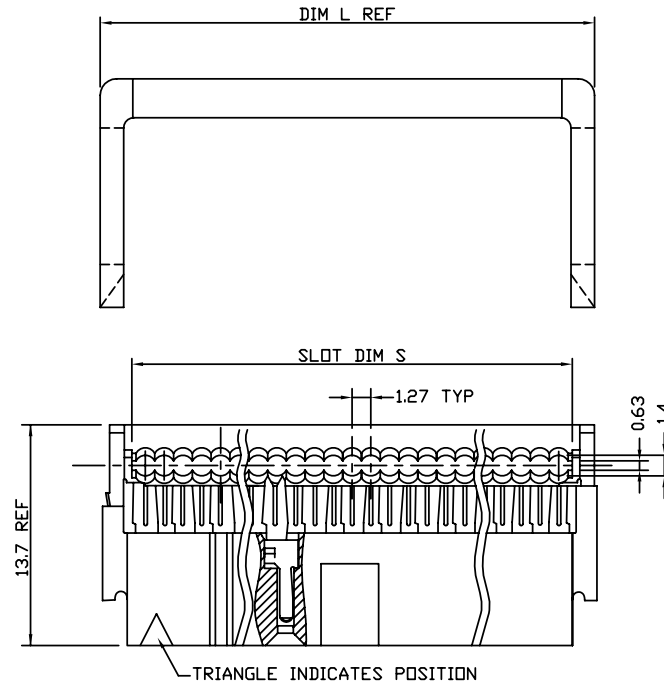

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		FCI		www.fciconnect.com		
ltr	ecn no	dr	date	linear	.X ± 0.10				projection		title DUAL POLARIZED QUICKIE II LOW PROFILE			
J	V22169	MSC	1992-05-21		.XX ± 0.05									
K	N05-0368	GUL	2005-12-27		.XXX ±									
L	N09-0400	AZH	2010-01-18	angles	± 2					scale 1:1	product family QUICKIE		code NT	
				dr	GuLing	12/27/05								
				engr	TaoDeniel	12/27/05								
				chr	TaoDeniel	12/27/05	size dwg no		A4		sheet 1 of 2			
				appd	Jason Zhou	12/27/05								
sheet index	revision sheet	L	1-2											

PDM: Rev:L


STATUS: Released

Printed: Apr 12, 2011



Copyright FCI.

1					2	3			4	5		6
PRODUCT NO.	SIZE	DIM L	DIM S	DIM C		DASH NO	COVER ORIENTATION		POLARIZATION		STRAIN RELIEF	
66432-X10/X10LF	2X5	17.27	13.21	10.16		-0XX	THRU	DUAL ENTRY	DUAL POL.		YES	
-X14/X14LF	2X7	22.35	18.29	15.24		-1XX	THRU	DUAL ENTRY	CENTER KEY & DUAL POL.		YES	
-X16/X16LF	2X8	24.89	20.83	17.78		-2XX	BLIND	RIGHT	DUAL		YES	
-X20/X20LF	2X10	29.97	25.91	22.86		-3XX	BLIND	RIGHT	CENTER KEY & DUAL POL.		YES	
-X24/X24LF	2X12	35.05	30.99	27.94		-4XX	BLIND	LEFT	DUAL POL.		YES	
-X26/X26LF	2X13	37.59	33.53	30.48		-5XX	BLIND	LEFT	CENTER KEY & DUAL POL.		YES	
-X30/X30LF	2X15	42.67	38.61	35.56		-6XX	BLIND	RIGHT	CENTER KEY & DUAL POL.		NO	
-X34/X34LF	2X17	47.75	43.69	40.64		-7XX	BLIND	LEFT	CENTER KEY & DUAL POL.		NO	
-X40/X40LF	2X20	55.37	51.31	48.26		-8XX	DISCONTINUED					
-X44/X44LF	2X22	60.45	56.39	53.34		-9XX	DISCONTINUED					
-X50/X50LF	2X25	68.07	64.01	60.96								
66432-X60/X60LF	2X30	80.77	76.71	73.66								

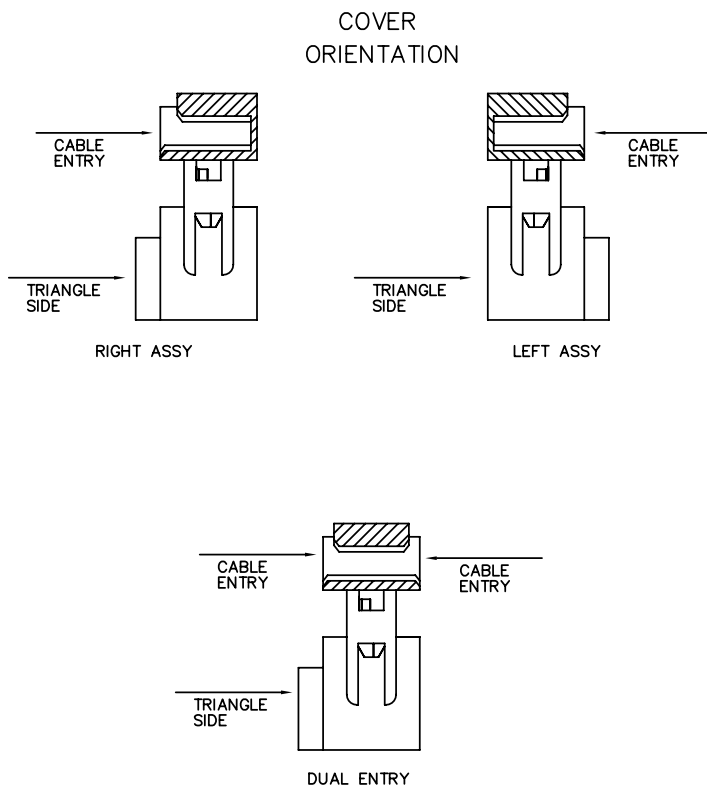

NOTES:

1. TERMINAL MATERIAL: FULL HARD PHOS. BRONZE ALLOY. UNS-C51000.
2. TERMINAL PLATING: 50u"/1.27um MIN Ni UNDERPLATE OVER ENTIRE TERMINAL AND 30u"/0.76um MIN Au OR GXT IN CONTACT AREA ONLY;
3. MOLDING MATERIAL: BASE & COVER-GLASS FILLED POLYESTER. FLAME RETARDANT PER UL94V-0. COLOR-BLUE.
4. CONNECTOR ASSEMBL ES PACKAGED IN TUBES.
5. THE FIRST TWO CAVITY POSITIONS AND THE LAST TWO. ARE IDENTIFIED BY NUMBER.
6. POLARIZING FEATURES ARE DESCRIBED IN TABLE.
7. MOLDING MATERIAL: STRAIN RELIEF-POLYSULFONE. FLAME RETARDANT PER UL 94V-0,COLOR-NATURAL.
8. THE POLARIZING FEATURE ON THIS END IS NON-EXISTANT ON 2X5 AND 2X7 POSITION CONNECTORS.
9. 2X5 POSITION NOT AVAILABLE WITH POLARIZATION SLOT ON CENTER KEY STYLE.
10. PRODUCT NUMBER 66432-XXX LF
LEAD FREE OPTION
11. WITH "LF" MARK, TERMINAL PLATING: 50u"/1.27um Ni UNDERPLATE OVER ENTIRE TERMINAL AND 30u"/0.76um MIN AU OR GXT IN CONTACT AREA ONLY.
12. FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
13. FOR LEAD FREE P/N, THE PLASTIC PART WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
14. PRODUCT SPEC. BUS-12-082
15. PLATING OPTIONS: MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

tolerances unless otherwise specified			CUSTOMER COPY		FCI		www.fciconnect.com	
linear	.X ± 0.1		projection 	title DUAL POLARIZED QUICKIE II LOW PROFILE				
	.XX ± 0.05							
	.XXX ±							
angles	±2							
dr	GuLing	12/27/05	INCH/MM		product family QUICKIE		code	
engr	TaoDeniel	12/27/05	↔		size dwg no		NT	
chr	TaoDeniel	12/27/05	scale		A4 66432		sheet	
appd	Jason Zhou	12/27/05	1:1				2 of 2	