



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## Technical Data Sheet

### Top View LEDs

#### 67-21B/R6C-AU2W1B/ET

#### Features

- PLCC-2 package.
- High flux output.
- High current capability.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Suitable for automatic placement equipment.
- Suitable for reflow and wave solder processes.
- Available on tape and reel (12mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.

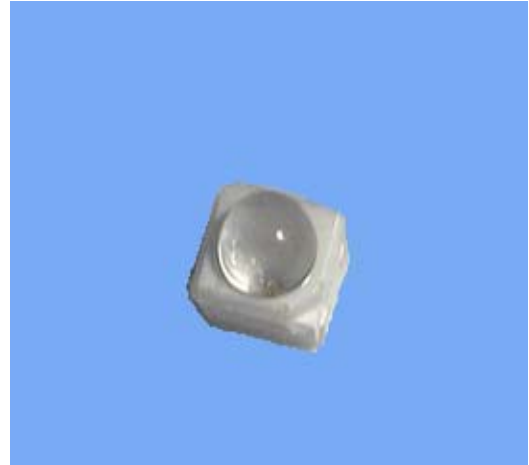

#### Descriptions

The 67-21B series is available in soft orange, red and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector.

This feature makes the 67-21B series LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

#### Applications

- Indicator and backlight for audio and video equipment.
- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

#### Device Selection Guide






| Chip     |               | Lens Color  |
|----------|---------------|-------------|
| Material | Emitted Color |             |
| AlGaInP  | Brilliant Red | Water Clear |

**Technical Data Sheet**


**Top View LEDs**

**67-21B/R6C-AU2W1B/ET**

**Package Dimensions**

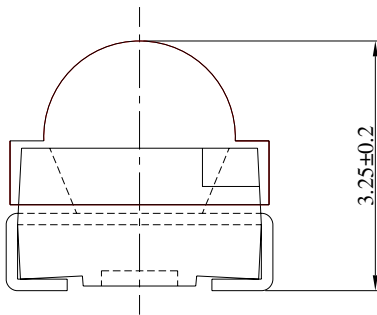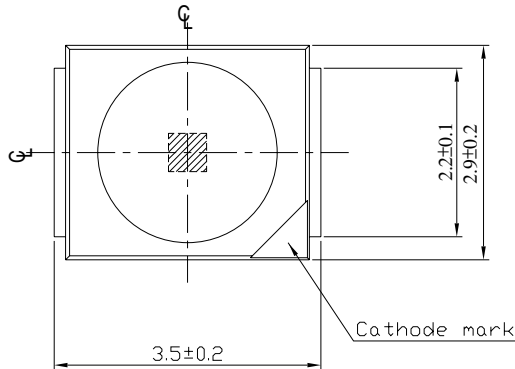

For reflow soldering (propose)

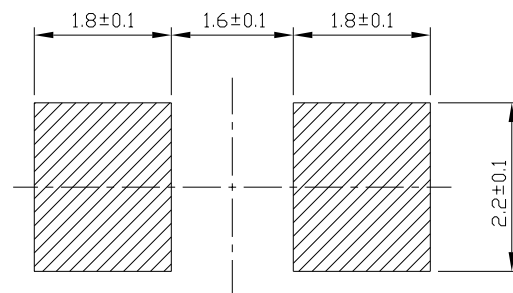

- Notes:** 1. All dimensions are in millimeters  
2. Tolerances Unless Dimension =  $\pm 0.1$  mm

**Technical Data Sheet**
**Top View LEDs**
**67-21B/R6C-AU2W1B/ET**
**Absolute Maximum Ratings ( $T_a=25^{\circ}\text{C}$ )**

| Parameter                              | Symbol    | Rating  | Unit               |
|--|-----------|---|--------------------|
| Reverse Voltage                        | $V_R$     | 5   | V                  |
| Forward Current                        | $I_F$     | 25  | mA                 |
| Peak Forward Current(Duty 1/10 @ 1KHz) | $I_{FP}$  | 60  | mA                 |
| Power Dissipation                      | $P_d$     | 60  | mW                 |
| Electrostatic Discharge (HBM)          | ESD       | 2000  | V                  |
| Operating Temperature                  | $T_{opr}$ | -40 ~ +85   | $^{\circ}\text{C}$ |
| Storage Temperature                    | $T_{stg}$ | -40~ +100   | $^{\circ}\text{C}$ |
| Soldering Temperature                  | $T_{sol}$ | Reflow Soldering : 260 $^{\circ}\text{C}$ for 10 sec.<br>Hand Soldering : 350 $^{\circ}\text{C}$ for 3 sec. |                    |

**Electronic Optical Characteristics ( $T_a=25^{\circ}\text{C}$ ) :**

| Parameter                    | Symbol          | Min.  | Typ.  | Max.  | Unit          | Condition         |
|------------------------------|-----------------|-------|-------|-------|---------------|-------------------|
| Luminous Intensity           | $I_v$           | 565   | ----- | 1420  | mcd           | $I_F=20\text{mA}$ |
| Viewing Angle                | $2\theta 1/2$   | ----- | 60    | ----- | deg           | $I_F=20\text{mA}$ |
| Peak Wavelength              | $\lambda_p$     | ----- | 632   | ----- | nm            | $I_F=20\text{mA}$ |
| Dominant Wavelength          | $\lambda_d$     | 617.5 | ----- | 633.5 | nm            | $I_F=20\text{mA}$ |
| Spectrum Radiation Bandwidth | $\Delta\lambda$ | ----- | 20    | ----- | nm            | $I_F=20\text{mA}$ |
| Forward Voltage              | $V_F$           | 1.75  | 2.0   | 2.35  | V             | $I_F=20\text{mA}$ |
| Reverse Current              | $I_R$           | ----- | ----- | 10    | $\mu\text{A}$ | $V_R=5\text{V}$   |

**Notes:**

1. Tolerance of Luminous Intensity  $\pm 11\%$
2. Tolerance of Dominant Wavelength  $\pm 1\text{nm}$
3. Tolerance of Forward Voltage  $\pm 0.1\text{V}$

**Technical Data Sheet**
**Top View LEDs**
**67-21B/R6C-AU2W1B/ET**
**Bin Range Of Luminous Intensity**

| Bin | Min  | Max  | Unit | Condition            |
|-----|------|------|------|----------------------|
| U2  | 565  | 715  | mcd  | I <sub>F</sub> =20mA |
| V1  | 715  | 900  |      |                      |
| V2  | 900  | 1120 |      |                      |
| W1  | 1120 | 1420 |      |                      |

**Bin Range of Dominant Wavelength**

| Group | Bin Code | Min.  | Max.  | Unit | Condition            |
|-------|----------|-------|-------|------|----------------------|
| A     | E4       | 617.5 | 621.5 | nm   | I <sub>F</sub> =20mA |
|       | E5       | 621.5 | 625.5 |      |                      |
|       | E6       | 625.5 | 629.5 |      |                      |
|       | E7       | 629.5 | 633.5 |      |                      |

**Bin Range Of Forward Voltage**

| Group | Bin | Min  | Max  | Unit | Condition            |
|-------|-----|------|------|------|----------------------|
| B     | 0   | 1.75 | 1.95 | V    | I <sub>F</sub> =20mA |
|       | 1   | 1.95 | 2.15 |      |                      |
|       | 2   | 2.15 | 2.35 |      |                      |

**Notes:**







1. Tolerance of Luminous Intensity  $\pm 11\%$
2. Tolerance of Dominant Wavelength  $\pm 1\text{nm}$
3. Tolerance of Forward Voltage  $\pm 0.1\text{V}$

**Technical Data Sheet**

**Top View LEDs**

**67-21B/R6C-AU2W1B/ET**

**Typical Electro-Optical Characteristics Curves**

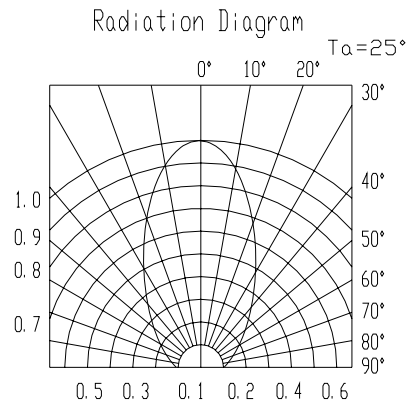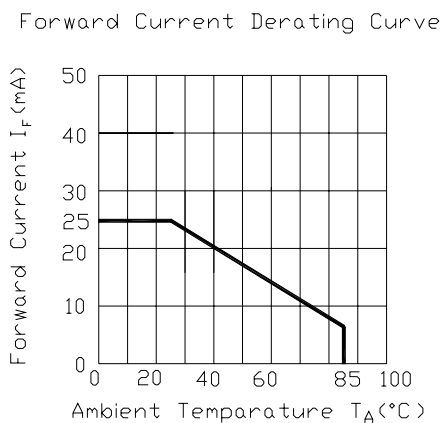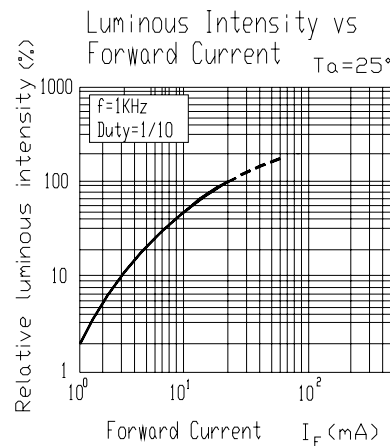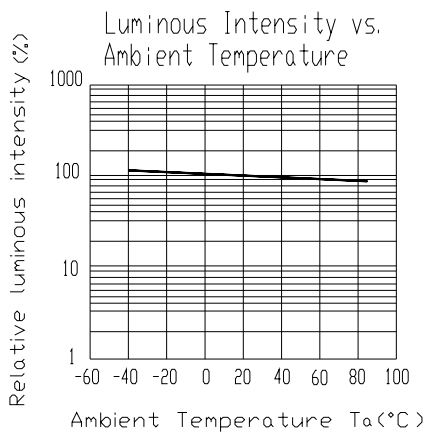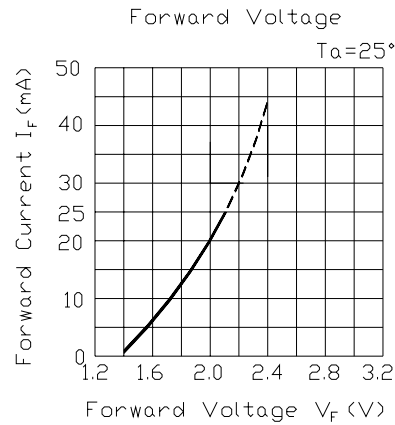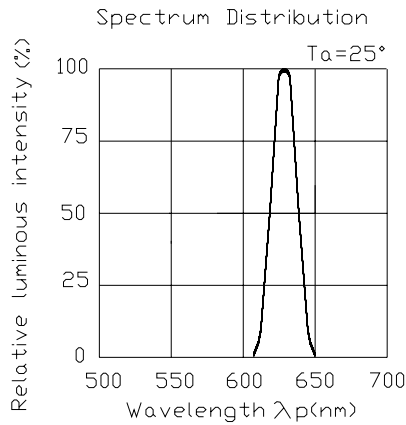

**Technical Data Sheet**

**Top View LEDs**

**67-21B/R6C-AU2W1B/ET**

**Label Explanation**


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



**Reel Dimensions**

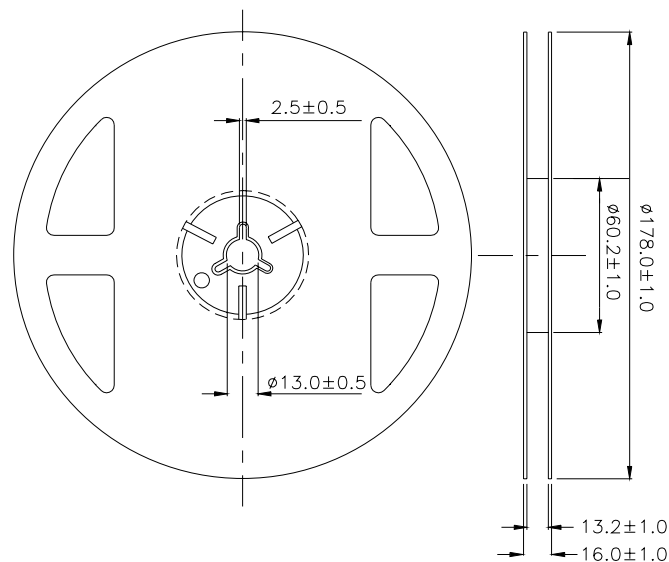


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm ,Unit = mm

**Technical Data Sheet**

**Top View LEDs**


**67-21B/R6C-AU2W1B/ET**

**Carrier Tape Dimensions: Loaded Quantity 500PCS per reel.**

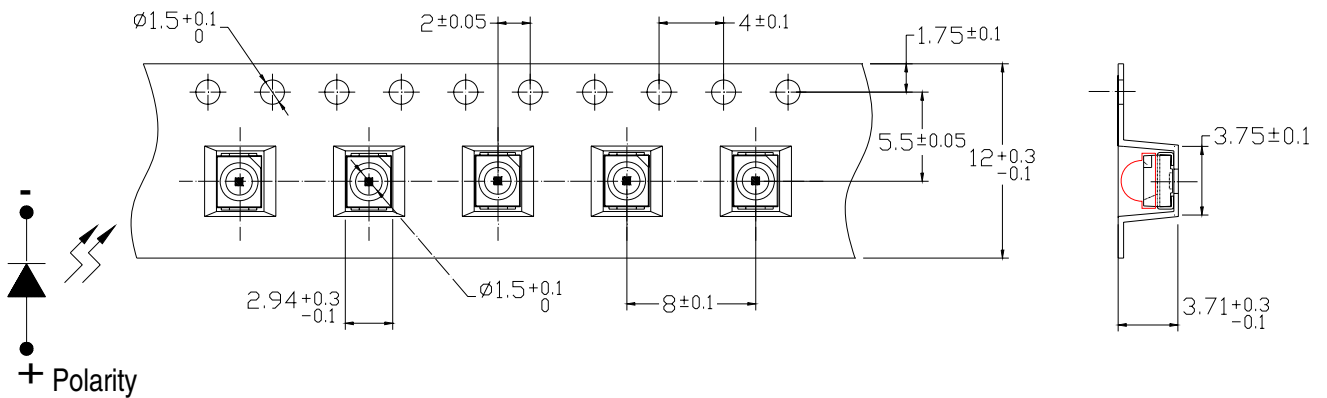

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm Unit = mm

**Moisture Resistant Packaging**

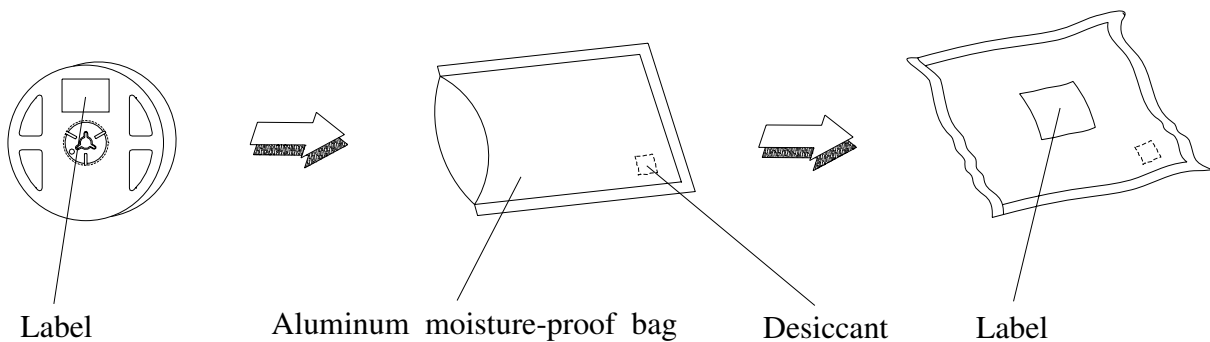



**Technical Data Sheet**
**Top View LEDs**
**67-21B/R6C-AU2W1B/ET**
**Reliability Test Items and Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

| No. | Items                            | Test Condition                                 | Test Hours/Cycles | Sample Size | Ac/Re |
|-----|----------------------------------|--|-------------------|-------------|-------|
| 1   | Reflow Soldering                 | Temp. : 260°C±5°C<br>Max. 10sec.               | 6 Min.            | 22 PCS.     | 0/1   |
| 2   | Temperature Cycle                | H : +100°C 15min<br>∫ 5 min<br>L : -40°C 15min | 300 Cycles        | 22 PCS.     | 0/1   |
| 3   | Thermal Shock                    | H : +100°C 5min<br>∫ 10 sec<br>L : -10°C 5min  | 300 Cycles        | 22 PCS.     | 0/1   |
| 4   | High Temperature Storage         | Temp. : 100°C                                  | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 5   | Low Temperature Storage          | Temp. : -40°C                                  | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 6   | DC Operating Life                | I <sub>F</sub> = 20 mA                         | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 7   | High Temperature / High Humidity | 85°C / 85%RH                                   | 1000 Hrs.         | 22 PCS.     | 0/1   |

## Technical Data Sheet

### Top View LEDs

**67-21B/R6C-AU2W1B/ET**

#### Precautions for Use

##### 1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

##### 2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life are 72 hours under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

##### 3. Soldering Condition

##### 3.1 Pb-free solder temperature profile

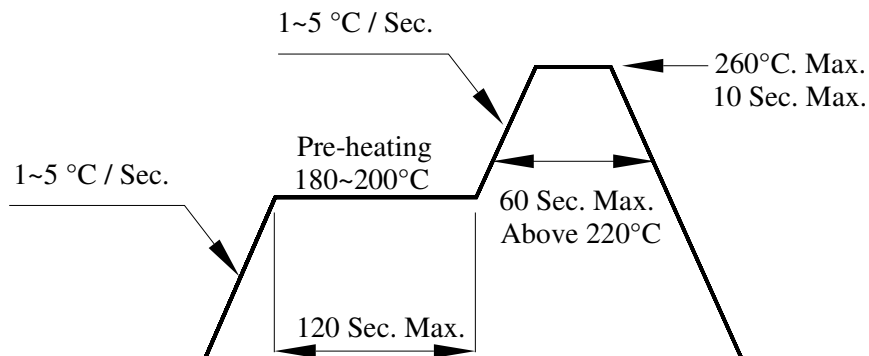

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

## Technical Data Sheet

### Top View LEDs


#### 67-21B/R6C-AU2W1B/ET

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

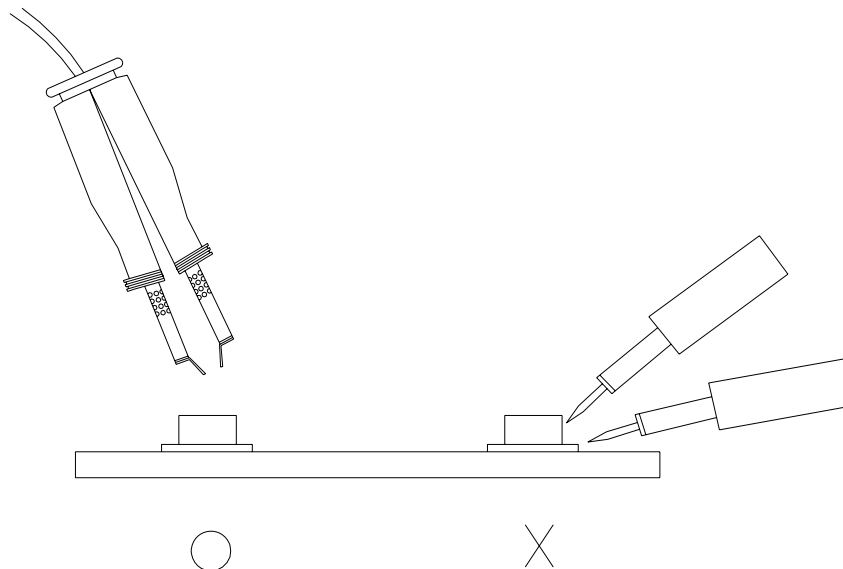

**EVERLIGHT ELECTRONICS CO., LTD.**

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>