

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










Model 6718

Dual Output, 75 Ohm BNC Circuit Board Mount, White Valox Case

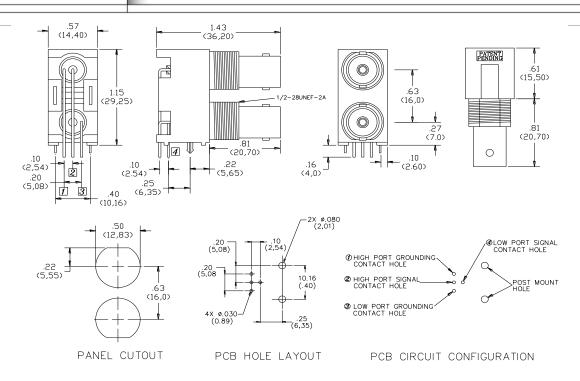

Materials

Case: White Vaolox
BNC Body: Nickel Plated Brass
Center Contact Pin: Gold Plated Brass

Center Contact Socket: Gold Plated Phosphor Bronze Insulator: Polybutylene Terephthalate

Ratings

Impedance:75 OhmFrequency:0 - 1 GHzVSWR:1.30 max

Contact Resistance: 3 Milliohms max.

Voltage: * 500 V

Insulation Resistance: 5000 Megohms min.

Insertions: 500

Temperature: $-40^{\circ}\text{C to } +85^{\circ}\text{C } (-40^{\circ}\text{F to } +185^{\circ}\text{F})$

Shock: 50 G

Vibration: 20 G from 80 to 2000 Hz

USA: Sales: 800-490-2361


Technical Support: technicalsupport@pomonatest.com


Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.





^{*} Maximum voltage for *hands free use* in controlled testing environments. For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vrms / 42.4 Vpk / 60 Vdc, or current exceeds 8A maximum.