

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










Model 6730 Wide Jaw Kelvin Lead Set

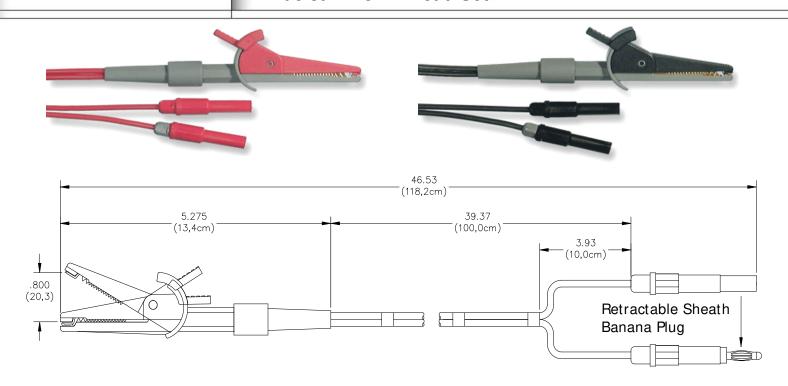

Features

- True wire four wire lead set with gold plated alligator clips that open to a wide .800" (20.3mm).
- Long leads, over 46" (188 cm).
- Standard banana plugs with retractable sheath allows versatility in connecting to equipment.
- Color coded for easy source and sense identification.

Materials

Alligator Contacts: Gold Plated Brass

Banana Plugs: Nickel Plated Beryllium Copper

Spring: Stee

Insulation: Nylon 65, Nylon 6, Lucel, PVC

Wire: Silicone

Ratings

Operating Voltage: 33 Vrms / 70 Vdc Max.

Current: 2A Max. Temperature: -10° to +55°C

Ordering Information

Model: 6730

USA: Sales: 800-490-2361

Technical Support: technicalsupport@pomonatest.com

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.