



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model 6733, 6734
Test Lead Wire with Silicone or PVC Insulation

Features

- Same wire as used with the Pomona test leads and patch cords.
- Make your own “Extra Long” test leads, jumpers or patch cords.
- Fits Pomona “Do-It-Yourself” banana plugs and jacks.
- High temperature and voltage ratings.
- Silicone insulation with high wire strand count allows for superb flexibility.
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety.
- Wire will comply with International Safety Standard CAT III, IEC61010-031 requirements when correctly terminated with other components designed to meet CAT III, IEC61010-031 requirements.

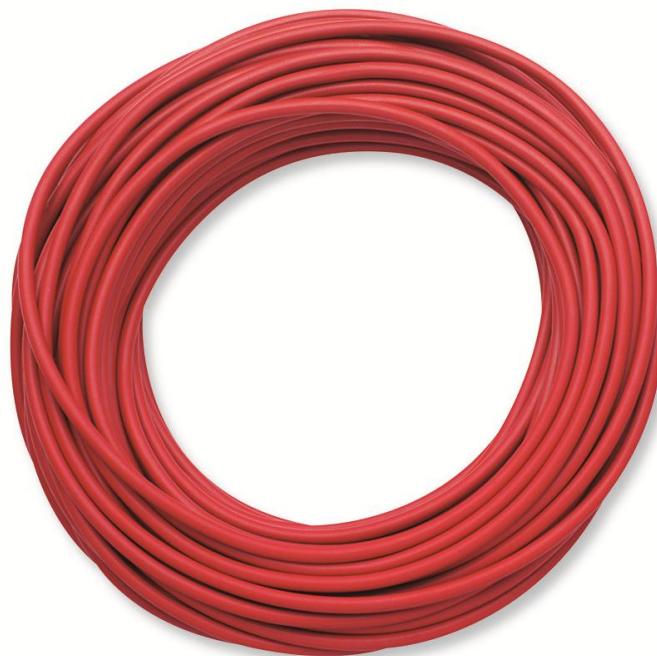

| Specifications: | 6733 | 6734 |
|--|---------------------------------|--------------------------------|
| Insulation: | Silicone | PVC |
| Length: | 50 FT (15,2 meters) | 50 FT (15,2 meters) |
| Wire size: | 18 AWG | 18 AWG |
| Wire: | 192 X 41 bare copper | 65 X 36 tinned copper |
| Diameter (OD): | .144" (3,60mm) | .144" (3,60mm) |
| Temperature: | -58° to +302°F (-50° to +150°C) | -4° to +221°F (-20° to +105°C) |
| Wire Rated Voltage: | 10,000 DC * | 5,000 DC * |
| Current: | 20 A | 15 A |
| Ordering Information: | | |
| Black Wire: | 6733-0 | 6734-0 |
| Red Wire: | 6733-2 | 6734-2 |
| * Hands free testing in controlled voltage environment: <i>For CE compliance:</i> not intended for hand held use at voltages above 30 Vrms / 42.2 Vpk / 60 Vdc or when current exceeds 8A maximum. | | |

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
 Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.