



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# MMR

## Metallized Polyester Film Capacitors

Radial Leaded, Epoxy Dipped




### FEATURES

Small Size - High Voltage - General Purpose

### APPLICATIONS

General Purpose - Bypass - Coupling - Blocking

Operating Temperature Range	<b>-40°C to +105°C</b>				
Capacitance Tolerance	±10% at 1 kHz, 25°C +5% optional				
Peak, AC voltage (50/60 Hz)	WVDC	100	250	400	630
	VAC	63	160	200	220
For T>+85°C, The voltage must be decreased by 1.25% per °C					
Dissipation Factor (MAX) 25°C	Frequency (kHz)	Dissipation Factor			
	1	1.0%			
	10	1.5%			
Insulation Resistance @25°C (<70% RH) for 1 minute at 100VDC applied	Capacitance	Insulation Resistance			
	≤0.33μF	9000 MΩ			
	>0.33μF	3000 MΩ×μF			
Load Life	2000 Hours, +85C with 125% of rated voltage				
	Capacitance Change	≤5% of initially measured value			
	Dissipation Factor	≤0.005 at 1kHz and 25°C			
Damp Heat test	1000 Hours, 93%RH(+/-2%), +40°C and no voltage applied				
	Capacitance Change	≤5% of initially measured value			
	Dissipation Factor	≤0.005 at 1kHz and 25°C			
	Insulation Resistance	≥50% of maximum specified value			
Self Inductance	<1 nano-Henry per mm of body length and lead length				
Capacitance Drift Factor	<1.0% after 2 years at 40°C				
Capacitance Temperature Coefficient	+400 ppm/°C, ±200ppm/°C				
Dielectric Strength	Terminal to Terminal				
	160% of VDC applied for 2 Seconds and 25°C				
Dielectric	Polyester				
Construction	Metallized film				
Coating	Flame Retardant epoxy resin (UL94V0)				
Leads	Lead free tinned copper leads				

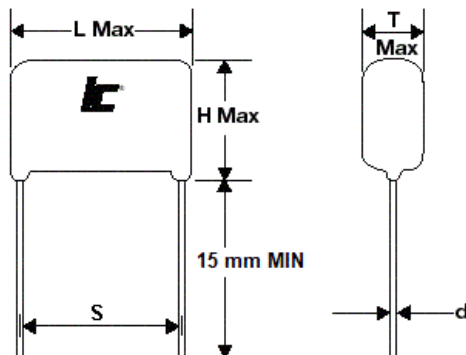

L MAX	10.5	12	18.5	26	31
S±1.0	7.5	10	15	22.5	27.5
G MAX	1.5	1.5	1.5	1.5	1.5
d±0.05	0.6	0.6	0.8	0.8	0.8



Your Global Source for World-Class Capacitors

© 2017 Illinois Capacitor

North America

Tel: 847.675.1760

sales@illcap.com

Asia

Tel: 852.2793 0931

sales@illcap.com.hk



*Your Global Source for World-Class Capacitors*

© 2017 Illinois Capacitor

**North America**

Tel: 847.675.1760

[sales@illcap.com](mailto:sales@illcap.com)

**Asia**

Tel: 852.2793 0931

[sales@illcap.com.hk](mailto:sales@illcap.com.hk)



# MMR

Small Size Epoxy Dipped  
Metallized Polyester Radial  
lead

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims LxHxT (mm)	S (MM)	d (MM)
0.01	250	<a href="#">103MMR250K</a>	80	10.3x7.4x4.3	7.5	0.6
0.01	400	<a href="#">103MMR400K</a>	190	10.3x7.4x4.3	7.5	0.6
0.01	630	<a href="#">103MMR630K</a>	200	12x7.5x4.5	10	0.6
0.015	250	<a href="#">153MMR250K</a>	80	10.3x7.5x4.4	7.5	0.6
0.015	400	<a href="#">153MMR400K</a>	190	10.3x7.5x4.4	7.5	0.6
0.015	630	<a href="#">153MMR630K</a>	200	12x8.2x5	10	0.6
0.022	250	<a href="#">223MMR250K</a>	80	10.3x7.5x4.4	7.5	0.6
0.022	400	<a href="#">223MMR400K</a>	190	10.3x7.9x4.8	7.5	0.6
0.022	630	<a href="#">223MMR630K</a>	200	12x10.5x5.3	10	0.6
0.033	250	<a href="#">333MMR250K</a>	80	10.3x7.5x4.5	7.5	0.6
0.033	400	<a href="#">333MMR400K</a>	190	10.3x9x6	7.5	0.6
0.033	630	<a href="#">333MMR630K</a>	200	12x11.9x6	10	0.6
0.047	250	<a href="#">473MMR250K</a>	80	10.3x7.5x4.5	7.5	0.6
0.047	400	<a href="#">473MMR400K</a>	160	12x8.3x5	10	0.6
0.047	630	<a href="#">473MMR630K</a>	200	12x13.5x6.5	10	0.6
0.068	250	<a href="#">683MMR250K</a>	80	10.3x7.5x4.5	7.5	0.6
0.068	400	<a href="#">683MMR400K</a>	160	12x10.5x5.4	10	0.6
0.068	630	<a href="#">683MMR630K</a>	90	18.5x11x5.8	15	0.8
0.1	250	<a href="#">104MMR250K</a>	80	10.3x8.4x5.8	7.5	0.6
0.1	400	<a href="#">104MMR400K</a>	160	12x12x6.3	10	0.6
0.1	630	<a href="#">104MMR630K</a>	90	18.5x14x6.3	15	0.8
0.15	100	<a href="#">154MMR100K</a>	35	10.3x7.5x4.5	7.5	0.6
0.15	250	<a href="#">154MMR250K</a>	80	10.3x10.8x6	7.5	0.6
0.15	400	<a href="#">154MMR400K</a>	65	18.5x12.4x5	15	0.8
0.15	630	<a href="#">154MMR630K</a>	90	18.5x15.4x7.5	15	0.8
0.22	100	<a href="#">224MMR100K</a>	35	10.3x8x5	7.5	0.6
0.22	250	<a href="#">224MMR250K</a>	110	12x10.5x5.5	10	0.6
0.22	400	<a href="#">224MMR400K</a>	65	18.5x13x5.9	15	0.8
0.22	630	<a href="#">224MMR630K</a>	90	18.5x16.5x9	15	0.8
0.33	100	<a href="#">334MMR100K</a>	35	10.3x10.7x6	7.5	0.6
0.33	250	<a href="#">334MMR250K</a>	110	12x12x6.5	10	0.6
0.33	400	<a href="#">334MMR400K</a>	65	18.5x14.9x7	15	0.8

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims LxHxT (mm)	S (MM)	d (MM)
0.33	630	<a href="#">334MMR630K</a>	35	26x17x7.8	22.5	0.8
0.47	250	<a href="#">474MMR250K</a>	45	18.5x12.5x5.3	15	0.8
0.47	400	<a href="#">474MMR400K</a>	65	18.5x17x7.8	15	0.8
0.47	630	<a href="#">474MMR630K</a>	35	26x18.5x9.3	22.5	0.8
0.68	100	<a href="#">684MMR100K</a>	0	12x13x6	10	0.6
0.68	250	<a href="#">684MMR250K</a>	45	18.5x13.5x6	15	0.8
0.68	400	<a href="#">684MMR400K</a>	30	26x16.5x7	22.5	0.8
0.68	630	<a href="#">684MMR630K</a>	35	26x21x11.5	22.5	0.8
1	100	<a href="#">105MMR100K</a>	30	12x14x6.7	10	0.6
1	250	<a href="#">105MMR250K</a>	45	18.5x15x7.4	15	0.8
1	400	<a href="#">105MMR400K</a>	30	26x18x8.5	22.5	0.8
1	630	<a href="#">105MMR630K</a>	30	31x21.9x12.5	27.5	0.8
1.5	100	<a href="#">155MMR100K</a>	20	18.5x13.4x6	15	0.8
1.5	250	<a href="#">155MMR250K</a>	45	18.5x16.8x9	15	0.8
1.5	400	<a href="#">155MMR400K</a>	25	31x19x9.5	27.5	0.8
1.5	630	<a href="#">155MMR630K</a>	30	31x24.7x15.3	27.5	0.8
2.2	100	<a href="#">225MMR100K</a>	20	18.5x15x7	15	0.8
2.2	250	<a href="#">225MMR250K</a>	20	26x16.3x8.5	22.5	0.8
2.2	400	<a href="#">225MMR400K</a>	25	31x22x11	27.5	0.8
2.2	630	<a href="#">225MMR630K</a>	30	31x29x19.5	27.5	0.8
3.3	100	<a href="#">335MMR100K</a>	20	18.5x16.5x8.5	15	0.8
3.3	250	<a href="#">335MMR250K</a>	20	26x18x10.3	22.5	0.8
4.7	100	<a href="#">475MMR100K</a>	10	26x17x7.5	22.5	0.8
4.7	250	<a href="#">475MMR250K</a>	20	26x21.5x12	22.5	0.8
5.6	100	<a href="#">565MMR100K</a>	10	26x18.5x8.3	22.5	0.8
5.6	250	<a href="#">565MMR250K</a>	15	31x22x11.8	27.5	0.8
6.8	100	<a href="#">685MMR100K</a>	10	26x18.5x9	22.5	0.8
6.8	250	<a href="#">685MMR250K</a>	15	31x22.4x13	27.5	0.8
8.2	100	<a href="#">825MMR100K</a>	10	26x21x10	22.5	0.8
8.2	250	<a href="#">825MMR250K</a>	15	31x24.5x14.3	27.5	0.8
10	100	<a href="#">106MMR100K</a>	10	26x21x11.5	22.5	0.8
10	250	<a href="#">106MMR250K</a>	15	31x25.8x15.9	27.5	0.8