



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Aluminum Polymer Capacitors

High Temperature




FEATURES

Ultra Low ESR – Small Size - High Temperature – High Ripple Current – Stable with Temperature – High Frequency

APPLICATIONS

Industrial Power Supplies – Medical Equipment – Automotive

| | | | | | | | | | | |
|--|--------------|---|----|----------------------------------|------|----|--|--|--|--|
| Operating Temperature Range | | -55°C to +125°C | | | | | | | | |
| Capacitance Tolerance | | +20% at 120 Hz, 20°C | | | | | | | | |
| Surge Voltage | WVDC | 16 | 25 | 35 | 50 | 63 | | | | |
| | SVDC | 1.15 x rated WVDC | | | | | | | | |
| Dissipation Factor 120 Hz, 20°C | | 12% MAX | | | | | | | | |
| Leakage Current | | 2 Minutes | | | | | | | | |
| | | See standard part listing | | | | | | | | |
| Low Temperature Stability Impedance Ratio (120 Hz) | -25°C/ +20°C | ≤1.15 | | | | | | | | |
| | -55°C/ +20°C | ≤1.25 | | | | | | | | |
| Load Life | | 2000 hours(1500 Hours for WVDC \geq 35V) at 125°C with rated WVDC and ripple current applied | | | | | | | | |
| | | Capacitance Change | | <30% of initial measured value | | | | | | |
| | | Dissipation Factor | | <300% of maximum specified value | | | | | | |
| | | ESR | | <300% of maximum specified value | | | | | | |
| | | Leakage Current | | <100% of maximum specified value | | | | | | |
| Humidity test | | 1000 hours at 60°C with rated voltage applied at 90-95% R.H. | | | | | | | | |
| | | Capacitance Change | | <30% of initial measured value | | | | | | |
| | | Dissipation Factor | | <300% of maximum specified value | | | | | | |
| | | ESR | | <300% of maximum specified value | | | | | | |
| | | Leakage Current | | <100% of maximum specified value | | | | | | |
| Surge Voltage test | | 1000 cycles at 125°C with rated surge voltage applied for 30 seconds through a 1kΩ resistor and discharged for 5 minutes and 30 seconds | | | | | | | | |
| | | Capacitance Change | | <20% of initial measured value | | | | | | |
| | | Dissipation Factor | | <150% of maximum specified value | | | | | | |
| | | ESR | | <150% of maximum specified value | | | | | | |
| | | Leakage Current | | <100% of maximum specified value | | | | | | |
| Failure Rate | | 0.5% /1000 hours Maximum (60% confidence level at 125°C) | | | | | | | | |
| Ripple Current Multipliers | | Frequency (Hz) | | | | | | | | |
| | | 120 | 1k | 10k | 100k | | | | | |
| | | .05 | .3 | .7 | 1.0 | | | | | |

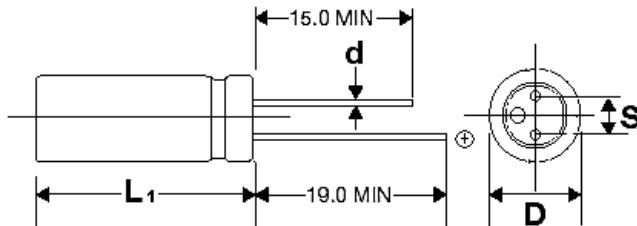

| | | |
|-------|-----|-----|
| D+0.5 | 8 | 10 |
| S+0.5 | 3.5 | 5.0 |
| d | 0.6 | 0.6 |

L₁=L+1.5mm MAX

ILLINOIS CAPACITOR

Your Global Source for World-Class Capacitors

© 2017 Illinois Capacitor

North America

Tel: 847.675.1760

sales@illcap.com

Asia

Tel: 852.2793 0931

sales@illcap.com.hk

Feb-17

ALG

+125°C Highest capacitance &
Voltage, Low ESR

| Capacitance (μ F) | WVDC | IC PART NUMBER | Maximum ESR (Ω) 120 Hz, +20°C | Maximum ESR (m Ω) 100 kHz, +20°C | Leakage Current (μ A) | Maximum RMS Ripple Current (mA) 100 kHz, +105°C | Dims DxL (mm) |
|---------------------------|------|-------------------------------|---|---|----------------------------------|---|------------------|
| 47 | 50 | 476ALG050MFBJ | 4.2328 | 27 | 470 | 2700 | 8x12 |
| 47 | 63 | 476ALG063MFBJ | 4.2328 | 27 | 592 | 2700 | 8x12 |
| 82 | 50 | 826ALG050MFBJ | 2.4261 | 27 | 820 | 2700 | 8x12 |
| 82 | 63 | 826ALG063MGBJ | 2.4261 | 25 | 1033 | 2900 | 10x12 |
| 100 | 35 | 107ALG035MFBJ | 1.9894 | 23 | 700 | 3400 | 8x12 |
| 100 | 50 | 107ALG050MFBJ | 1.9894 | 27 | 1000 | 2700 | 8x12 |
| 100 | 63 | 107ALG063MFBJ | 1.9894 | 27 | 1260 | 2700 | 8x12 |
| 120 | 50 | 127ALG050MGBJ | 1.6579 | 25 | 1200 | 3100 | 10x12 |
| 150 | 35 | 157ALG035MFBJ | 1.3263 | 23 | 1050 | 3400 | 8x12 |
| 150 | 63 | 157ALG063MGBJ | 1.3253 | 25 | 1890 | 2900 | 10x12 |
| 220 | 25 | 227ALG025MFBJ | 0.9043 | 16 | 1350 | 4750 | 8x12 |
| 220 | 35 | 227ALG035MGBJ | 0.9043 | 23 | 1540 | 3400 | 8x12 |
| 220 | 50 | 227ALG050MGBJ | 0.9043 | 21 | 1540 | 3900 | 10x12 |
| 330 | 35 | 337ALG035MGBJ | 0.6029 | 21 | 2310 | 3900 | 10x12 |
| 470 | 16 | 477ALG016MFBJ | 0.42328 | 11 | 1504 | 5100 | 8x12 |
| 470 | 25 | 477ALG025MFBJ | 0.42328 | 16 | 2350 | 4750 | 8x12 |
| 470 | 25 | 477ALG025MGBJ | 0.42328 | 14 | 2350 | 5050 | 10x12 |
| 680 | 25 | 687ALG025MGBJ | 0.2926 | 14 | 3400 | 5050 | 10x12 |
| 820 | 16 | 827ALG016MFBF | 0.24261 | 11 | 2624 | 5100 | 8x12 |
| 1200 | 16 | 128ALG016MGBJ | 0.16579 | 11 | 3840 | 6100 | 10x12 |
| 1500 | 16 | 158ALG016MGBJ | 0.13253 | 11 | 4800 | 6100 | 10x12 |

ILLINOIS CAPACITOR

Your Global Source for World-Class Capacitors

© 2016 Illinois Capacitor

North America
Tel: 847.675.1760
sales@illcap.com

Asia
Tel: 852.2793.0931
sales@illcap.com.hk