



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




**Models 6883, 6884
Dual Binding Posts with Base (raised base)**



Model 6883 Dual Binding Posts



Model 6884 Dual Binding Posts with Raised Base

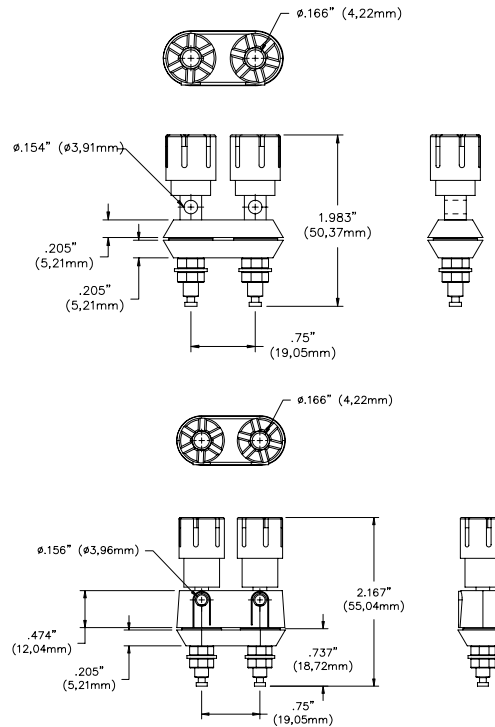

Use as an ideal interconnect

Features

- 5-way binding post with 0.154" cross-hole that accepts up to 12 AWG wire and standard banana plugs.
- Posts are spaced at the standard 3/4" inch spacing to mate to dual banana plugs.
- 30 A current rating.

Materials

- Posts are made of nickel-plated brass.
- Insulators and base are made of nylon.

Ordering Information

Model: 6883, 6884

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

Specifications

Current rating	30 A at low voltage
Voltage rating	500 V dc at low current
Wire gauge	Up to 12 AWG
Operating temperature	Up to 70 °C

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.