



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## SPECIFICATION CONTROL DRAWING

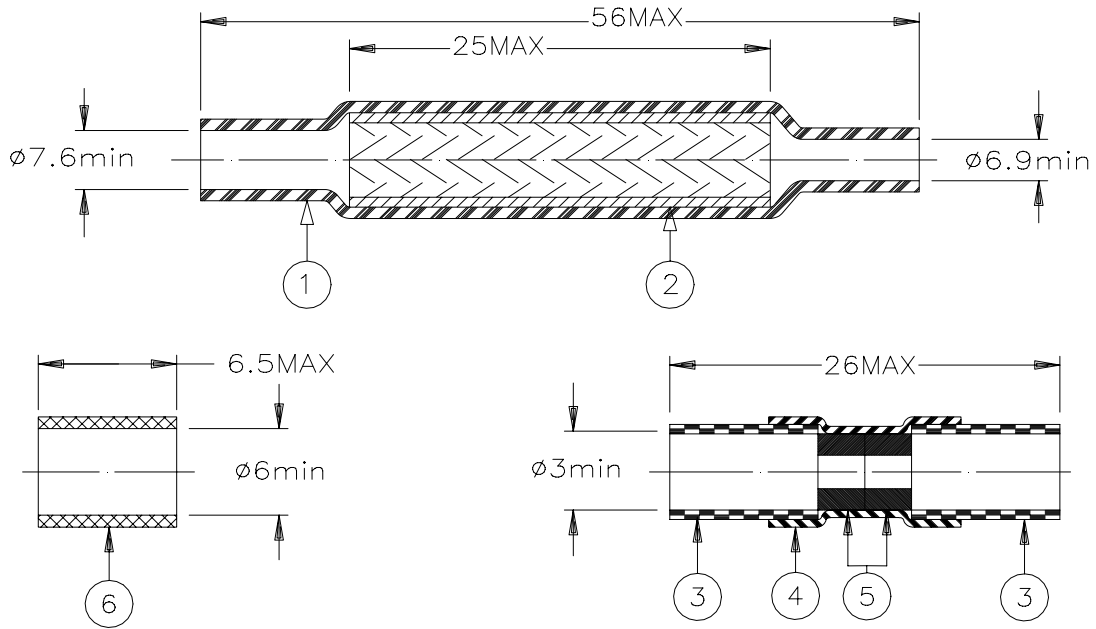


**MATERIAL**

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear.
2. SOLDERSHIELD DEVICE: Tin plated copper braid with flux.
3. DIELECTRIC BARRIER: Cross-linked polyvinylidene fluoride. Color: yellow.
4. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
5. SOLDER PREFORM WITH FLUX:  
 SOLDER: TYPE Sn63 per ANSI J-STD-006.  
 FLUX: TYPE ROL1 per ANSI J-STD-004.
6. INSULATION TUBING: Precoated, radiation cross-linked modified polyolefin with adhesive. Color: black.

**APPLICATION**

1. This controlled soldering device is designed to splice the center conductor and the braid, both made of bare tin or silver plated copper, of coaxial cables having an insulation temperature rated for at least +85°C. The product is suitable for single or double braided cables.
2. Temperature range: -55°C to +125°C.
3. For installation procedure: See RPIP-699-00.

**Cable Dimensions:**

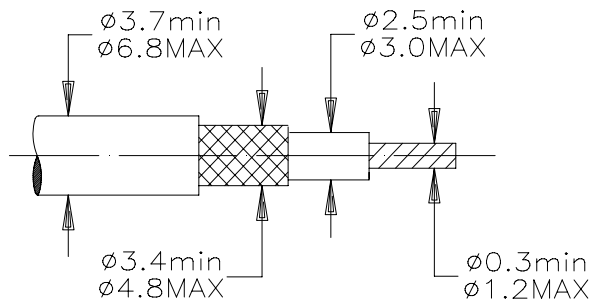

\*A trademark of Tyco Corporation.

<b>tyco</b> <i>Electronics</i>		Tyco Electronics Corporation 305 Constitutional Drive Menlo Park, CA 94025 USA		<b>RAYCHEM</b> Products		TITLE: <b>COAXIAL CABLE SPLICE KIT</b>					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.						DOCUMENT NO.: <b>B-202-81</b>					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A		Tyco reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DATE: Sept. 17, 1998		DOC ISSUE: 2			
		ROUGHNESS IN MICRON				DRAWN BY: R. MAPALO		REPLACES: B20281		DCR NUMBER: D981685	
				PROD. REV.: A		SCALE: NONE		SIZE: A		SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.