



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Part Number: **6LF22XWA**


(Replaces Panasonic part number 6LR61XWA)

Alkaline-Zinc/Manganese Dioxide



Industry Standard Dimensions mm (inches)

Dimensions Comply with ANSI and IEC Standards

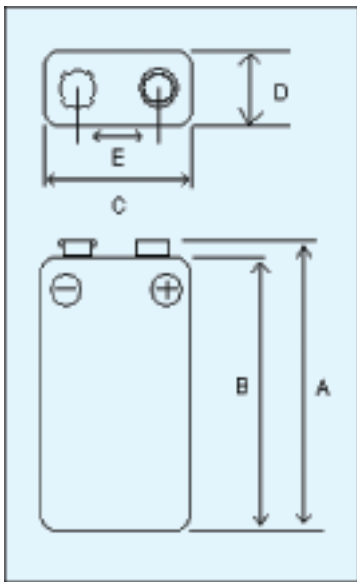

	Max. inch	Min. inch
A	1.909	1.831
B	1.827	-
C	1.043	.965
D	.689	.610
E	.510	.490

Specifications

Chemical System:	Alkaline-Zinc/Manganese Dioxide (Zn/MnO ₂)
Designation:	ANSI 1604A, IEC 6LR61
Nominal Voltage:	9.0V
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
Typical Weight:	45 grams (1.6 oz.)
Typical Volume:	22.8 cm ³ (1.39 in. ³)
Terminals:	Snap
Shelf Life:	5 years (85% Capacity)
Heavy Metals Content:	No added Mercury, Cadmium or Lead

Batteries for every application and industry including:

- Medical
- Hotel/Motel/Restaurant
- Transportation
- Communications
- Government/Municipality
- HVAC
- Contractors
- Janitorial/Sanitation
- Power Plants
- Manufacturing
- Military/Defense
- Security

Important Notice: This data sheet contains typical information specific to products manufactured at the time of its publication.




Photos represent typical industrial applications but may or may not match the battery size on this data sheet.


Part Number: 6LF22XWA (Replaces Panasonic part number 6LR61XWA)

Alkaline-Zinc/Manganese Dioxide


Typical Discharge Characteristics with Constant Current at 20°C

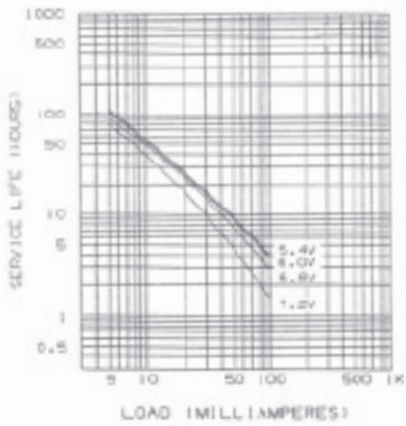




Typical Discharge Characteristics with Constant Resistance at 20°C

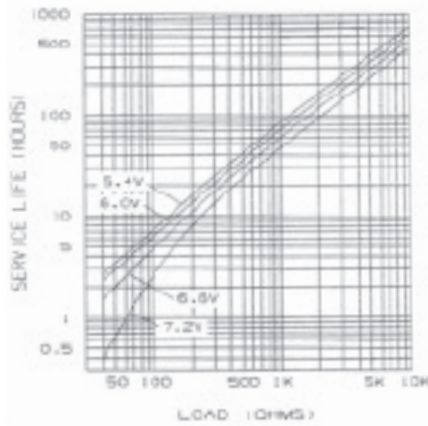

Typical Temperature Characteristics 5.4 Volts Cutoff Voltage

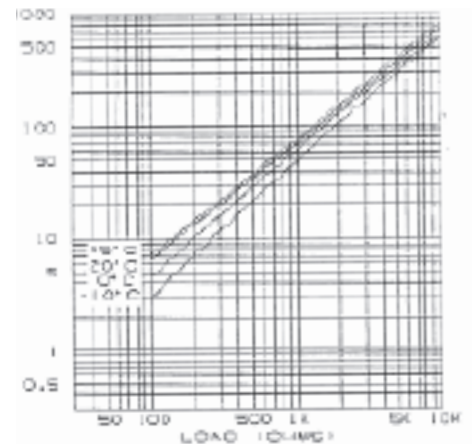

IEC/ANSI Standard Tests @ 20°C

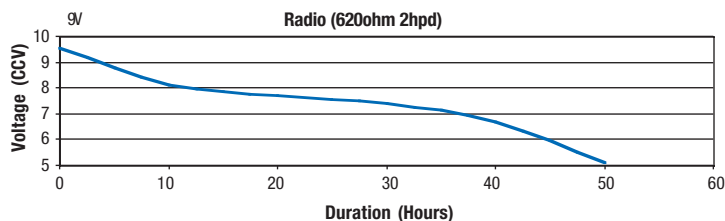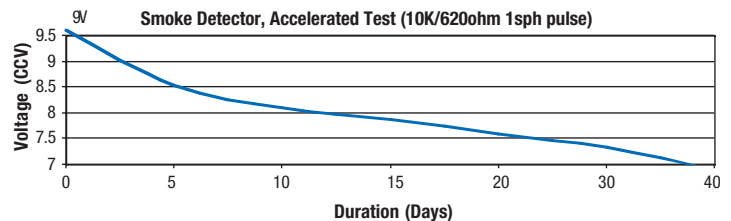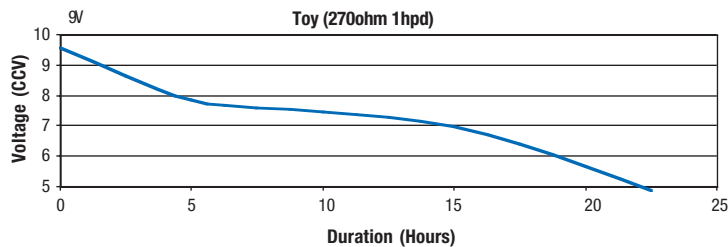

This information is generally typical and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Cell/battery performance and service life depends on the operating temperature, cut-off voltage and load applied to cell/battery in a specific application. It is the responsibility of each user to ensure that each cell/battery application is adequately designed safe and compatible with all conditions encountered during use and in conformance with existing standards and requirements. Contact Panasonic for the latest information.

©2015 Panasonic Industrial Devices Sales Company of America All rights reserved. All reproductions prohibited without proper authorization. Characteristics and specifications subject to change without prior notification.