



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

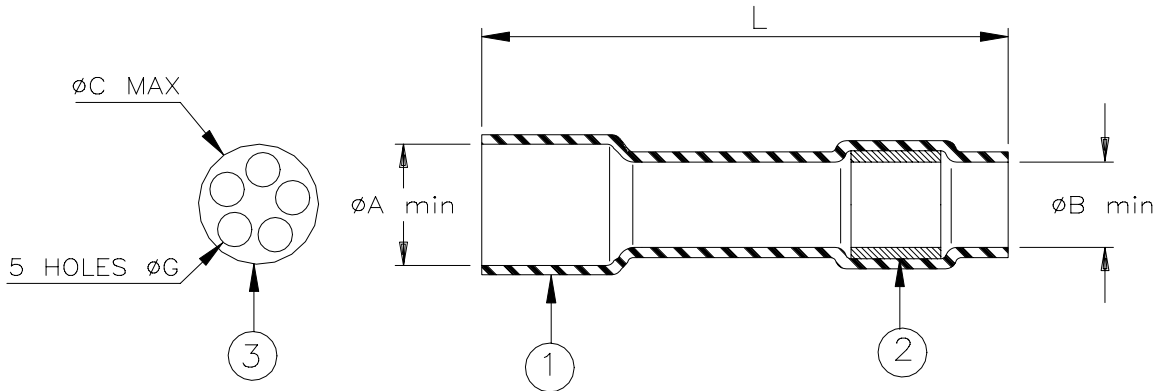

Product Revision		Product Dimensions				
Product Name		L ±1.5 (L±0.06)	øA min	øB min	øC max	øG min
D-436-0106	B	28.0 (1.100)	8.30 (0.325)	6.90 (0.270)	8.05 (0.316)	2.20 (0.088)


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. MELTABLE INSERT: Low outgassing immersion resistant thermoplastic. Color: clear.
3. MULTI-HOLE INSERT: Low outgassing immersion resistant thermoplastic. Color: clear.

APPLICATION

1. This part is designed to provide an immersion resistant seal floating shields of multi-conductor cables containing up to 5 wires having an insulation less than $\phi 2.15$ ($\phi 0.085$) or up to 10 wires (2 per hole) with insulation less than $\phi 1.12$ (0.045). The diameter of the shielded cable jacket or the single wire in the splice shall not be less than 3.2 (0.125).
2. Temperature range: -55°C to +175°C (with excursion to 200°C). Parts may be installed by convection heating.

For best results, prepare the cable as shown:

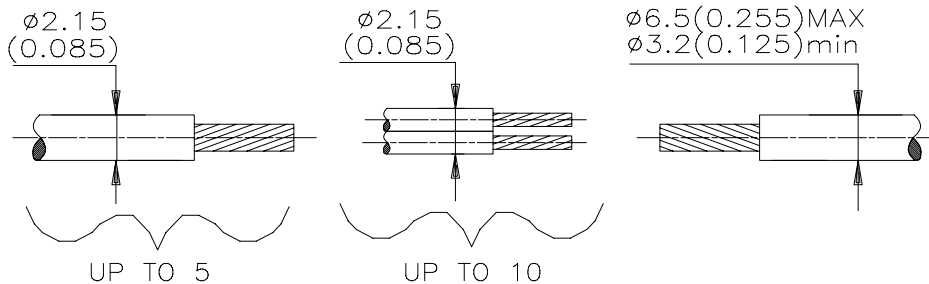

* A trademark of Raychem Corporation.

Raychem		THERMOFIT DEVICES		Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		TITLE: MULTI-CONDUCTOR SEALING SLEEVE, LOW OUTGASSING				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: D-436-0106				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D981040		REPLACES: D4360106		
		ROUGHNESS IN MICRON				DRAWN BY: M. FORONDA		DATE: 06/23/98		PROD. REV. SEE TABLE
				DOC ISSUE: 1		SCALE: None		SIZE: A		SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision