



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Slimline PCB Relay SNR**

- 1 pole 6A, 1 form C (CO), 1 form A (NO)
- Only 5mm wide
- Flat pack version available
- Sensitive coil 170mW
- Reinforced insulation (protection classII)
- Strong coil pins for DIN-rail socket
- Allows high function- / packaging density
- Cadmium-free contacts, AgNi 90/10 for AC-loads



F0140-D

Typical applications

Interface technology, PLC's, timers, centralized and decentralized heating control



**Approvals**

VDE Cert. No. 40010063, UL E214025  
Technical data of approved types on request

**Contact Data**

Contact arrangement	1 form C (CO) or 1 form A (NO)	
Rated voltage	250VAC	
Max. switching voltage	400VAC	
Rated current	6A	
Limiting making current, max 4s, df 10%	10A	
Breaking capacity max.	1500VA	
Contact material	AgSnO <sub>2</sub> , AgNi 90/10	AgSnO <sub>2</sub> gold plated
Min. recommended contact load	100mA, 12V	50mW
Frequency of operation, with/without load	6/1200min <sup>-1</sup>	
Operate/release time max.	12/5ms	
Bounce time max., form A/form B	3/8ms	

**Contact ratings**

Type	Contact	Load	Cycles
<b>EC 61810</b>			
V23092-****-A301, -A801	C (CO)	6A, 250VAC, cosφ=1, 85°C	5x10 <sup>3</sup>
<b>UL 508</b>			
V23092-****-A301, -A801	A/B	6A, 250VAC, general purpose, 85°C	6x10 <sup>3</sup>
V23092-****-A301, -A801	A/B (NO)	B300, 85°C	6x10 <sup>3</sup>
V23092-****-A301, -A801	A/B	R300, 85°C	6x10 <sup>3</sup>
<b>EN60730-1</b>			
V23092-****-A302	A (NO)	3A (1.5A), 250VAC, 85°C	100x10 <sup>3</sup>
V23092-****-A302, -A802	A (NO)	5A (1.5A), 250VAC, 85°C	10x10 <sup>3</sup>

Mechanical endurance, DC coil 10x10<sup>6</sup> operations

**Coil Data**




Coil voltage range	5 to 60VDC
Operative range, IEC 61810	2

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10% <sup>1)</sup>	Rated power mW
005	5	3.5	0.25	147	170
012	12	8.4	0.6	848	170
024	24	16.8	1.2	3390	170
048	48	33.6	2.4	10600 <sup>1)</sup>	217
060	60	42.0	3.0	20500 <sup>1)</sup>	176

1) Coil resistance ±15%.

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coil voltages on request.

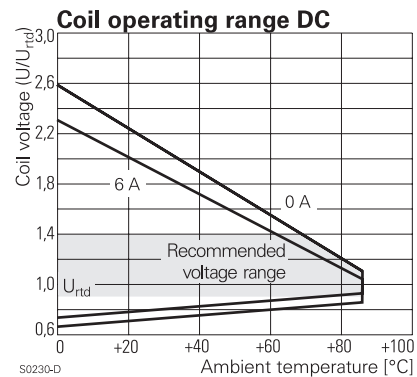

**Insulation Data**

Initial dielectric strength	
between open contacts	1000V <sub>rms</sub>
between contact and coil	4000V <sub>rms</sub>
Clearance/creepage	
between contact and coil	≥6/8mm
Material group of insulation parts	IIIa
Tracking index of relay base	PTI250

**Slimline PCB Relay SNR** (Continued)

**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customersupport/rohssupportcenter](http://www.te.com/customersupport/rohssupportcenter)

Ambient temperature	-40 to +85°C
Category of environmental protection	RTIII - wash tight
IEC 61810	
Vibration resistance (functional), form A (NO) / form B (NC)	10/5g
Shock resistance (functional), form A (NO) / form B (NC)	10/5g
Shock resistance (destructive)	30g
Terminal type	PCB-THT, plug-in
Mounting	PCB, socket
Weight	6g
Resistance to soldering heat THT IEC 60068-2-20	260°C/5s <sup>2)</sup>
Packaging unit	tube/20 pcs., box/1000 pcs.


2) for flat pack version selective soldering is recommended

**Accessories**

For details see datasheet [Accessories Slim Interface Relay SNR](#)


**PCB layout / terminal assignment**

Bottom view on solder pins

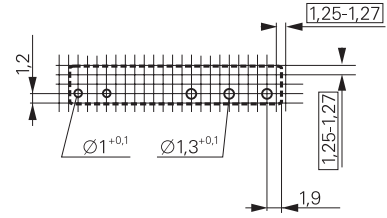


S0258-AA

1 form C contact (1 CO)





S0258-AB

1 form A contact (1 NO)




S0258-AC

**Dimensions**

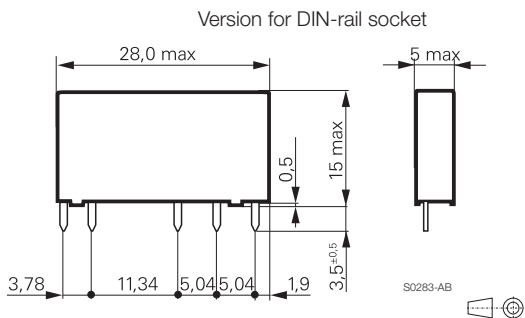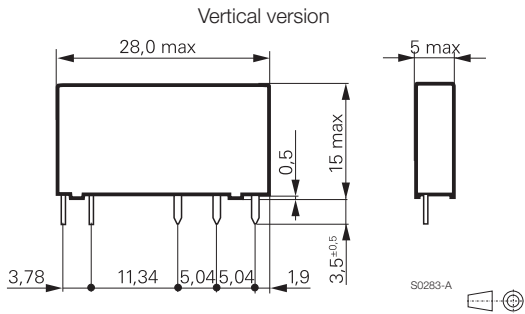

Flat pack version<sup>2)</sup>

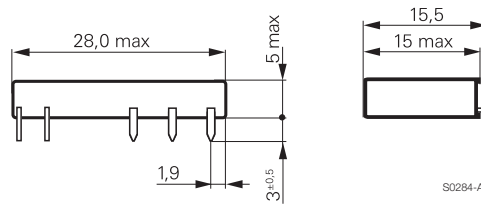

2) for flat pack version selective soldering is recommended



**Slimline PCB Relay SNR** (Continued)

<b>Product code structure</b>	Typical product code	<b>V23092</b>	<b>-A</b>	<b>1</b>	<b>005</b>	<b>-A</b>	<b>3</b>	<b>01</b>
<b>Type</b>	<b>V23092</b> Slimline PCB relay SNR							
<b>Version</b>	<b>A</b> PCB, vertical version		<b>B</b> PCB, flat pack version					
	<b>S</b> Plug-in, vertical version							
<b>Version</b>	<b>1</b> Wash tight							
<b>Coil</b>	Coil code: please refer to coil versions table							
<b>Contact system</b>	<b>A</b> Standard							
<b>Contact material</b>	<b>2</b> AgSnO <sub>2</sub> , gold plated		<b>3</b> AgSnO <sub>2</sub>					
	<b>8</b> AgNi 90/10							
<b>Contact configuration</b>	<b>01</b> 1 form C contact (1 CO)				<b>02</b> 1 form A contact (1 NO)			

NO version with 8/8mm clearance and creepage and other types on request

Product code	Version	Contact arrangement	Contact material	Coil	Part number
V23092-A1005-A201	PCB	1 form C (CO) contact	AgSnO <sub>2</sub> , gold plated	5VDC	1393236-1
V23092-A1005-A202	vertical version	1 form A (NO) contact			8-1415067-1
V23092-A1005-A301	wash tight	1 form C (CO) contact	AgSnO <sub>2</sub>		1393236-2
V23092-A1005-A302		1 form A (NO) contact			9-1415067-1
V23092-A1005-A801		1 form C (CO) contact	AgNi 90/10		1-1415068-1
V23092-A1005-A802		1 form A (NO) contact			1415068-1
V23092-A1012-A201		1 form C (CO) contact	AgSnO <sub>2</sub> , gold plated	12VDC	1393236-4
V23092-A1012-A202		1 form A (NO) contact			1393236-5
V23092-A1012-A301		1 form C (CO) contact	AgSnO <sub>2</sub>		1393236-7
V23092-A1012-A302		1 form A (NO) contact			1393236-8
V23092-A1012-A801		1 form C (CO) contact	AgNi 90/10		1-1393236-3
V23092-A1012-A802		1 form A (NO) contact			2-1415068-1
V23092-A1024-A201		1 form C (CO) contact	AgSnO <sub>2</sub> , gold plated	24VDC	2-1393236-1
V23092-A1024-A202		1 form A (NO) contact			2-1393236-2
V23092-A1024-A301		1 form C (CO) contact	AgSnO <sub>2</sub>		2-1393236-4
V23092-A1024-A302		1 form A (NO) contact			2-1393236-5
V23092-A1024-A801		1 form C (CO) contact	AgNi 90/10		3-1393236-0
V23092-A1024-A802		1 form A (NO) contact			5-1415063-1
V23092-A1048-A201		1 form C (CO) contact	AgSnO <sub>2</sub> , gold plated	48VDC	3-1393236-5
V23092-A1048-A202		1 form A (NO) contact			3-1393236-6
V23092-A1048-A301		1 form C (CO) contact	AgSnO <sub>2</sub>		3-1393236-7
V23092-A1048-A302		1 form A (NO) contact			3-1393236-8
V23092-A1048-A801		1 form C (CO) contact	AgNi 90/10		3-1393236-9
V23092-A1048-A802		1 form A (NO) contact			3-1415068-1
V23092-S1005-A201	Plug-in	1 form C (CO) contact	AgSnO <sub>2</sub> , gold plated	5VDC	1956024-9
V23092-S1005-A301	vertical version		AgSnO <sub>2</sub>		1-1956024-0
V23092-S1012-A201	wash tight		AgSnO <sub>2</sub> , gold plated	12VDC	1956024-1
V23092-S1012-A301			AgSnO <sub>2</sub>		1956024-2
V23092-S1024-A201			AgSnO <sub>2</sub> , gold plated	24VDC	1956024-3
V23092-S1024-A301			AgSnO <sub>2</sub>		1956024-4
V23092-S1048-A201			AgSnO <sub>2</sub> , gold plated	48VDC	1956024-5
V23092-S1048-A301			AgSnO <sub>2</sub>		1956024-6
V23092-S1060-A201			AgSnO <sub>2</sub> , gold plated	60VDC	1956024-7
V23092-S1060-A301			AgSnO <sub>2</sub>		1956024-8