



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# 50-165 Watts NTQ160 Series

**Total Power:** 50-165 Watts  
**Input Voltage:** 85-264 VAC  
**# of Outputs:** Quad



## Special Features

- Active power factor correction
- EN61000-3-2 compliance
- Remote sense on outputs one and two
- Power fail and remote inhibit
- 5V Standby output
- DC Power good
- Single wire current sharing on outputs one and two
- Wide range adjustable on outputs 1 & 2
- Built-in Class B EMI filter
- Overvoltage protection
- Overload protection
- Thermal overload protection
- Outputs 3 & 4 are floating

## Environmental

Operating temperature: 0° to 50°C ambient; derate each output at 2.5% per degree from 50° to 70°C

Electromagnetic susceptibility: Designed to meet EN61000-4, -2, -3, -4, -5, -6, -8, -11 Level 3

Humidity: Operating; non-condensing 10% to 95%

Vibration: Three orthogonal axes, sweep at 1 oct/min, 5 min. dwell at four major resonances 0.7 G peak 5 Hz to 500 Hz, operational

Storage temperature: -40° to 85°C

Temperature coefficient: ± .04% per °C

MTBF demonstrated: >1 million hours at full load and 25°C ambient conditions

## Electrical Specs

### Input

Input range	85-264 VAC
Frequency	47-63 Hz
Inrush current	38 A max., cold start @ 25°C
Efficiency	65% typical at full load @ 115 VAC input
EMI filter	FCC Class B conducted and radiated, CISPR22 Class B conducted and radiated, EN55022 Class B conducted and radiated, VDE0878 PT3 Class B conducted and radiated.
Power factor	0.99 typical
Safety ground leakage current	<1 mA @ 50/60 Hz, 264 VAC input

### Output

Maximum power	50W convection, 165 W with 30 CFM forced air
Adjustment range	1.8V - 3.5V; 3.0V - 5.5V on outputs one and two
Hold-up time	20 ms @ 165 W load
Overload protection	Short circuit protection on all outputs. Case overload protected @ 110-145% above peak rating. Latching type recycle AC to reset.
Overvoltage protection	Tracks outputs 1 & 2: 20% to 35% above output setting
Standby output	5V @ 2 A regulated ±5%

### Logic Control

Power failure	TTL logic signal goes high 100-500 msec after V1 output; it goes low at least 4 msec before loss of regulation
Remote Inhibit	Requires contact closure to inhibit outputs
Remote sense	Compensates for 0.5 V lead drop minimum, will operate without remote sense connected. Reverse connection protection.
DCO	TTL logic signal goes high after main output is in regulation. It goes low when there is a loss of regulation.

## Safety

<b>VDE</b>	0805/EN60950 (IEC950)	21310-3336-0021 (129066)
<b>UL</b>	UL1950	E186249
<b>CSA</b>	CSA 22.2-234 Level 3	LR109492C
<b>NEMKO</b>	EN 60950/EMKO-TUE (74-sec) 203	P00100493
<b>BABT</b>	EN60950/EN41003	650251, NC/00069
<b>CB</b>	Certificate and report	9661, 9662, 8788
<b>CE</b>	Mark (LVD)	

rev 04.29.04

Support: (888) 41-ASTEC or (407) 241-2752

Americas: (760) 930-4600

Europe (UK) 44 (1384) 842-211

Asia (HK) 852-2437-9662



AMERICAS

5810 Van Allen Way  
 Carlsbad, CA 92008  
 Telephone: 760-930-4600  
 Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX, UK  
 Telephone: 44 (1384) 842-211  
 Facsimile: 44 (1384) 843-355

ASA

Units 2111-2116, Level 21  
 Tower 1, Metroplaza  
 223, Hing Fong Road  
 Fwai Fong, New Territories  
 Hong Kong  
 Telephone: 852-2437-9662  
 Facsimile: 852-2402-4426



## Ordering Information

Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Maximum Load with 30 CFM Forced Air	Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P (PARD) <sup>3</sup>
NTQ162	+3.3 V (1.8 - 3.5V)	2 A	15 A	30 A	38 A	±2%	50 mV
	+5 V (3 - 5.5V)	0 A	10 A	20 A	22 A	±2%	50 mV
	12 V*	0 A	2 A	4.5 A	5 A	±3%	120 mV
	12 V*	0 A	2 A	4.5 A	5 A	±3%	120 mV
NTQ163	+5 V (3 - 5.5V)	2 A	15 A	30 A	32 A	±2%	50 mV
	+3.3 V (1.8 - 3.5V)	0 A	10 A	20 A	22 A	±2%	50 mV
	12 V*	0 A	2 A	4.5 A	5 A	±3%	120 mV
	12 V*	0 A	2 A	4.5 A	5 A	±3%	120 mV
NTQ165	+3.3 V (3 - 5.5V)	2 A	15 A	30 A	32 A	±2%	50 mV
	+2.5 V (1.8 - 3.5V)	0 A	10 A	20 A	22 A	±2%	50 mV
	5 V*	0 A	2 A	4 A	5 A	±3%	120 mV
	12 V*	0 A	2 A	4 A	5 A	±3%	120 mV

\* outputs are floating

1. Peak current lasting <30 seconds with a maximum 10% duty cycle.
2. At 25°C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.
4. Minimum loads are required. In parallel minimum loads are 2.5 A on the V1 output and 1 A on the V2 output for each power supply.
5. Total output current between V1 and V2 is 40A maximum.

## Ordering Information

Connector

<b>SK1</b>	PIN 1	Ground
	PIN 3	Neutral
	PIN 5	Live
<b>SK2</b>		V1
<b>SK3</b>		Common
<b>SK4</b>		V2
<b>SK6</b>	PIN 1	V4 Common
	PIN 2	V4
	PIN 3	V3 Common
	PIN 4	V3
<b>SK5</b>	PIN 1	V2 SWP
	PIN 2	5V Standby
	PIN 3	+V2 Sense
	PIN 4	V1 SWP
	PIN 5	COMMON
	PIN 6	+V1 Sense
	PIN 7	Sense COMMON
	PIN 8	Remote Inhibit
	PIN 9	DC Power Good
	PIN 10	Power Fail


Mating Connectors

(SK1) AC Input: Molex: 09-50-8051 (USA)  
 Molex: 09-91-0500 (UK)  
 PINS: 08-58-0111  
 SK2,3,4: Molex BB-124-08

(SK6) ±12V Molex:09-50-8041 (USA)  
 Molex: 09-91-0400 (UK)  
 PINS: 08-58-0111




(SK5) Control Signals: Molex: 90142-0010  
 PINS: 90119-2110  
 or  
 Amp: 87977-3  
 PINS: 87309-8

Astec Connector Kit #70-841-014, includes all of the above

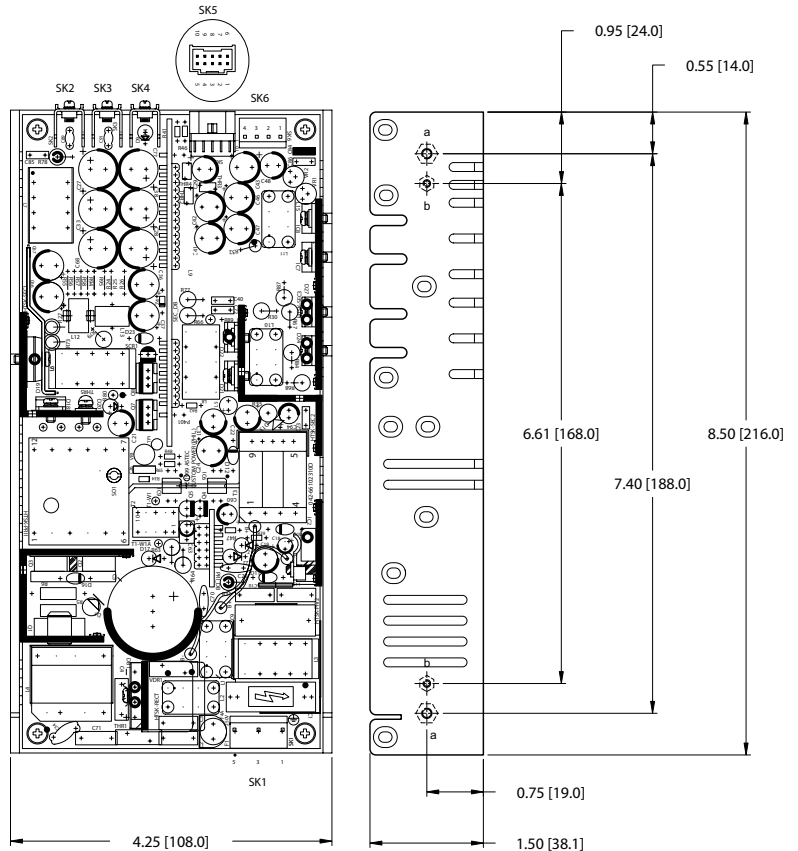

Notes:

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance ±.02".
3. Remote inhibit requires an external contact closure to activate
4. Mounting maximum insertion depth is 0.12".
5. Warranty: 1 year
6. Weight: 2.38 lb. /1.08 kg

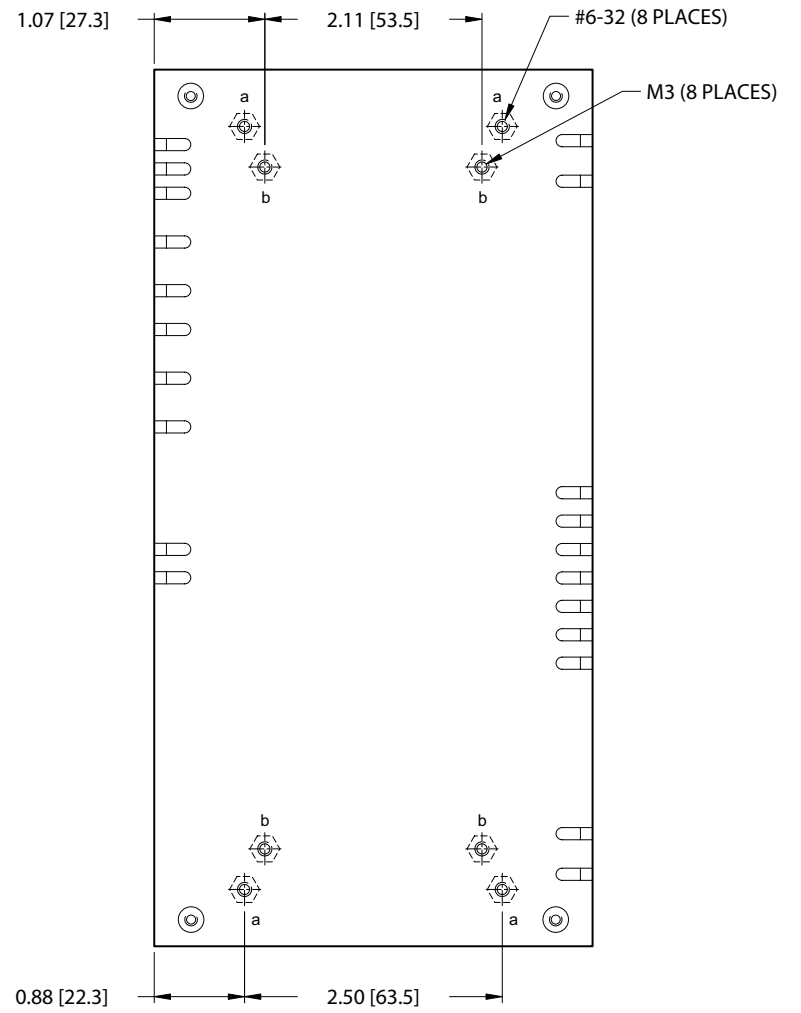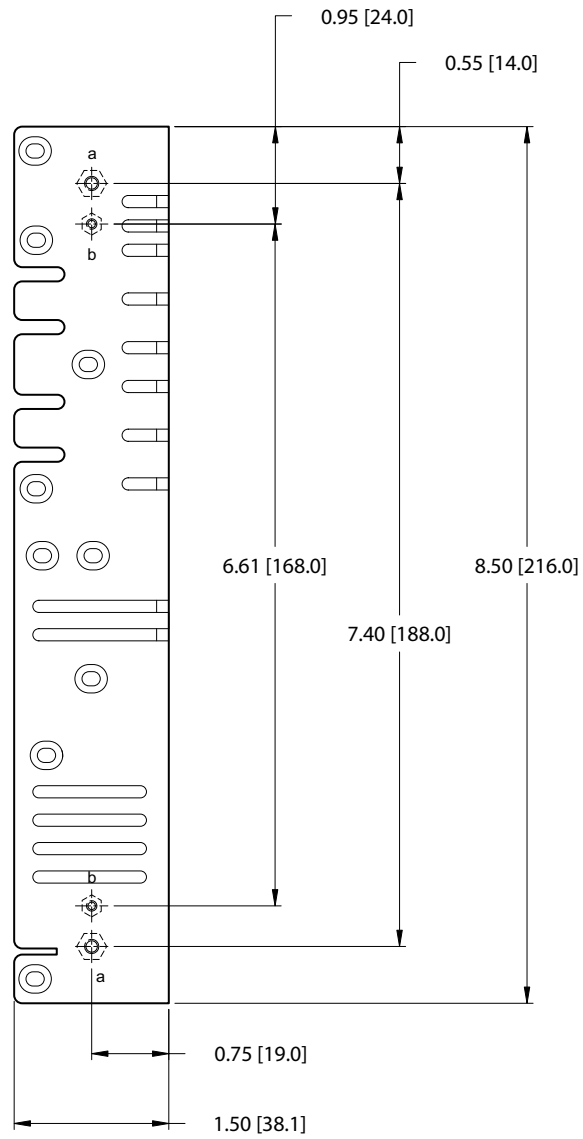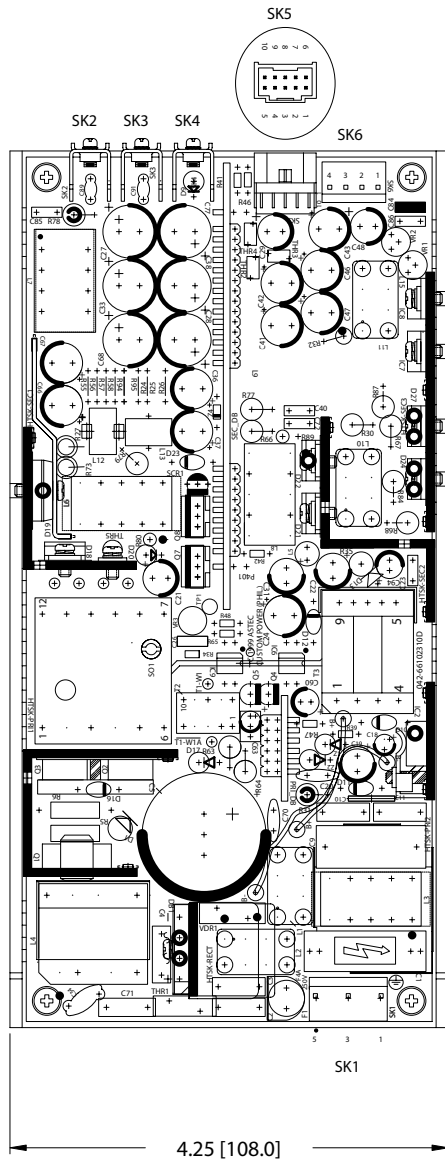

**NTQ160 Series**