



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





NETWORK SERIAL
CONCENTRATOR



ETHERLITE®

Cost-effective serial concentrator designed for applications requiring serial port connectivity over an Ethernet network

The EtherLite family of network serial concentrators adds serial ports to an Ethernet network, eliminating the installation of serial adapters inside servers. It offers easy installation and network efficiency and control at a low price per port.

A single TCP/IP session services the traffic from all ports, unlike the conventional one-session-per-port method. This means less overhead at the host and less traffic on the Ethernet. With Digi's patented RealPort® drivers, the EtherLite ports appear as local TTY ports under UNIX® and as native COM ports under Microsoft® Windows®. These locally administered ports allow full control of serial ports.

Available in two- to 32-port models, the EtherLite can be used in numerous applications including retail/POS, process control, data collection and console management of clusters, routers, hubs, switches, PBXs and other networking devices with console ports.


BENEFITS

- 2, 8, 16 or 32 asynchronous serial ports
- Minimizes Ethernet traffic by multiplexing all serial ports into a single TCP/IP session
- Patented RealPort drivers for UNIX, Linux and Windows
- Delivers real serial ports, without Telnet, Rlogin, Reverse Telnet or other complex networking overhead
- Full support for hardware signaling
- RS-232/422 switchable model available

RELATED PRODUCTS



APPLICATION EXAMPLE

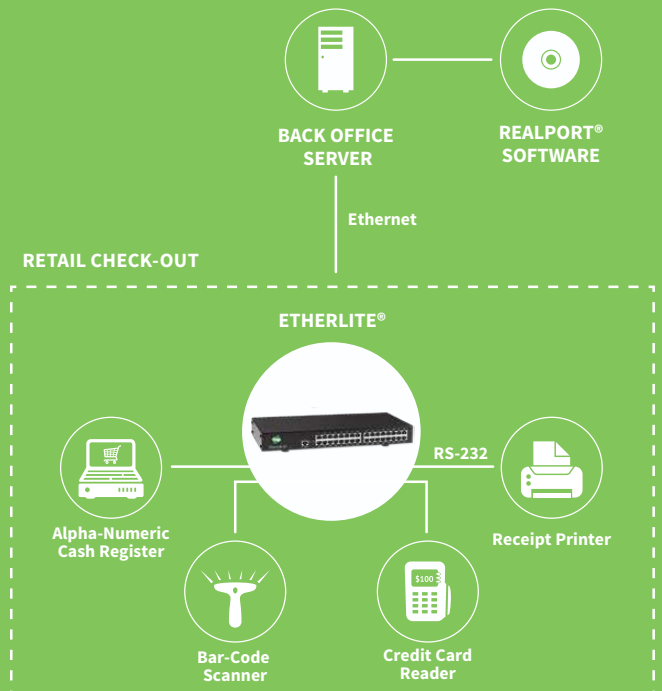

SPECIFICATIONS

EtherLite® 2

| EtherLite® 80

| EtherLite® 160/162

| EtherLite® 32

FEATURES

MANAGEMENT	DHCP		
SOFTWARE	Device-initiated patented RealPort® COM port redirector		
STATUS LEDS	Link, Power		
DIMENSIONS (L X W X D)	6.3 in x 1.2 in x 3.8 in (16.0 cm x 2.9 cm x 9.5 cm)	11.5 in x 1.2 in x 5.4 in (29.3 cm x 2.9 cm x 13.8 cm)	15.1 in x 1.8 in x 7.6 in (38.4 cm x 4.5 cm x 19.2 cm)
WEIGHT	0.5 lb (0.2 kg)	3.1 lb (1.4 kg)	5.8 lb (2.6 kg)
OPERATING SYSTEMS	AIX, HP-UX, Solaris, Linux®, Windows® 2000, Windows® XP, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows Server® 2003, Windows Server® 2008, Windows Server® 2012. Note: TCP/UDP socket services are operating system independent		
OTHER	Multiplexes all serial ports into a single TCP/IP session, minimizing Ethernet traffic; Auto-detection of either 10 Mbps or 100 Mbps Ethernet (EtherLite 80, 160 and 162 models); Field upgradeable; Supports DHCP for easy IP address configuration		

INTERFACES

SERIAL

PORTS	2 RS-232	8 RS-232	16 RS-232 (RS-232/422 switchable model)	32 RS-232
CONNECTORS	RJ-45F with built-in transient voltage suppression			
THROUGHPUT	Up to 115 Kbps on all ports simultaneously			Supports up to 115 Kbps on all ports, but not simultaneously
SIGNAL SUPPORT	TXD, RXD, RTS, CTS, DTR, DSR and DCD			

ETHERNET

PORTS	10 Mbps 10Base T; Full or Half duplex	10/100 Mbps 10/100Base T; Full or Half duplex	10 Mbps 10Base T; Full or Half duplex
--------------	--	---	--

PROCESSOR AND MEMORY

CPU	40 MHz 80C186 embedded microcontroller		
SRAM	512K at zero wait states		
EPROM	128K flash at zero wait states		

POWER REQUIREMENTS

POWER INPUT	External, 100-240 VAC, 50/60 Hz	Internal, 100-240 VAC, 50/60 Hz
POWER CONSUMPTION	15 W typical, 20 W max	20 W typical, 25 W max

ENVIRONMENTAL

OPERATING TEMPERATURE	10° C to 40° C (50° F to 104° F)
RELATIVE HUMIDITY	5% to 90% (non-condensing)
ETHERNET ISOLATION	1500 VAC min per IEEE802.3/ANSI X3.263
SERIAL PORT PROTECTION (ESD)	+15 kV human body model

APPROVALS

SAFETY	UL1950; EN 60950
EMISSIONS/IMMUNITY	FCC Class A; EN55022; Class A or B; EN55024; EN61000-3-2,3; EN50082-1,2

PART NUMBERS	DESCRIPTION
70001427	EtherLite 160 - 16-port RS-232 RJ-45 terminal server
70001428	EtherLite 162 - 16-port RS-232/RS-422 RJ-45 terminal server
70001429	EtherLite 32 - 32-port RS-232 RJ-45 terminal server with rack kit
70001430	EtherLite 2 - 2-port RS-232 RJ-45 terminal server
70001531	EtherLite 2 - 2-port RS-232 RJ-45 terminal server (International)
70001528	EtherLite 160 - 16-port RS-232 RJ-45 terminal server (International)
70001529	EtherLite 162 - 16-port RS-232/RS-422 RJ-45 terminal server (International)
70001533	EtherLite 32 - 32-port RS-232 RJ-45 terminal server with rack kit (International)
70001767	EtherLite 80 - 8-port RS-232 RJ-45 terminal server
70001768	EtherLite 80 - 8-port RS-232 RJ-45 terminal server (International)

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91000875
J1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

