

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








**ROHS COMPLIANT** 

## PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46496	06/17	GPF

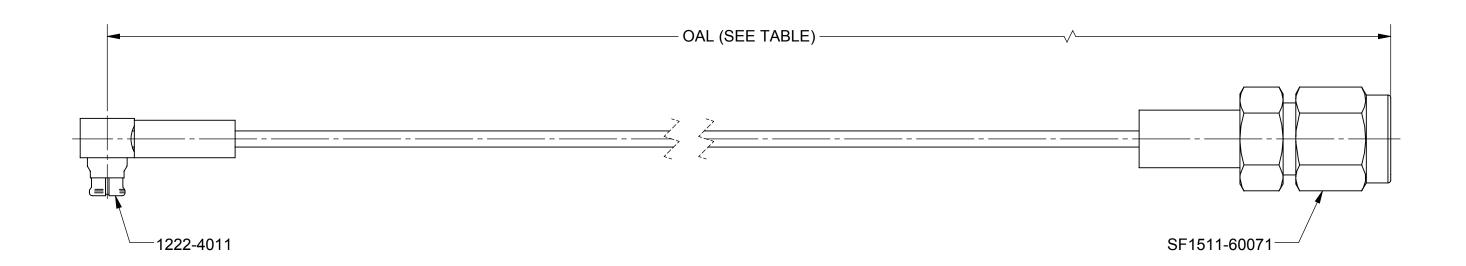

**MATERIAL:** 

2.92mm STRAIGHT PLUG (SF1511-60071) **CONNECTORS:** 

SMP R/A JACK (1222-4011)

CABLE: T-FLEX 405 (200-70-139)

SHRINK TUBING: M23053/5

**PERFORMANCE:** 

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 40.0 GHZ

MATERIAL:	SEE NOTES	DIMENSION
FINISH:	SEE NOTES	DECIMAL: .
SURFACE AR	<sup>EA:</sup> N/A	INTERPRET

PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:				
FRACTIONAL:	±1/64	ANGULAR: X° X°X'		
DECIMAL: .X	±.030	^ ^	± 10	

.XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

ACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'  CIMAL: .X ±.030	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63 MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.	
R ASME Y14.5M - 1994  THIRD ANGLE PROJECTION	7) REMOVE ALL BURRS  DRAWN:	VB 06/02/17
	CHECKED:	GPF 06/02/17
	APPROVED:	GPF 06/02/17

UNLESS OTHERWISE SPECIFIED

SV P/N	L (OAL)
7012-1287	6.000"
7012-1288	12.000"
7012-1289	24.000"

SMP FEMALE R/A TO 2.92mm MALE FOR .085 CABLE ASSEMBLY

-	95077	-1288-1289
SCALE: 1:1		SHEET 1 OF 1