



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



7012FX2 Industrial Ethernet Switch

N-Tron Networking Series



Managed Industrial Ethernet Switch

PRODUCT FEATURES

- Eight 10/100BaseTX RJ-45 ports
- Two 100BaseFX ports, ST or SC style
- Two SFP gigabit ports
- -40°C to 70°C operating temperature
- Onboard temperature sensor
- ESD and surge protection diodes on all ports
- Auto-sensing 10/100BaseTX, duplex, and MDIX
- Store-and-Forward technology
- Rugged DIN-rail enclosure
- Redundant power inputs (10-49VDC)

FULLY MANAGED FEATURES

- SNMP v1, v2, v3 and web browser management
- Configuration backup via optional SD card
- Detailed ring map and fault location charting
- N-Ring™ technology with ~30ms healing
- N-Link™ redundant N-Ring coupling
- N-View™ OPC monitoring
- RSTP - IEEE 802.1D
- IGMP auto-configuration
- 802.1Q tag VLAN and port VLAN
- 802.1p QoS, port QoS, and DSCP
- EtherNet/IP™ CIP messaging
- LLDP (Link Layer Discovery Protocol)
- Trunking and port mirroring
- 802.1d, 802.1w, 802.1D RSTP
- DHCP server, option 82 relay, option 61, IP fallback
- Local port IP addressing
- Port security—MAC address-based



BUILT FOR EXTREME CONDITIONS

The compact N-TRON® 7012FX2 fully-managed industrial Ethernet switch is ideal for industrial and utility applications that demand extreme performance under harsh conditions. Housed in a rugged industrial metal enclosure, the switch offers a powerful combination of eight 10/100BaseTX copper ports, two 100Base fiber ports, two SFP gigabit ports, and redundant power inputs for robust network support. The device boasts exceptional MTBF and extended tolerances to shock, vibration, temperature fluctuations and noise—common elements in factory floor control networks, utilities, wastewater treatment, wind turbines, rail car, intelligent traffic control and transportation applications.

ADVANCED RING TECHNOLOGY

Advanced N-Ring technology provides expanded capacity, detailed fault diagnostics, and fast ~30ms healing time for N-TRON-based rings. The integrity of the ring is continually checked by sending heart beat packets around the network. If an error is detected, the ring converts to a linear topology within ~30ms and communication is immediately restored. A detailed ring map and fault location chart may be accessed by the ring manager's web browser or the OPC server. Each N-Ring accommodates up to 250 fully-managed N-TRON switches. To establish redundancy, N-Link technology easily connects multiple N-Rings, creating additional pathways to critical applications and increasing overall resiliency.

MONITORING OPTIONS

N-TRON provides multiple tools to monitor the 7012FX2. The robust web-based interface provides a convenient dashboard to view and configure switch options, as well as monitor network traffic, alarms, and trend information. For tightly controlled environments, N-View OPC server software easily combines with HMI control and monitoring applications to form a complete surveillance solution for N-View-enabled switches. The iSNMP Software Suite is also available for link and status monitoring. For local monitoring, each switch features configurable LEDs to indicate power failure and N-Ring status.

EASY TO USE

The 7012FX2 features auto-sensing and auto-configuring 10/100BaseTX ports. Each copper port automatically negotiates for maximum speed and performance but can be hardcoded through the user interface. A high-speed processor allows wire speed capability on all ports simultaneously.

SPECIFICATIONS

Switch Properties

Number of MAC Addresses: 8000
 Aging Time: Configurable
 Latency (typical): 2.6 μ s
 Switching Method: Store-and-Forward

Case Dimensions

Height: 4.3" (10.8 cm)
 Width: 3.1" (7.9 cm)
 Depth: 4.6" (11.5 cm)
 Weight (maximum): 1.4 lbs (0.64 kg)
 DIN-Rail Mount: 35mm

Electrical

Redundant Input Voltage: 10-49VDC (regulated)
 Input Current (max): 525mA@24VDC
 BTU/hr: 44@24VDC
 N-TRON Power Supply: NTPS-24-1.3 (1.3A@24V)

Environmental

Operating Temperature: -40°C to 70°C
 Storage Temperature: -40°C to 85°C
 Operating Humidity: 5% to 95% (non condensing)
 Operating Altitude: 0 to 10,000 ft.

Shock and Vibration (Bulkhead Mounted)

Shock: 200g@10ms
 Vibration/Seismic: 50g, 5-200Hz, triaxial

Reliability

MTBF: >2 million hours

Network Media

10BaseT: \geq Cat3 cable
 100BaseTX: \geq Cat5 cable
 1000BaseT: \geq Cat5e cable

Connectors

10/100BaseTX: Eight (8) RJ-45 copper ports
 100BaseFX: Two (2) SC or ST fiber duplex ports
 1000BaseT: Up to two (2) RJ-45 gigabit copper ports
 1000BaseSX: Up to two (2) LC duplex gigabit fiber ports

Recommended Wiring Clearance

Top: 1" (2.6 cm)
 Front: 4" (10.2 cm)
 Side: 1" (2.6 cm)

100 mb Fiber Transceiver Characteristics

Fiber Length	2km*	15km**	40km**	80km**
TX Power Min	-19dBm	-15dBm	-5dBm	-5dBm
RX Sensitivity Max	-31dBm	-31dBm	-34dBm	-34dBm
Wavelength	1310nm	1310nm	1310nm	1550nm

* Multimode Fiber Optic Cable
 ** Singlemode Fiber Optic Cable

SFP Gigabit Fiber Transceiver Characteristics

Fiber Length	550m for 50/125 μ m 275m @62.5/125 μ m*	10km**	40km**	80km**
TX Power Min	-9.5dBm	-9.5dBm	-2dBm	0dBm
RX Sensitivity Max	-17dBm	-20dBm	-22dBm	-24dBm
Wavelength	850nm	1310nm	1310nm	1550nm
Assumed Fiber Loss	-3.5 to 3.75 dB/km	-0.45dB/km	-0.35dB/km	-0.25dB/km

* SX Fiber Optic Cable
 ** LX Fiber Optic Cable

Designed to comply with

- IEEE 1613 for electric utility substations
- NEMA TS1/ TS2 for traffic control

Regulatory Certifications



Certificate
 POCC
 US.AB28.B06519

FCC Part 15
 Class A

UL Listed
 Class I, Div 2
 Groups A/B/C/D
 E214222
 Industry Canada
 ICES-003 Issue 3




EtherNet/IP™

▶▶▶ 7012FX2 Specifications

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
7012FX2-XX.....	12-port (8 10/100BaseTX, 2 100BaseFX Fiber, and 2 SFP Mini-GBIC Gigabit Fiber Expansion Ports) switch
7012FXE2-XX-YY.....	12-port (8 10/100BaseTX, 2 100BaseFX Fiber, and 2 SFP Mini-GBIC Gigabit Fiber Expansion Ports) switch
NTSFP-TX.....	Optional SFP (mini-GBIC) transceiver with one 1000BaseT GB copper port
NTSFP-SX.....	Optional SFP (mini-GBIC) transceiver with one 1000BaseSX multimode GB fiber optic port
NTSFP-LX-ZZ.....	Optional SFP (mini-GBIC) transceiver with one 1000BaseLX singlemode GB fiber optic port
NTCD128.....	Optional configuration card for backup/restore
NTPS-24-1.3.....	N-TRON DIN-rail power supply (1.3 amp@24VDC)
CPMA-2.....	Compact panel mount (factory installed option)
URMK.....	Universal rack mount kit

Where: XX = ST or SC connector
 YY = 15, 40, or 80 for singlemode, blank for multimode
 ZZ = 10, 40, or 80 for GB singlemode (If SFP transceiver is not specified at the time of purchase, slots will remain blank with covers)
 E = Singlemode

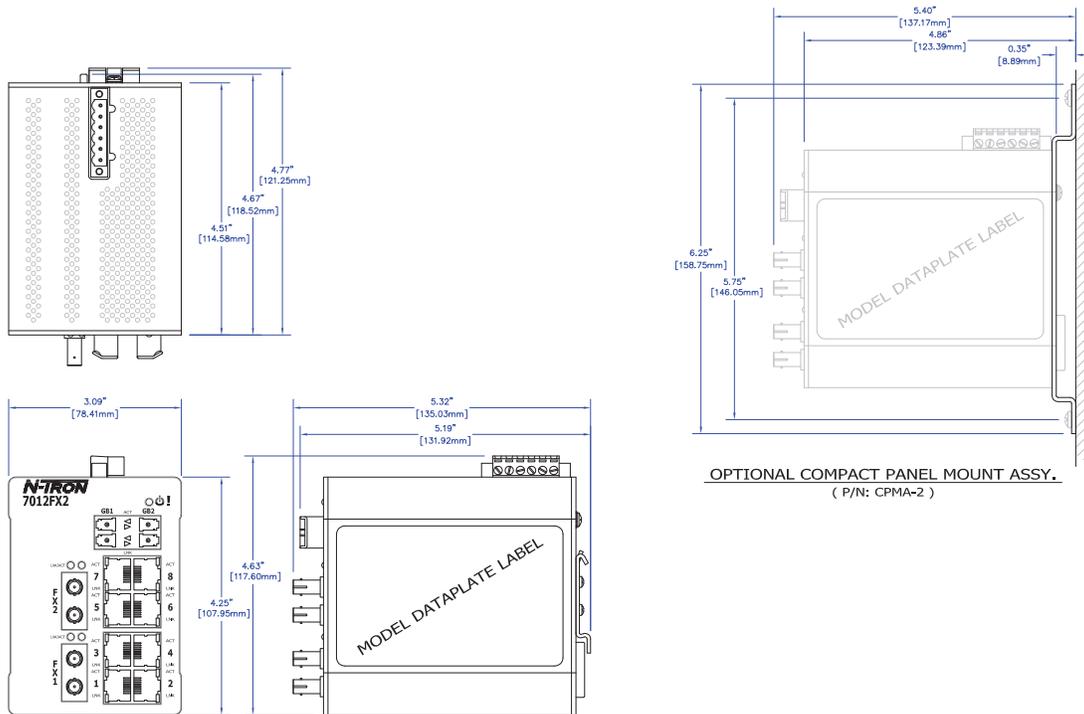

www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

Europe
Middle East
Africa
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0270 080116 © 2016 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.