



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Miniature Fuse, 10.3 x 38 mm, Quick-Acting F, 250 VAC



250 VAC · Quick-Acting F



NNO

**Description**

- Low Breaking Capacity

**References**

This type is Phase-out without alternate type  
Last order date: 20.02.2012


**Weblinks**

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

**Technical Data**

Rated Voltage	250VAC
Rated current	0.4 - 30A
Breaking Capacity	100A - 4000A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 70 °C
Climatic Category	40/070/56 acc. to IEC 60068-1
Material: Terminals	Nickel-Plated Copper Alloy
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper
Unit Weight	9 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Rated current

**Dimension**

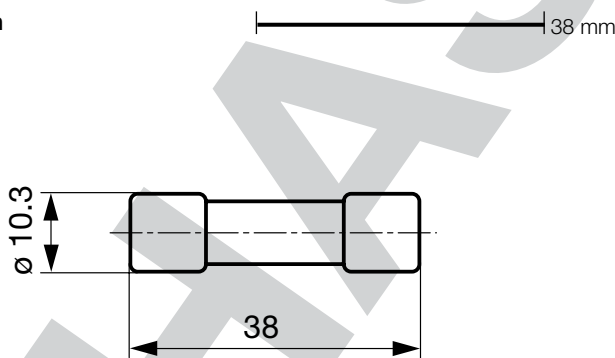


**Pre-Arcing Time**

Rated Current I<sub>n</sub>    1.1 x I<sub>n</sub> min.    1.3 x I<sub>n</sub> max.    3.0 x I<sub>n</sub> max.

0.4 A - 30 A	60 min	60 min	1 s
--------------	--------	--------	-----

Time-Current-Curves

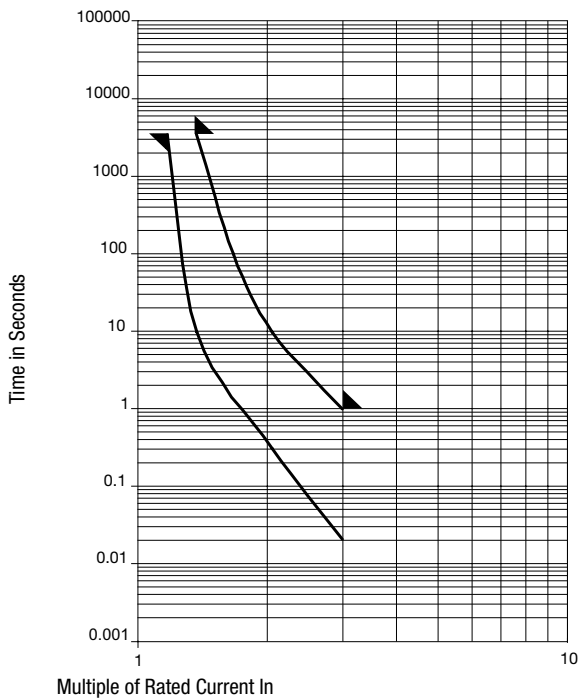

Packaging Unit Small Box Pack (10 pcs.)

PHASE OUT